

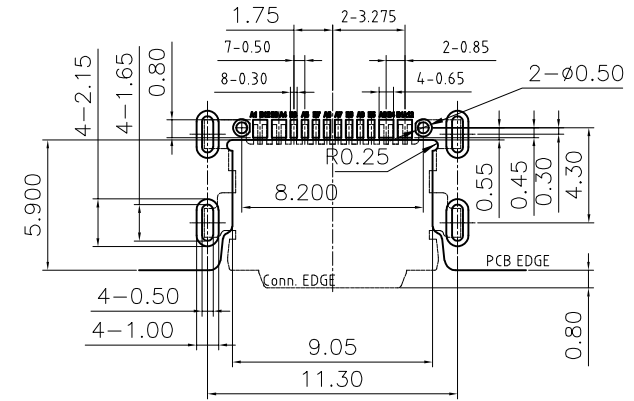


RoHS Compliant

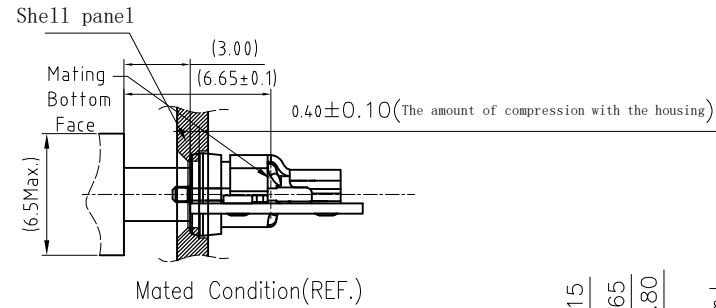

建议密封方式 Recommended sealing method

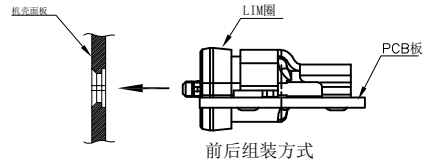

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05
STENCIL THICKNESS:0.12mm

Pin Assignments

Contact Number	Signal Name	Contact Number	Signal Name
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	± 0.30	X"	± 5"
.XX	± 0.20	.X"	± 2"
.XXX	± 0.15	.XX"	± 1"

Website: www.bsc-elec.com
Email: bestcreate@bsc-elec.com

DESIGN:
I. L

DATE:

CHECKED:
C. W

DATE:

APPROVED:
C. W

DATE:

TITLE:

IPX8 WATERPROOF 16P USB C FEMALE
CONNECTOR MID MOUNT 1.13MM

MATERILA:

PART NO:

U06-CFXX5R-W086

SIZE: A4

FINSH:

DWG NO:

U06-CFXX5R-W086

2 OF 2

REV: A

UNIT

mm

SCALE

1=1

QUALITY
SYMBOLS

