


RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

■ Specifications :

- Voltage rating: 30V AC / DC
- Current rating: 0.5A AC / DC
- Withstanding voltage: 200V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance:≥100MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤30mΩ

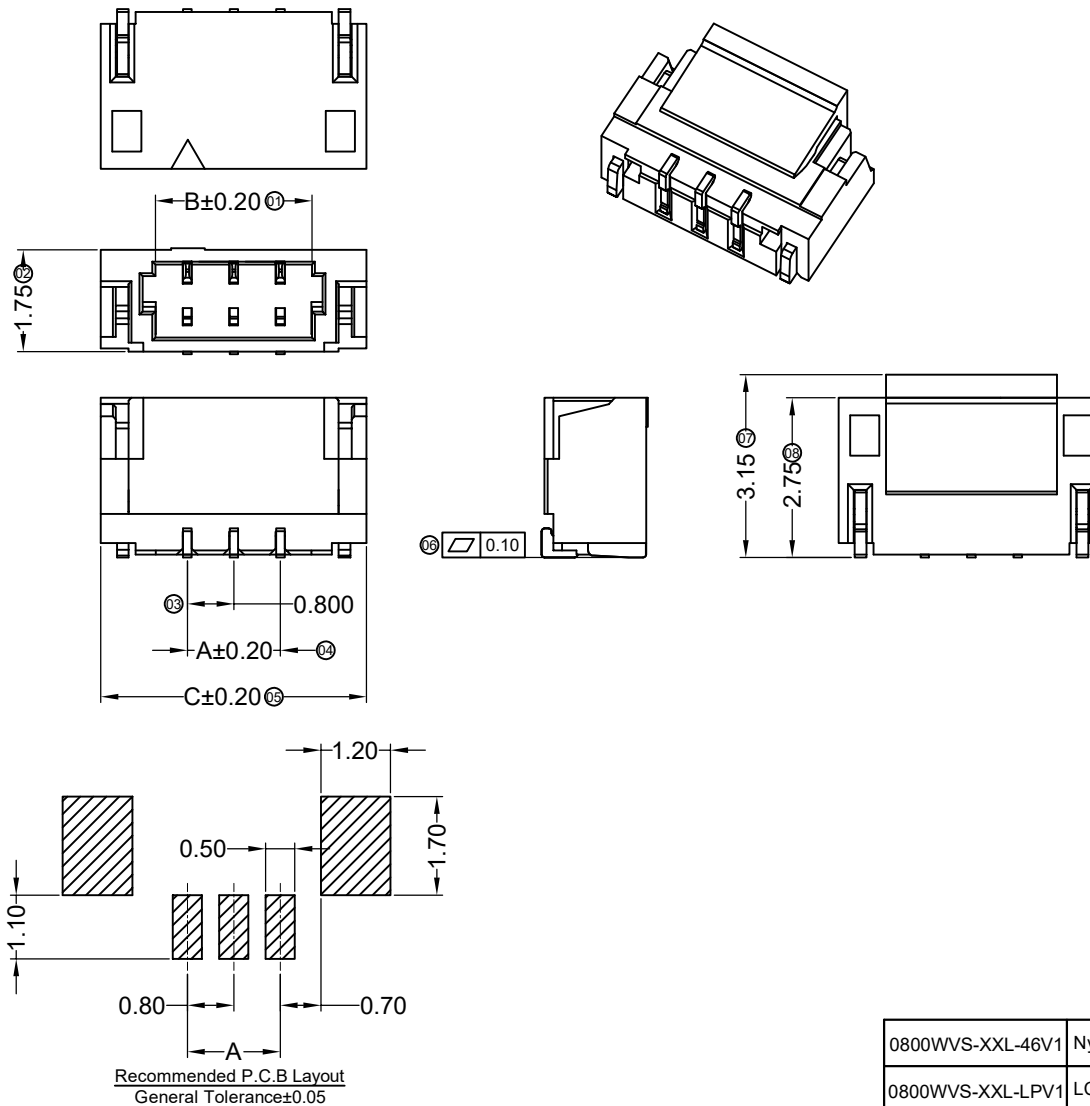

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
02	0.80	1.90	3.78	12	8.80	9.90	11.78
03	1.60	2.70	4.58	13	9.60	10.70	12.58
04	2.40	3.50	5.38	14	10.40	11.50	13.38
05	3.20	4.30	6.18	15	11.20	12.30	14.18
06	4.00	5.10	6.98	16	12.00	13.10	14.98
07	4.80	5.90	7.78	17	12.80	13.90	15.78
08	5.60	6.70	8.58	18	13.60	14.70	16.58
09	6.40	7.50	9.38	19	14.40	15.50	17.38
10	7.20	8.30	10.18	20	15.20	16.30	18.18
11	8.00	9.10	10.98				

0800WVS-XXL-46V1	Nylon 46 UL 94V-0	Phosphor Bronze	Gold-Flash	Brass	Gold-Flash	1,000Pcs
0800WVS-XXL-LPV1	LCP UL 94V-0	Phosphor Bronze	Gold-Flash	Brass	Gold-Flash	
Part No.	Material	Material(Pin)	Finish(Pin)	Material (Solder Tabs)	Finish (Solder Tabs)	Q'ty/Bag

Bestcreate Technology Limited

REV: A UNIT mm SCALE 1=1 QUALITY SYMBOLS

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	±	0.30
.XX	±	0.20
.XXX	±	0.10

Website:www.bsc-elec.com
Email:bestcreate@bsc-elec.com

DESIGN: I. L DATE: 2017. 3. 1

CHECKED: C. W DATE: 2017. 3. 1

APPROVED: C. W DATE: 2017. 3. 1

TITLE:

0.80 mm IDC Style Commconnectors

MATERIAL: PART NO: 0800WVS-XXX-XX SIZE: A4

FINISH: DWG NO: 0800WVS-XXX-XX