

RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 2A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤30mΩ

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
04	2.00	4.00	44	42.00	44.00
06	4.00	6.00	46	44.00	46.00
08	6.00	8.00	48	46.00	48.00
10	8.00	10.00	50	48.00	50.00
12	10.00	12.00	52	50.00	52.00
14	12.00	14.00	54	52.00	54.00
16	14.00	16.00	56	54.00	56.00
18	16.00	18.00	58	56.00	58.00
20	18.00	20.00	60	58.00	60.00
22	20.00	22.00	62	60.00	62.00
24	22.00	24.00	64	62.00	64.00
26	24.00	26.00	66	64.00	66.00
28	26.00	28.00	68	66.00	68.00
30	28.00	30.00	70	68.00	70.00
32	30.00	32.00	72	70.00	72.00
34	32.00	34.00	74	72.00	74.00
36	34.00	36.00	76	74.00	76.00
38	36.00	38.00	78	76.00	78.00
40	38.00	40.00	80	78.00	80.00
42	40.00	42.00			

2011WV-2*XX-6TV1	PA6T UL 94V-0	Brass	Gold-Flash	1,000Pcs
Part No.	Material	Material(Pin)	Finish(Pin)	Q'ty/Bag

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	±	0.30	X'	±	3'
.XX	±	0.20	.X'	±	2'
.XXX	±	0.10	.XX'	±	1'

Website: www.bsc-elec.com

Email: bestcreate@bsc-elec.com

DESIGN: DATE:

I. L. 2017. 3. 1

CHECKED: DATE:

C. W. 2017. 3. 1

APPROVED: DATE:

C. W. 2017. 3. 1

TITLE:

2.00 mm Headr Commctctrs

MATERILA:

PART NO:

2011WV-2*XX-6TV1

SIZE: A4

FINSH:

DWG NO:







2011WV-2*XX-6TV1

REV: A

UNIT mm

SCALE 1=1

QUALITY SYMBOLS

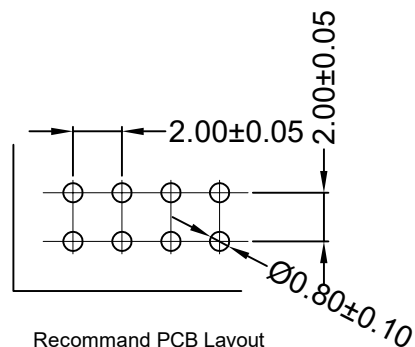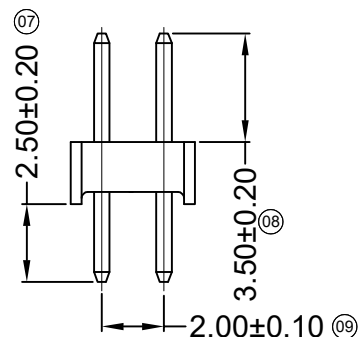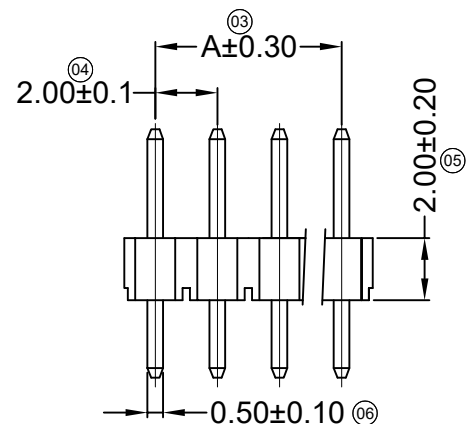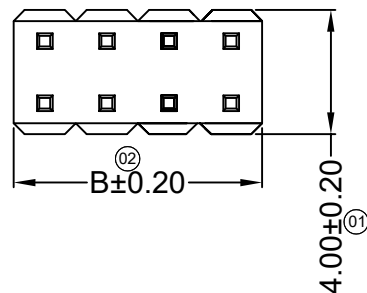

Recommnd PCB Layout