





RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

■ Specifications :

- Current rating: 3A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤30mΩ

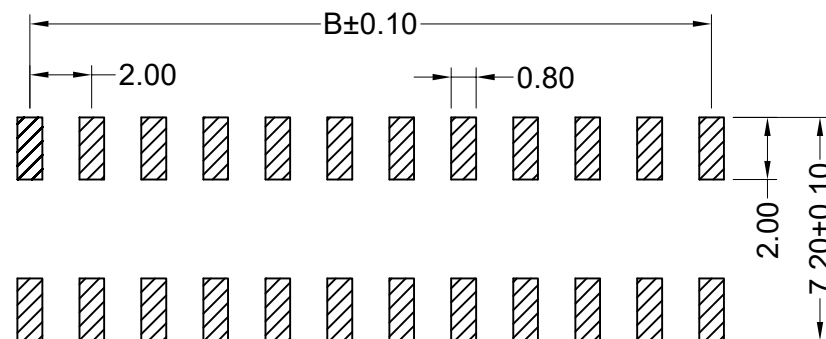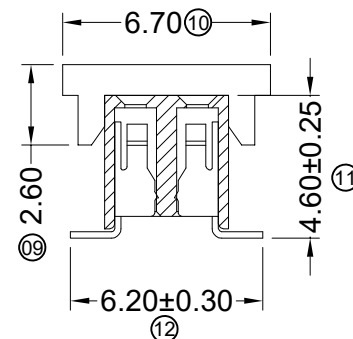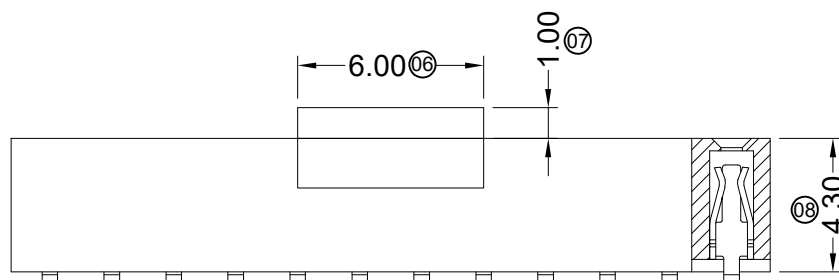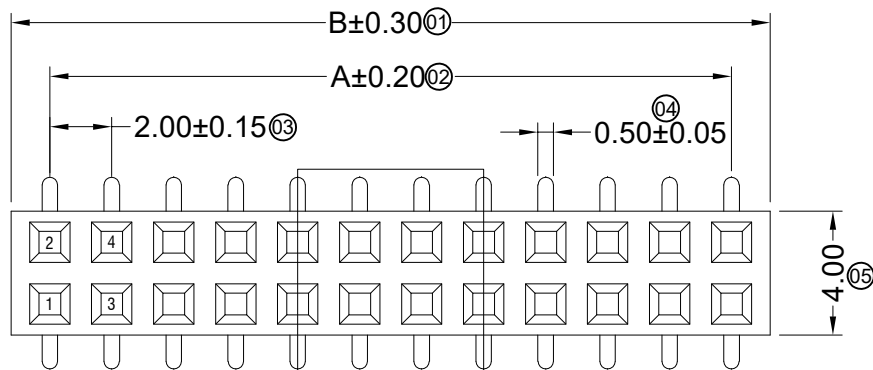

Recommended P.C.B Layout
General Tolerance±0.05

Poles	Dimensions (mm)		Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B		A	B
2*02	2.00	4.50	2*15	28.00	30.50	2*28	54.00	56.50
2*03	4.00	6.50	2*16	30.00	32.50	2*29	56.00	58.50
2*04	6.00	8.50	2*17	32.00	34.50	2*30	58.00	60.50
2*05	8.00	10.50	2*18	34.00	36.50	2*31	60.00	62.50
2*06	10.00	12.50	2*19	36.00	38.50	2*32	62.00	64.50
2*07	12.00	14.50	2*20	38.00	40.50	2*33	64.00	66.50
2*08	14.00	16.50	2*21	40.00	42.50	2*34	66.00	68.50
2*09	16.00	18.50	2*22	42.00	44.50	2*35	68.00	70.50
2*10	18.00	20.50	2*23	44.00	46.50	2*36	70.00	72.50
2*11	20.00	22.50	2*24	46.00	48.50	2*37	72.00	74.50
2*12	22.00	24.50	2*25	48.00	50.50	2*38	74.00	76.50
2*13	24.00	26.50	2*26	50.00	52.50	2*39	76.00	78.50
2*14	26.00	28.50	2*27	52.00	54.50	2*40	78.00	80.50

2011HVS-2*XX-6TV1	PA6T UL 94V-0	Phosphor Bronze	Gold Flash
PART NO	Material	Material(Pin)	Finish(Pin)

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	± 0.30	.X'	± 3'
.XX	± 0.20	.X'	± 2'
.XXX	± 0.10	.XX'	± 1'

Website: www.bsc-elec.com
Email: bestcreate@bsc-elec.com

DESIGN:

DATE:

I. L

2017. 3. 1

CHECKED:

DATE:

C. W

2017. 3. 1

APPROVED:

DATE:

C. W

2017. 3. 1

TITLE:

2.00 mm Female Header Connectors

MATERILA:

PART NO:

2011HVS-XX-6TV1

SIZE:

A4

FINSH:

DWG NO:

2011HVS-XX-6TV1

REV:

A

UNIT

mm

SCALE

1=1

QUALITY

SYMBOLS

