

RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

SPECIFICATIONS:

- 1.VOLTAGE/CURRENT RATING: 30V/0.3A AC;
- 2.WITHSTANDING VOLTAGE: 100V AC ONE MINUTE;
- 3.INSULATION RESISTANCE: 50M Ω MIN;
- 4.CONTACT RESISTANCE: 100m Ω MAX;
- 5.OPERATING TEMPERATURE RANGE: -35° C TO 85° C.

MATERIAL:






- 1.INSULATOR: LCP+30 FIBER UL 94V-0 BLACK;
- 2.TERMINAL: COPPER ALLOY C5210;
- 3.METAL FITTINGS: COPPER ALLOY C5210.

4.THIS PRODUCT COMPLIES WITH RoSH STANDARDS.

PLATING:

- 1.TERMINAL: GOLD 1u" PLATING,
NICKEL 40u" MIN. OVER ALL;
- 2.METAL FITTINGS: GOLD 1u" PLATING,
NICKEL 40u" MIN. OVER ALL .

PIN NO.	A	B	C
10	3.80	3.20	1.60
12	4.20	3.60	2.00
14	4.60	4.00	2.40
16	5.00	4.40	2.80
20	5.80	5.20	3.60
24	6.60	6.00	4.40
30	7.80	7.20	5.60
34	8.60	8.00	6.40
40	9.80	9.20	7.60
44	10.60	10.00	8.40
50	11.80	11.20	9.60

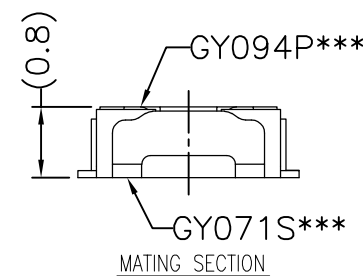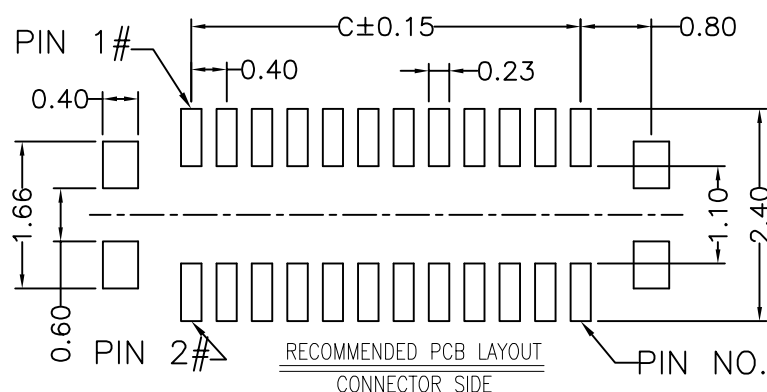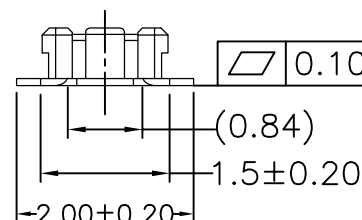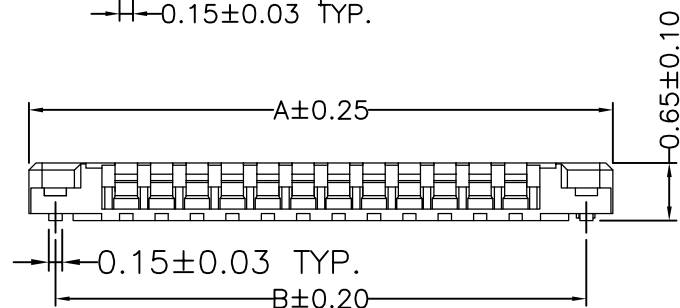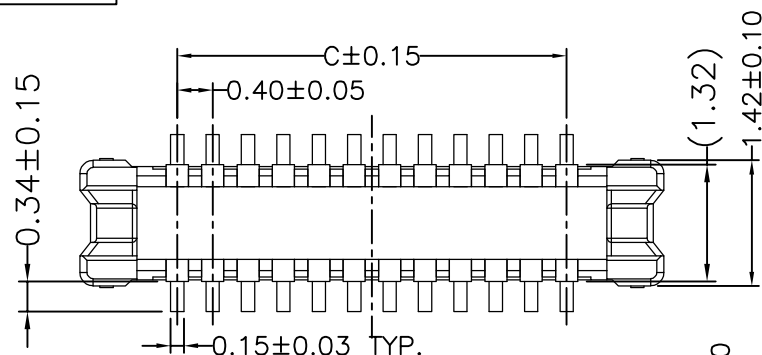

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	±	0.30	X"	±	3"
.XX	±	0.20	.X"	±	2"
.XXX	±	0.10	.XX"	±	1"

Website:www.bsc-elec.com
Email:bestcreate@bsc-elec.com

DESIGN:

DATE:

I. L

2017. 3. 1

CHECKED:

DATE:

C. W

2017. 3. 1

APPROVED:

DATE:

C. W

2017. 3. 1

TITLE:

BTB HEADER P0.40 MH0.8

MATERIAL:

PART NO:

BTBH-P040-MH08

SIZE:

A4

FINSH:

DWG NO:

BTBH-P040-MH08

REV: A

UNIT mm

SCALE 1=1

QUALITY SYMBOLS

