

RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

规格说明:Specifications:

电气特性:Electrical:






1. 额定电流: Current Rating
1.0A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗:Contact Resistance
50 milliohms MAX
4. 耐电压:Dielectric Withstanding Voltage:
300 V For one minute
5. 绝缘阻抗:Insulation Resistance:
100MEGA ohms MIN

原材料:Raw material:

1. 塑胶:Plastic cement:
Hing Temperature Thermoplastics,
LCP/Black
2. 端子:Contact:Copper Alloy C2680
3. 外壳:Shell: Copper Alloy C2680

电镀:Electroplate:

1. 端子:Contact: Plated Gold in Mating Area;
Tin On Solder Tails
2. 外壳:Shell:
Nickel Plating

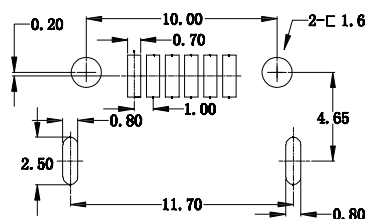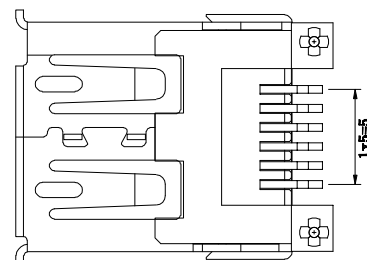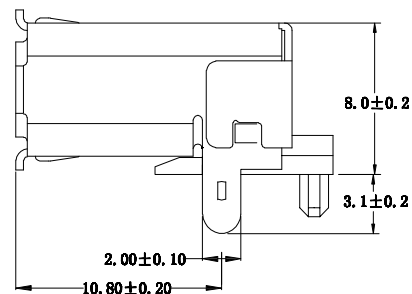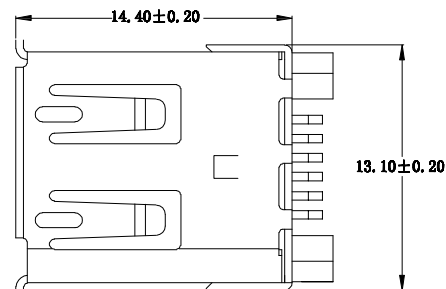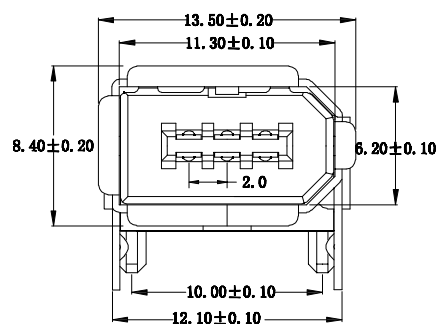

PCB LAYOUT

PART NO. INFORMATION

I01- F X X 5 T - 001

GENDER
F: FEMALE
M: MALE

CONTACT PLATED
1: GOLD FLASH
2: GOLD 3U"
3: GOLD 5U"
4: GOLD 10U"
5: GOLD 15U"
6: GOLD 30U"

PACKAGE
T: TRAY
HOUSING COLOR
2: WHITE
5: BLACK
9: NATURE

HOUSING MATERIAL
A: LCP B: PBT
C: PA9T D: PA6T
E: PA46 F: PA66

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	±	0.30	X.*	±	3°
.XX	±	0.20	.X.*	±	2°
.XXX	±	0.10	.XX.*	±	1°

Website:www.bsc-elec.com
Email:bestcreate@bsc-elec.com

DESIGN: I. L. DATE: 2021. 5. 12

CHECKED: C. W. DATE: 2021. 5. 12

APPROVED: C. W. DATE: 2021. 5. 12

TITLE: IEE1394 6P FEMALE CONNECTOR SMT

MATERILA:	PART NO: I01-FXX5T-001	SIZE: A4
FINSH:	DWG NO: I01-FXX5T-001	

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------