

RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

Features:








- 1.4~16 circuits available;
- 2.Material:PA46 UL 94V-0;
- 3.Accepts H250011-XX terminal;
- 4.Mates with H250013,H250014,H250015;
- 5.Coloe: Black/Natural

Specification:


Current rating:8A at 10A .
Voltage rating:400V AC or 400V DC Max.
Contact resistance:10mΩ Max.
Insulation resistance:100MΩ Min.
Withstanding voltage:1800VAC/minute.
Ambient temperature range: -40℃~105℃.

Dimensional infotmation(mm)


Circuits	DIM A	DIM B
4	7.70	2.50
6	10.20	5.00
8	12.70	7.50
10	15.20	10.00
12	17.70	12.50
14	20.20	15.00
16	22.70	17.50

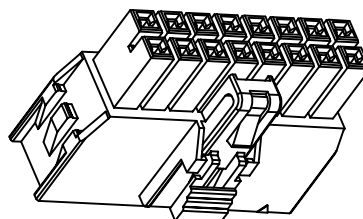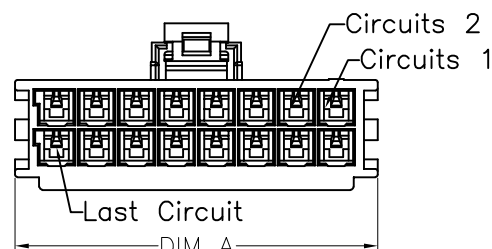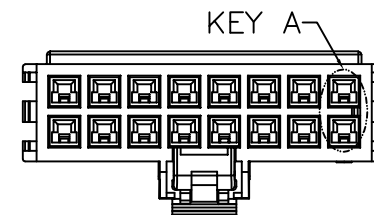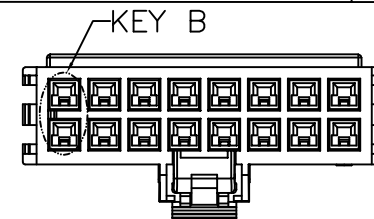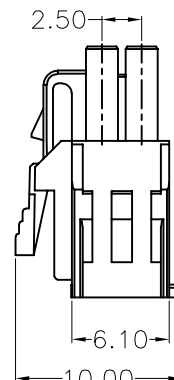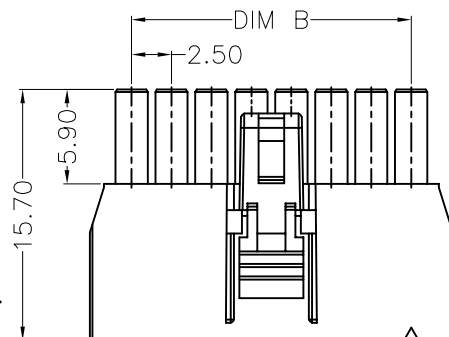

4 CKTS




6 CKTS




8 CKTS

PART NO. INFORMATION


H250012-XX-X
SERIES NO: _____
PIN Q' PY: _____
04~16
A-BLACK (KEY A)
B-NATURE (KEY B)




10 CKTS



12 CKTS



14 CKTS

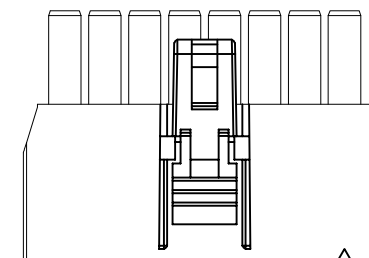

16 CKTS

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	±	0.40	X.*	±	3"
.XX	±	0.25	.X.*	±	2"
.XXX	±	0.15	.XX.*	±	1"

Website: www.bsc-elec.com

Email: bestcreate@bsc-elec.com

DESIGN: DATE: 2018.3.5

I. L. 2018.3.5

CHECKED: DATE: 2018.3.5

C. W. 2018.3.5

APPROVED: DATE: 2018.3.5

C. W. 2018.3.5

TITLE: 2.5mm dual row wire to Board housing

MATERILA: PART NO: H250012-XX-X SIZE: A4

FINSH: DWG NO: H250012-XX-X

REV: A UNIT mm SCALE 1=1 QUALITY SYMBOLS