



RoHS Compliant


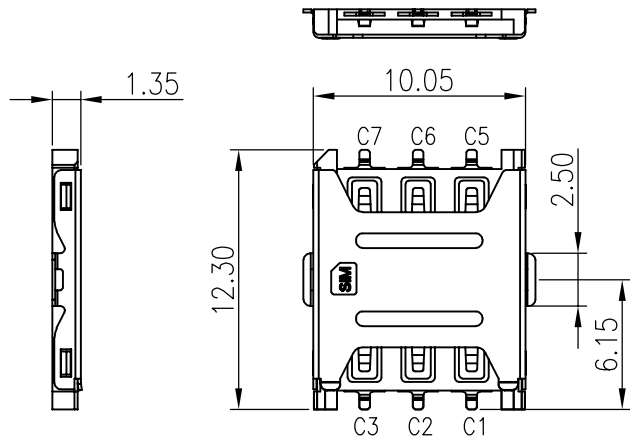


SIM pin assignment	
PIN#	Name
C1	VCC供电电压
C2	RST重置
C3	CLK时钟
C5	GND接地
C6	VPP程序电压
C7	I/O输入输出

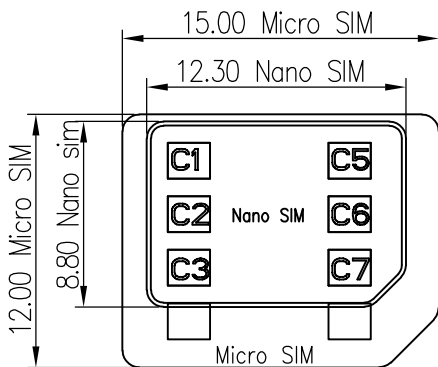

- NOTES:
- MATERIAL:
 - Insulator: High Temperature Thermoplastic, UL94V-0; Color Black.
 - Terminal: Copper Alloy.
 - Shell: Stainless Steel.
 - PLATING:
 - Contact: Plated 50u" Ni Overall Contact Au 1u",
 - Shell: Plated 50u" Ni Overall, PAD Au 1u"
 - SPECIALITY:
 - Current Rating :0.5mA AC/DC max.
 - Voltage Rating :125V AC/DC
 - Ambient Temperature Range :-20°C~+60°C
 - Storage Temperature Range :-40°C~+70°C
 - Ambient Humidity Range :95% R.H. Max.
 - Contact Resistance:100mΩ max.
 - Insulation Resistance:1000MΩ min./500VDC
 - Mating Cycles:10,000 Insertions
 - Reflow peak temp.:260°C ±5°C, 3~5 S
 - Mating Cycles:3,000 Insertions Min
 - PLEASE CONTACT LQ SALES REPRESENTATIVE TO VERIFY PRODUCT DETAILS & AVAILABILITY

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

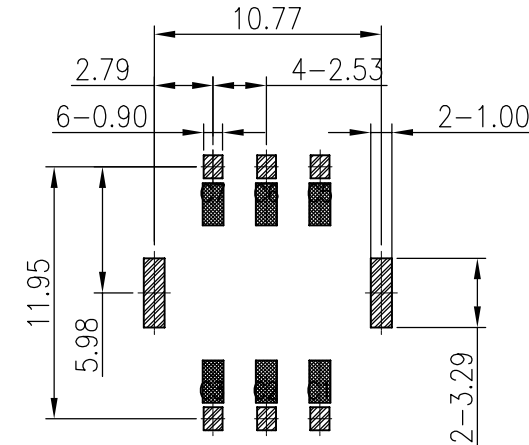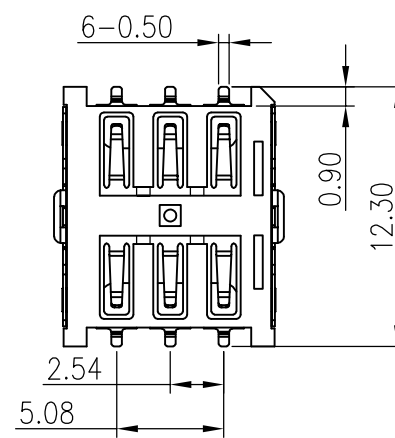

RECOMMENDED PCB LAYOUT
PATTERN PROHIBITION AREA

PART NO. INFORMATION

NSIM - 06 X X 5 R - 011

- 06:6P
- CONTACT PLATED
1: GOLD FLASH
2: GOLD 3U"
3: GOLD 5U"
4: GOLD 10U"
5: GOLD 15U"
6: GOLD 30U"
- PACKAGE
R: TAPE REEL
- HOUSING COLOR
2: WHITE
5: BLACK
9: NATURE
- HOUSING MATERIAL
A: LCP B: PBT
C: PA9T D: PA6T
E: PA46 F: PA66

2	Housing	1PC	LCP UL94V-0	BLACK
1	SHELL	1PC	Stainless Steel	Plated 50u" Ni Overall, PAD Au 1U
No.	Description	Dosage	Material	Color/plating

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:			
.X	±	0.30	X.* ± 5'
.XX	±	0.20	.X.* ± 2'
.XXX	±	0.10	.XX.* ± 1'
Website: www.bsc-elec.com			
Email: bestcreate@bsc-elec.com			

DESIGN: I.L	DATE: 2017.3.1	TITLE: NANO-SIM 卡座 6Pin 1.35H 有定位柱	
CHECKED: C.W	DATE: 2017.3.1	MATERIAL: FINISH:	PART NO: NSIM-06XX5R-011
APPROVED: C.W	DATE: 2017.3.1	DWG NO: NSIM-06XX5R-011	SIZE: A4
		1 OF 2	

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------

RoHS Compliant


REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

NOTES

1. NUMBER OF CONNECTORS:1800PCS/REEL

2. LEAD TAPE LENGTH

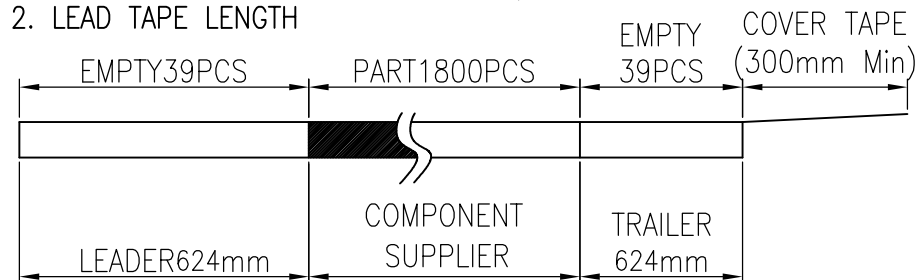

3. QUANTITY:18000PCS/CARTON

4. WEIGHT :

3.1 NET WEIGHT : Kg

3.2 GROSS WEIGHT : Kg

A

A

B

B

C

C

D

D

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	±	0.30	X.*	±	5"
.XX	±	0.20	.X.*	±	2"
.XXX	±	0.10	.XX.*	±	1"

Website:www.bsc-elec.com
Email:bestcreate@bsc-elec.com

DESIGN:

I. L

CHECKED:

C. W

APPROVED:

C. W

DATE:

2017. 3. 1

DATE:

2017. 3. 1

DATE:

2017. 3. 1

TITLE:

NANO-SIM 卡座 6Pin 1.35H 有定位柱

MATERIAL:

FINISH:

PART NO:

DWG NO:

SIZE:


2 OF 2

REV: A

UNIT mm

SCALE 1=1

QUALITY SYMBOLS



1

2

3

4

5

6

7

8