
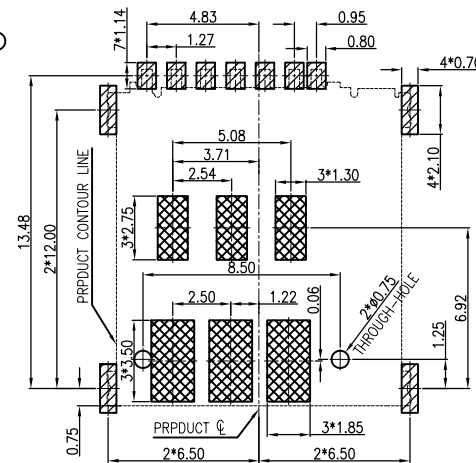
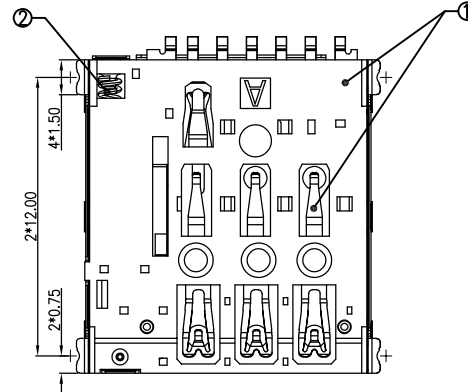



RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

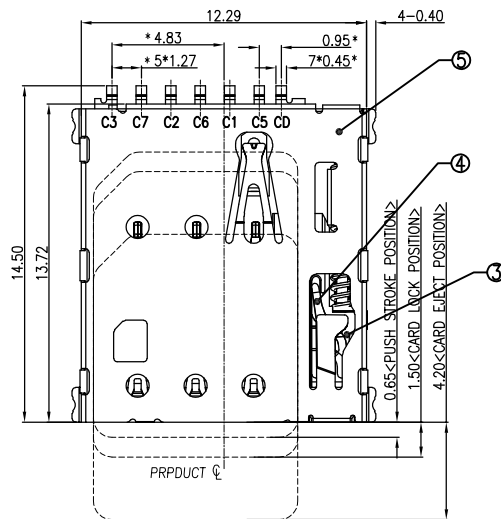

RECOMMENDED PCB LAYOUT TOP VIEW (TOLERANCE:±0.05)
RECOMMENDED METAL MASK T=0.12mm

▨ SMT SOLDER AREA
▩ NO PATTERN AND VIA HOLE IN HTIS AREA

NOTES:


- TECHNICAL SPECIALITY:
RATED VOLTAGE: 30V AC MAX.
CURRENT RATING: 0.5A MAX.
INSULATION RESISTANCE:1000MΩ MIN
CONTACT REISTANCE:100mΩ MAX
WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTES
OPERATING TEMPERATURE: -25℃~+85℃Humidity 80% R.H MAX
INSERTION FORCE: 35 N Maximum;
WITHDRAWAL FORCE: 0.5 N Minimum
- DIMENSIONS WITH MARK" * "MUST BE MEASURE
BY QC AND IPQC

PART NO. INFORMATION

NSIM - 07 X X 5 R - 015

07:7P
CONTACT PLATED
1: GOLD FLASH
2: GOLD 3U"
3: GOLD 5U"
4: GOLD 10U"
5: GOLD 15U"
6: GOLD 30U"
PACKAGE
R: TAPE REEL
HOUSING COLOR
2: WHITE
5: BLACK
9: NATURE
HOUSING MATERIAL
A: LCP B: PBT
C: PA9T D: PA6T
E: PA46 F: PA66

5	外壳	材质: SUS304 T=0.12mm 镀镍30u",焊脚镀金G/F	1Pcs
4	拉杆	材质: SUS304	1Pcs
3	滑块	材质: LCP UL 94V-0 黑色	1Pcs
2	弹簧	材质: SWP	1Pcs
1	MD主体	胶料 材质: LCP UL 94V-0 黑色 端子 材质: C5210 T=0.10mm 镍底30u 接触区+焊脚镀金G/F	1Pcs
No.	品名	规格	数量

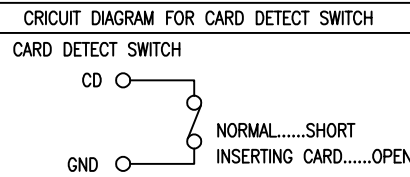

PIIN/NO	ASSIGNMENT
C1	VCC
C2	RST
C3	CLK
CD	Detect Switch
C5	GND
C6	VPP
C7	I/O

Bestcreate Technology Limited

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	±	0.30	X.*	±	5'
.XX	±	0.20	.X.*	±	2'
.XXX	±	0.10	.XX.*	±	1'

Website:www.bsc-elec.com
Email:bestcreate@bsc-elec.com

DESIGN: I.L	DATE: 2017.3.1
CHECKED: C.W	DATE: 2017.3.1
APPROVED: C.W	DATE: 2017.3.1

TITLE: 1.37H NANO SIM CARD CONNECTOR		
MATERILA:	PART NO: NSIM-07XX5R-015	SIZE: A4
FINSH:	DWG NO: NSIM-07XX5R-015	1 OF 2

RoHS Compliant


REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

NOTES

1. NUMBER OF CONNECTORS:1500PCS/REEL

2. LEAD TAPE LENGTH

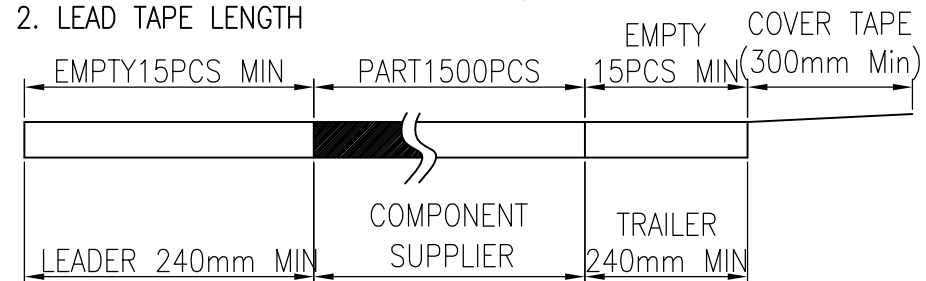

3. QUANTITY:15000PCS/CARTON

4. WEIGHT :

3.1 NET WEIGHT : Kg

3.2 GROSS WEIGHT : Kg

A

B

C

D

A

B

C

D

User Direction of Unreeling

16.00

24.00

COVER TAPE PEELING ANGLE:165°~180°

PEELING FORCE:20~130g

CARRIER TAPE

User Direction of Unreeling



DETAIL B

DETAIL B

1.90

120.00°

10.50

4-TRIANGLE PARTITION
380*235*5 K3KCARTON
342*342*315 K=K**Bestcreate Technology Limited**

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	±	0.30	X.*	±	5"
.XX	±	0.20	.X.*	±	2"
.XXX	±	0.10	.XX.*	±	1"

Website:www.bsc-elec.com

Email:bestcreate@bsc-elec.com

DESIGN:

I. L

CHECKED:

APPROVED:

C. W

DATE:

2017. 3. 1

DATE:

2017. 3. 1

DATE:

2017. 3. 1

TITLE:

1. 37H NANO SIM CARD CONNECTOR

MATERIAL:

PART NO:

NSIM-07XX5R-015

SIZE:

A4

FINISH:

DWG NO:

NSIM-07XX5R-015

2 OF 2

REV:


A

UNIT

mm

SCALE

1=1

QUALITY
SYMBOLS

1

2

3

4

5

6

7

8