

RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

A

B

C





D

A

B

C

D

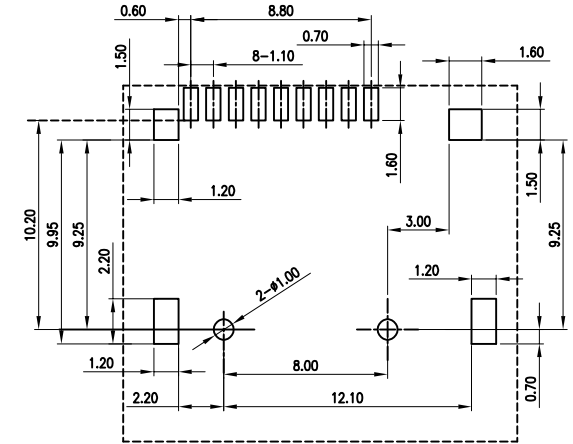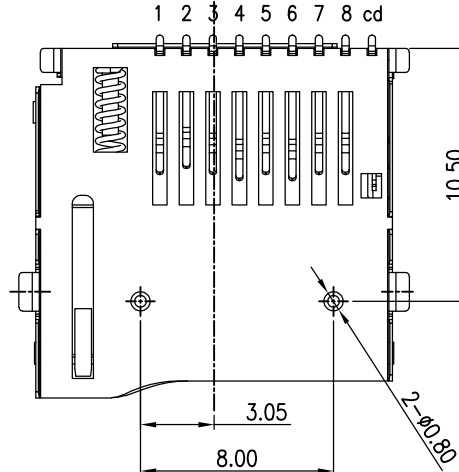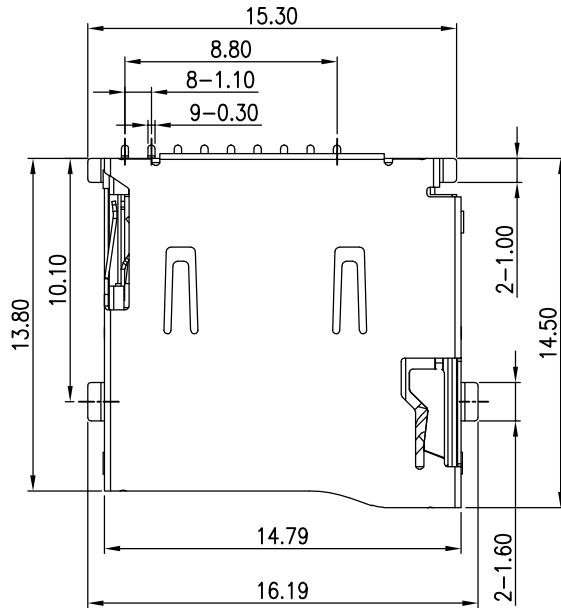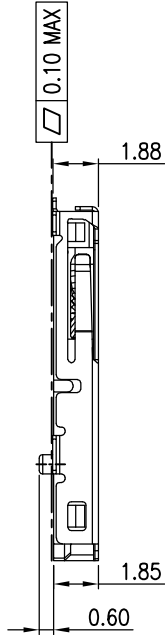

(RECOMMENDED/P.C.B)HOLE LAYOUT
COMPONENT SIDE VIEW TOLERANCE:±0.05

规格说明:

1.尺寸测量:

1-1: "▲"为重点检验尺寸;

2.电气特性:

2-1: 额定接触电流: 0.5A Max;

2-2: 接触电阻: 100 mΩ Max;

2-3: 绝缘电阻: 1000MΩ MIN. 500V DC 测试时长1分钟。

3.机械特性:

3-1: 锁退卡耐久:5000 cycles;

3-2: 插卡力: 40N MAX;

3-3: 退卡力: 1.0N Min.

4.环境特性:

4-1: 测试温度范围: -25 ℃ to +85 ℃;

4-2: 盐雾测试: 5% 浓度盐水 端子镀锡区域喷雾8H、刷金

区域喷雾24H、外壳盐雾24H。

PART NO. INFORMATION

TFWF - 09 X X 5 R - 014

09:9P

CONTACT PLATED

1: GOLD FLASH

2: GOLD 3U"

3: GOLD 5U"

4: GOLD 10U"

5: GOLD 15U"

6: GOLD 30U"

PACKAGE

R: TAPE REEL

HOUSING COLOR

2: WHITE

5: BLACK

9: NATURE

HOUSING MATERIAL



A: LCP B: PBT

C: PA9T D: PA6T

E: PA46 F: PA66

NO.	ASSIGNMENT
1#	DAT2
2#	CD/DAT3 ²
3#	CMD
4#	VDD
9#	CD
5#	CLK
6#	VSS
7#	DATO
8#	DAT1

CIRCUIT:



Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	±	0.35	X.*	±	5°
.XX	±	0.25	.X.*	±	2°
.XXX	±	0.15	.XX.*	±	1°

Website:www.bsc-elec.com

Email:bestcreate@bsc-elec.com

DESIGN:

I.L

CHECKED:

APPROVED:

C.W

DATE:

2017.3.1

DATE:

2017.3.1

DATE:

2017.3.1

TITLE:

TF 卡座 外焊9Pin 贴片式
双压片平脚镀镍 透明载带自粘

MATERIAL:

FINISH:

PART NO:

DWG NO:

SIZE:

SHEET:

1 OF 2

REV:

A

UNIT


mm

SCALE

1=1

QUALITY

SYMBOLS



1

2

3

4

5

6

7

8

RoHS Compliant


REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

NOTES

1. 每卷包装数量:1000PCS/每卷

2. 卷带包装方式:

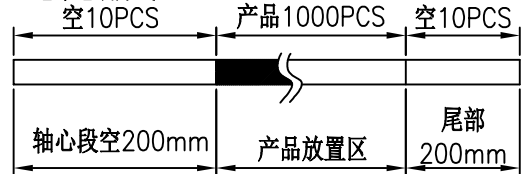

3. 每箱包装数量:10000PCS/箱

4. 重量:

4.1 净重: Kg

4.2 毛重: Kg

载带剥离角度:165°~180°

剥离力:20~130g

载带

10卷

胶带封装

标签

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	±	0.35	X.*	±	5°
.XX	±	0.25	.X*	±	2°
.XXX	±	0.15	.XX*	±	1°

Website:www.bsc-elec.com
Email:bestcreate@bsc-elec.com

DESIGN:

DATE:

I. L

2017. 3. 1

CHECKED:

DATE:

C. W

2017. 3. 1

APPROVED:

DATE:

C. W

2017. 3. 1

TITLE:

TF 卡座 外焊9Pin 贴片式
双压片平脚镀镍 透明载带自粘

MATERILA:

PART NO:

TFWF-09XX5R-014

SIZE:

A4

FINSH:

DWG NO:

TFWF-09XX5R-014

SHEET:

2 OF 2

REV:

A

UNIT

mm

SCALE

1=1

QUALITY
SYMBOLS

