
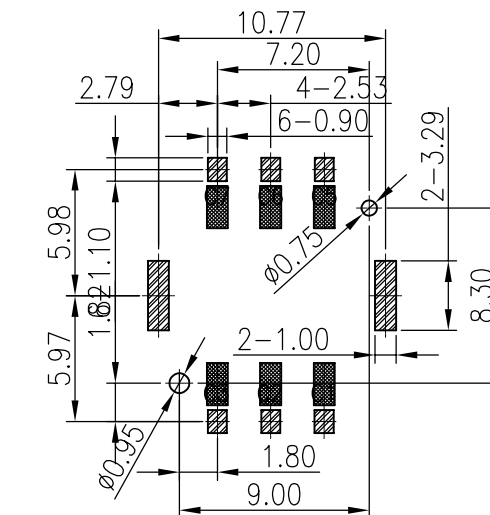
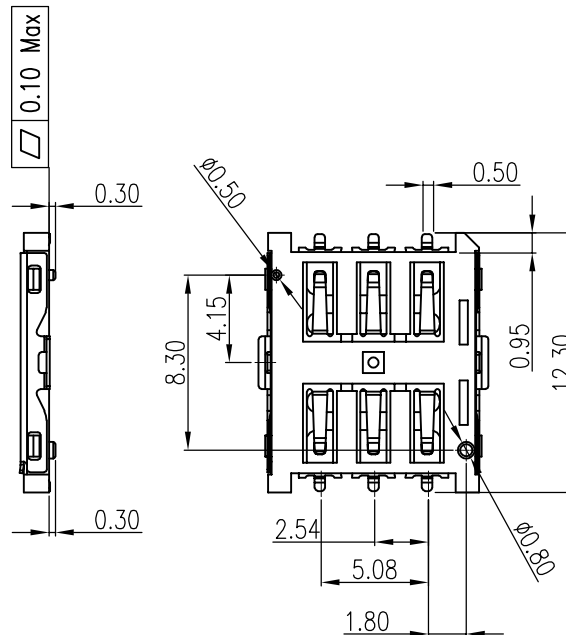


RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

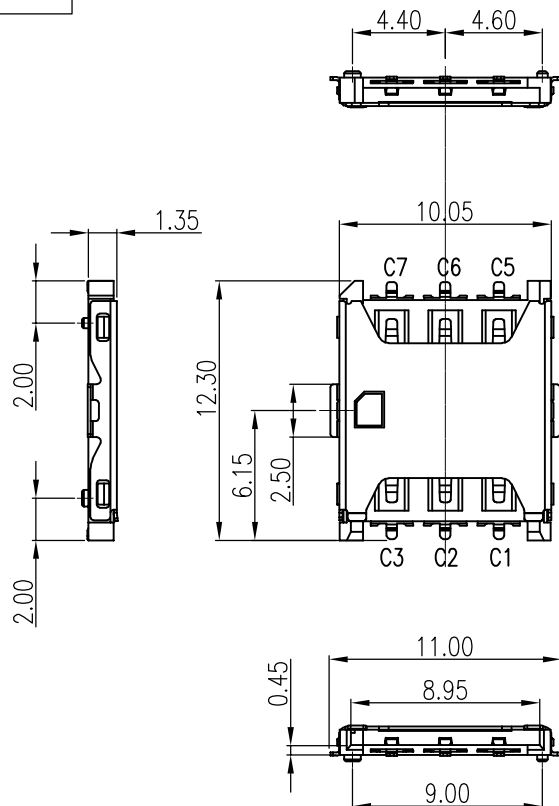

RECOMMENDED PCB LAYOUT

PATTERN PROHIBITION AREA

NOTES:

1. MATERIAL:

1.1 Insulator: High Temperature Thermoplastic, UL94V-0; Color Black.

1.2 Terminal: Copper Alloy.

1.3 Shell: Stainless Steel.

2. PLATING:

2.1 Contact: Plated 50u" Ni Overall Contact Au 1u",

2.2 Shell: Plated 50u" Ni Overall, PAD Au 1u"

3. SPECIALITY:

2.1 Current Rating :0.5mA AC/DC max.

2.2 Voltage Rating :125V AC/DC

2.3 Ambient Temperature Range :-20° C~+60° C

2.4 Storage Temperature Range :-40° C~+70° C

2.5 Ambient Humidity Range :95% R.H. Max.

2.6 Contact Resistance:100mΩ max.

2.7 Insulation Resistance:1000MΩ min./500VDC

2.8 Mating Cycles:10,000 Insertions

2.9 Reflow peak temp.: 260° C ±5° C, 3~5 S

2.10 Mating Cycles:3,000 Insertions Min

4. PLEASE CONTACT LQ SALES REPRESENTATIVE TO VERIFY PRODUCT DETAILS & AVAILABILITY

Part number information:

SIM -06 X X 5 R - 011

06:06P

CONTACT PLATED

1: GOLD FLASH

2: GOLD 30U"

3: GOLD 5U"

4: GOLD 10U"

5: GOLD 15U"

6: GOLD 30U"

PACKAGE

R: TAPE REEL

HOUSING COLOR

2: WHITE

5: BLACK

9: NATURE

HOUSING MATERIAL

A: LCP B: PBT

C: PA9T D: PA6T

E: PA46 F: PA66

SIM pin assignment	
PIN#	Name
C1	VCC 供电电压
C2	RST 重置
C3	CLK 时钟
C5	GND 接地
C6	VPP 程序电压
C7	I/O 输入输出

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	± 0.30	X.*	± 5°
.XX	± 0.20	.X.*	± 2°
.XXX	± 0.10	.XX.*	± 1°

Website: www.bsc-elec.com

Email: bestcreate@bsc-elec.com

DESIGN:

I. L

CHECKED:

C. W

APPROVED:

C. W

DATE:

2017. 3. 1

DATE:

2017. 3. 1

DATE:

2017. 3. 1

TITLE:

NANO-SIM 卡座 6Pin 1.35H 有定位柱无凸台

MATERIAL:

FINISH:

PART NO:

DWG NO:

SIZE:

SHEET:


1 OF 2

REV: A

UNIT mm

SCALE 1=1

QUALITY SYMBOLS



RoHS Compliant


REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

NOTES

1. NUMBER OF CONNECTORS:1800PCS/REEL

2. LEAD TAPE LENGTH

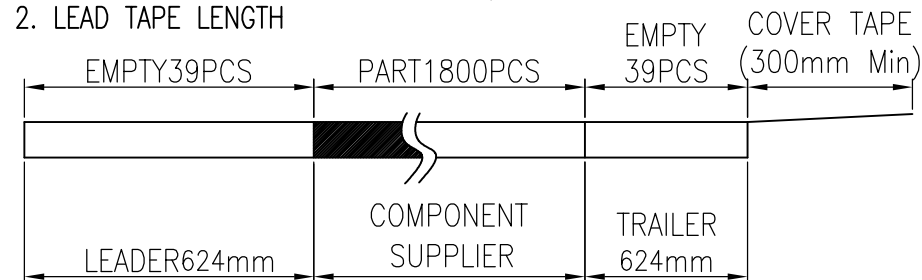


3. QUANTITY:18000PCS/CARTON

4. WEIGHT :

3.1 NET WEIGHT : Kg

3.2 GROSS WEIGHT : Kg

User Direction of Unreeling

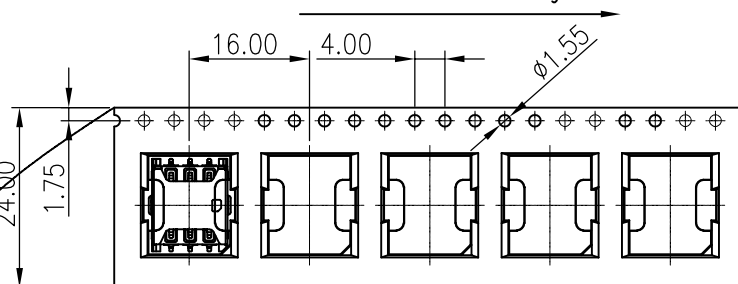

COVER TAPE PEELING ANGLE:165°~180°
PEELING FORCE:20~130g


CARRIER TAPE

User Direction of Unreeling

DETAIL B

DETAIL B

10-REEL



CARTON
345*345*310 K=K

Polybag

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	± 0.30	X.*	± 5"
.XX	± 0.20	.X.*	± 2"
.XXX	± 0.10	.XX.*	± 1"

Website:www.bsc-elec.com
Email:bestcreate@bsc-elec.com

DESIGN:

I. L

CHECKED:

APPROVED:

C. W

DATE:

2017. 3. 1

DATE:

2017. 3. 1

DATE:

2017. 3. 1

TITLE:

NANO-SIM 卡座 6Pin 1.35H 有定位柱无凸台

MATERIAL:

PART NO:

SIM-06XX5R-011

FINISH:

DWG NO:

SIM-06XX5R-011

SIZE:

A4

SHEET:

2 OF 2

REV:

A

UNIT

mm

SCALE

1=1

QUALITY
SYMBOLS

