

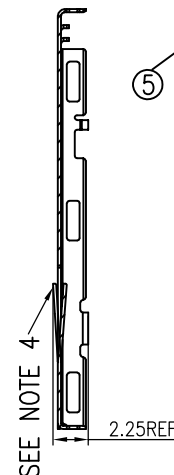



RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

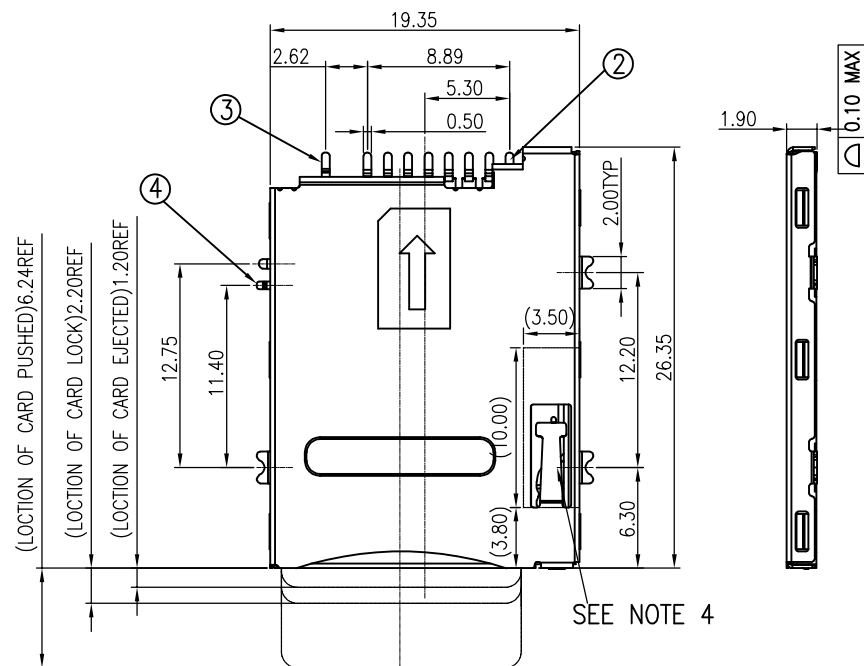

PIN NO.	Description
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	I/O
C8	Reserved

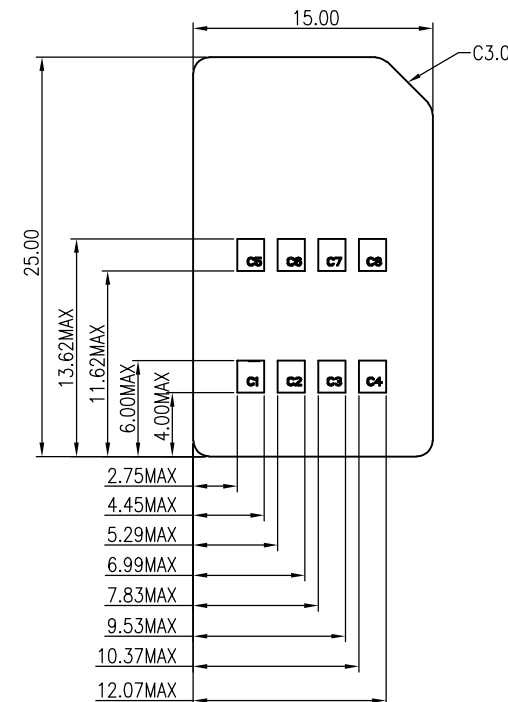


APPLICABLE CARD SIZE
THICKNESS:0.76±0.08MM

Part number information:

SIM -08 X X 5 R - 011

08:08P
CONTACT PLATED
1: GOLD 3U"
2: GOLD 5U"
3: GOLD 10U"
4: GOLD 15U"
5: GOLD 30U"
6: GOLD 30U"
PACKAGE
R: TAPE REEL
HOUSING COLOR
2: WHITE
5: BLACK
9: NATURE
HOUSING MATERIAL
A: LCP B: PBT
C: PA9T D: PA6T
E: PA46 F: PA66



Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	±	0.30	X.*	±	5"
.XX	±	0.20	.X.*	±	2"
.XXX	±	0.10	.XX.*	±	1"

Website:www.bsc-elec.com
Email:bestcreate@bsc-elec.com

DESIGN: I.L
DATE: 2017.3.1

CHECKED: C.W
DATE: 2017.3.1

APPROVED: C.W
DATE: 2017.3.1

TITLE:

NANO-SIM 卡座 6Pin 1.35H 有定位柱无凸台


MATERIAL:	PART NO: SIM-08XX5R-010	SIZE: A4
FINISH:	DWG NO: SIM-08XX5R-010	SHEET: 1 OF 3

REV: A


UNIT mm

SCALE 1=1

QUALITY SYMBOLS



RoHS Compliant

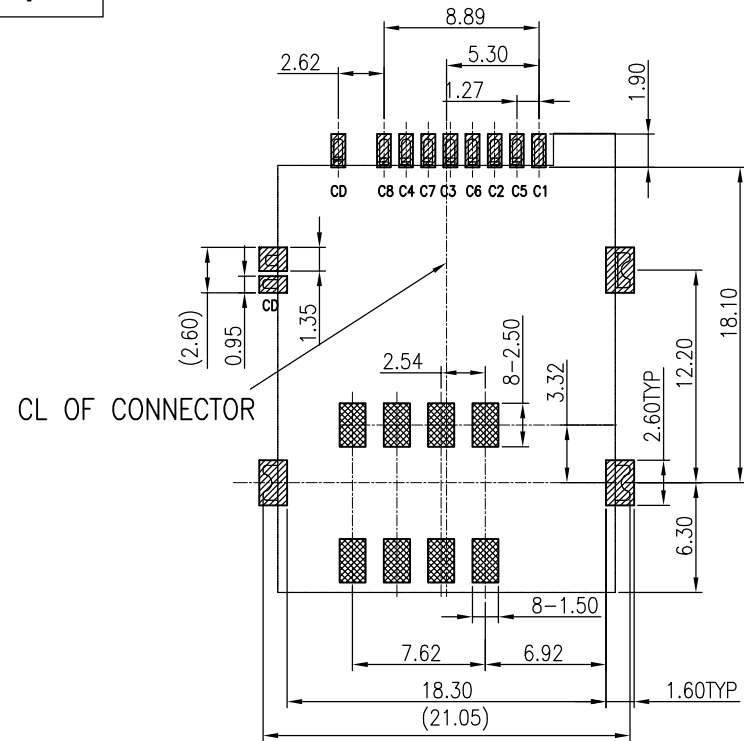

PATTERN PROHIBITION AREA

RECOMMENDED PCB LAYOUT
ALL TOLERANCE $\pm 0.05\text{MM}$



CARD INSERTING POSITION	OPEN
NO CARD POSITION	CLOSED

NOTES:

1. FINISH:

1.1 CONTACT:

30u"MIN NICKEL UNDER PLATED,1u"MIN GOLD PLATING ON CONTACT AREA,Solder foot brushed gold G/F

1.2 SHELL:

30u"NICKEL UNDER PLATED;
Solder foot brushed gold G/F.

1.3 DETECT PIN:

30u"MIN NICKEL UNDER PLATED,1u"MIN GOLD PLATING ON CONTACT AREA,Solder foot brushed gold G/F.

2.SOLDER TAIL COPLANARITY:0.08MM MAX;

3.COMPLIANCE WITH HSF DIRECTIVE.

4.MAXIMAL TOTAL HEIGHT WHEN INSERTING SIM CARD ,NEED AVOID THIS AREA

5. SPECIALITY:

2.1 RATED CURRENT:0.5A

2.2 RATED VOLTAGE:12V

2.3 CONTACT RESISTANCE:100m Ω MAX

2.4 INSULATION RESISTANCE:1000M Ω MIN 250V DC 1000M Ω MIN

2.5 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC.

2.6 OPERATING CONDITION:TEMPERATURE-40 $^{\circ}\text{C}\sim+85^{\circ}\text{C}$;
HUMIDITY 80% R.H MAX

6.METALMASK THICKNESS 0.10MM MIN

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	$\pm$	0.30	X.*	$\pm$	5"
.XX	$\pm$	0.20	.X.*	$\pm$	2"
.XXX	$\pm$	0.10	.XX.*	$\pm$	1"

Website:www.bsc-elec.com
Email:bestcreate@bsc-elec.com

DESIGN:

I. L

CHECKED:

C. W

APPROVED:

C. W

DATE:

2017. 3. 1

DATE:

2017. 3. 1

DATE:

2017. 3. 1

TITLE:

NANO-SIM 卡座 6Pin 1.35H 有定位柱无凸台

MATERILA:

FINSH:

PART NO:

DWG NO:

SIZE:


SHEET:

REV: A

UNIT mm

SCALE 1=1

QUALITY SYMBOLS



1

2

3

4

5

6

7

8

RoHS Compliant


REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

NOTES

1. NUMBER OF CONNECTORS:500PCS/REEL

2. LEAD TAPE LENGTH

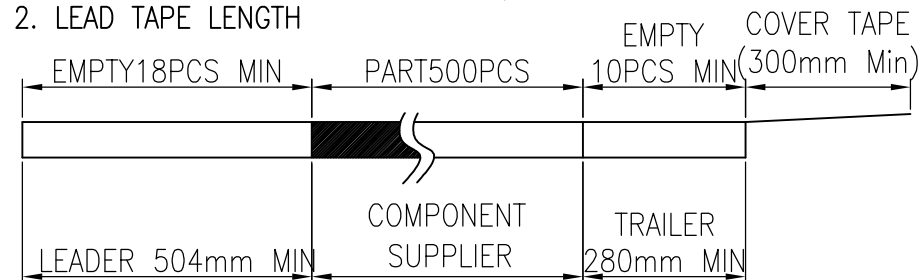


3. QUANTITY:3000PCS/CARTON

4. WEIGHT :

3.1 NET WEIGHT : Kg

3.2 GROSS WEIGHT : Kg

User Direction of Unreeling

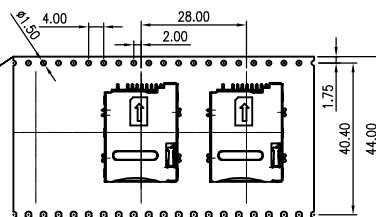


COVER TAPE PEELING ANGLE:165°~180°

PEELING FORCE:20~130g

CARRIER TAPE

User Direction of Unreeling

DETAIL B

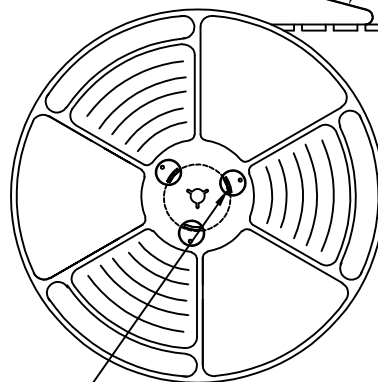


DETAIL B

6-REEL

4-TRIANGLE PARTITION

CARTON
340*340*320 K=K



Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	±	0.30	X.*	±	5"
.XX	±	0.20	.X*	±	2"
.XXX	±	0.10	.XX*	±	1"

Website:www.bsc-elec.com

Email:bestcreate@bsc-elec.com

DESIGN:

I. L

CHECKED:

C. W

APPROVED:

C. W

DATE:

2017. 3. 1

DATE:

2017. 3. 1

DATE:

2017. 3. 1

TITLE:

NANO-SIM 卡座 6Pin 1.35H 有定位柱无凸台

MATERIAL:

PART NO:

SIM-08XX5R-010

SIZE:

A4

FINISH:

DWG NO:

SIM-08XX5R-010

SHEET:

3 OF 3

REV:

A

UNIT

mm

SCALE

1=1

QUALITY
SYMBOLS

