

RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

规格说明 Specifications:

电气特性 Electrical:

- 额定电流: Current Rating
1.5A/ 2.0A 3.0A contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触电阻: Contact Resistance
30 milliohms MAX
- 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 绝缘电阻: Insulation Resistance:
1000MEGA ohms MIN

物理性能 Mechanical:

- 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf (MAX)
Unmate force: 1.02kgf (MIN)
- 端子保持力: Terminal Retention
0.5kgf (MIN)

原材料 Material:

- 塑胶 Housing:
Hing Temperature Thermoplastics,
UL 94V-0 PBT
- 端子 Contact: Copper Alloy C2680
- 外壳 Shell: Copper Alloy C2680/SPCC





电镀 Finish:

- 端子 Contact: Plated Gold in Mating Area;
Tin On Solder Tails
- 外壳 Shell:
Nickel Plating

PART NO. INFORMATION

U04-A F X X X T - 022 - V2

PORT TYPE A: TYPE A	PACKAGE T: TRAY
GENDER F: FEMALE M: MALE	HOUSING COLOR 1: RED 5: BLACK 2: WHITE 3: GREEN 9: NATURE
CONTACT PLATED 1: GOLD FLASH 2: GOLD 3U" 3: GOLD 5U" 4: GOLD 10U" 5: GOLD 15U" 6: GOLD 30U"	HOUSING MATERIAL A: LCP B: PBT C: PA9T D: PA6T E: PA46 F: PA66

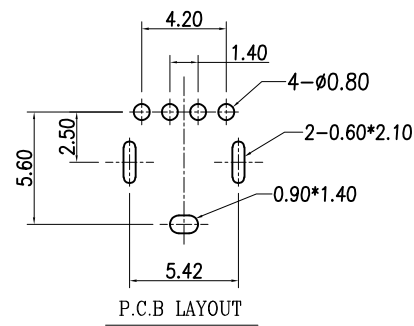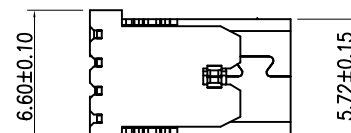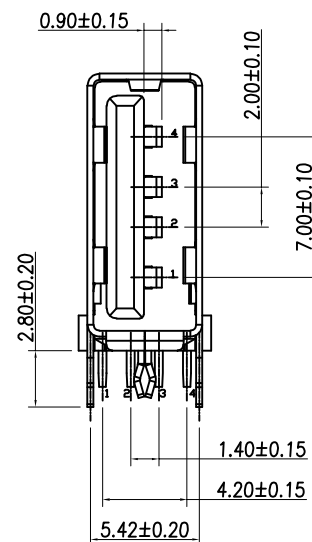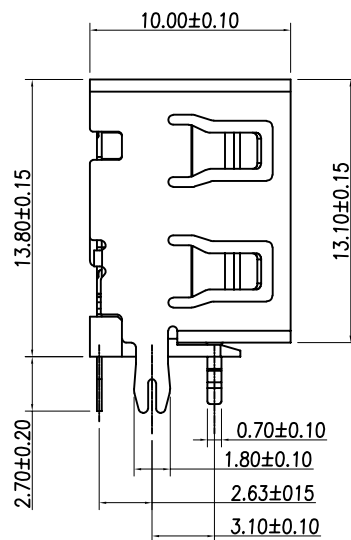

P.C.B LAYOUT

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.20	X."	± 3"
.X	± 0.10	.X"	± 2"
.XX	± 0.05	.XX"	± 1"

Website: www.bsc-elec.com

Email: bestcreate@bsc-elec.com

DESIGN:

DATE:

I. L

2017. 3. 1

CHECKED:

DATE:

C. W

2017. 3. 1

APPROVED:

DATE:

C. W

2017. 3. 1

TITLE:

UPRIGHT USB 2.0 A/F CONNECTOR DIP TYPE, L=10.0MM

MATERIAL:

PART NO:
U06-AFXXXXT-022-V2

SIZE:
A4

FINISH:

DWG NO:
U06-AFXXXXT-022-V2

REV:
A

UNIT
mm

SCALE
1=1

QUALITY
SYMBOLS

