
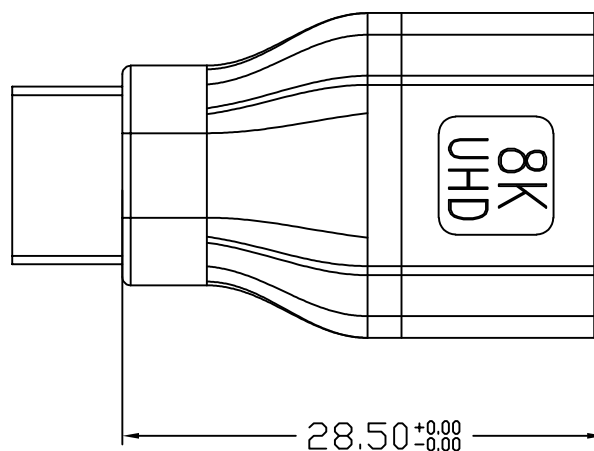
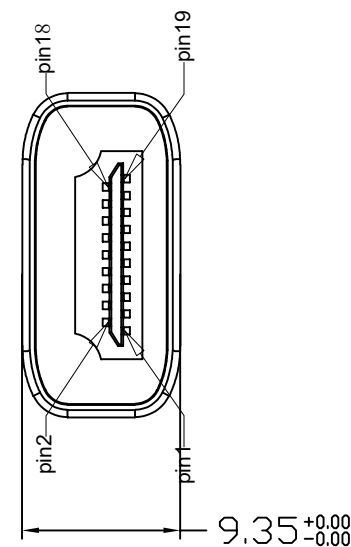
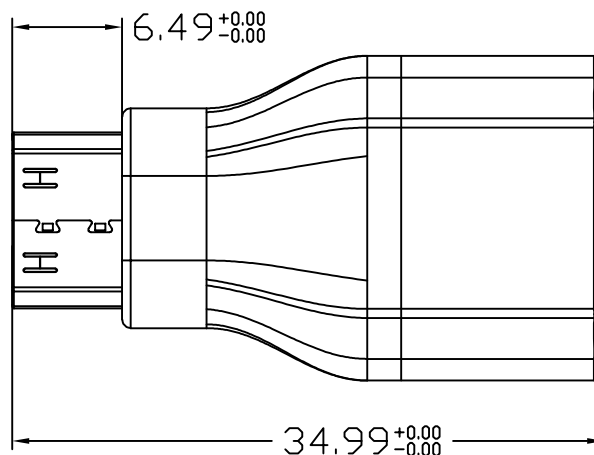


RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

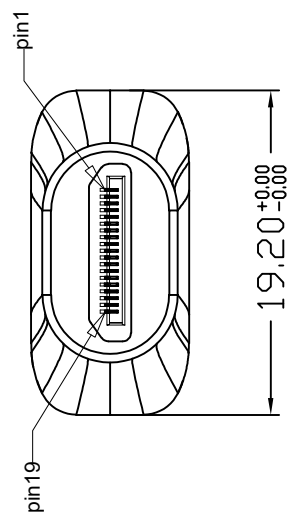

PS:

- 100% SHORT/OPEN CIRCUIT TEST CONDITION;
- CONDUCTOR RESISTANCE $\leq 5 \Omega$, INSULATION RESISANCE $\geq 10M \Omega$.
HIGH VOLTAGE TESTDC 300V/10mS.
- USE PCB FOR CONNECTION, APPROVED 2.1V TECHNOLOGY STANDARD ,8k60HZ.

4	OUTER MOULD	PVC SIZING MATERIAL 30P BLACK+ALUMINIUM ALLOY		
3	INSIDE CONNECTION	PCB T=1.6MM		
2	CONNECTOR	HDMI MINI C(M) SPCC SHELL WITH GOLD PLATED PIN WITH GOLD	DT03003	1PCS
1	CONNECTOR	HDMI 19P A(F) SPCC SHELL WITH GOLD PLATED PIN WITH GOLD	DT01007	1PCS
NO	NAME	MATERIAL	PART NUMBER	QTY

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	±	0.50	X.'	±	5'
.X	±	0.30	.X'	±	2'
.XX	±	0.10	.XX'	±	1'

Website: www.bsc-elec.com
Email: bestcreate@bsc-elec.com

DESIGN: I.L. DATE: 2017.3.1
CHECKED: DATE: 2017.3.1
C.W
APPROVED: DATE: 2017.3.1
C.W

TITLE: HDMI AF TO HDMI C MALE ADAPTER

MATERILA: PART NO: HDAFCM-002 SIZE: A4
FINSH: DWG NO: HDAFCM-002

REV: A UNIT mm SCALE 1=1 QUALITY SYMBOLS