


RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

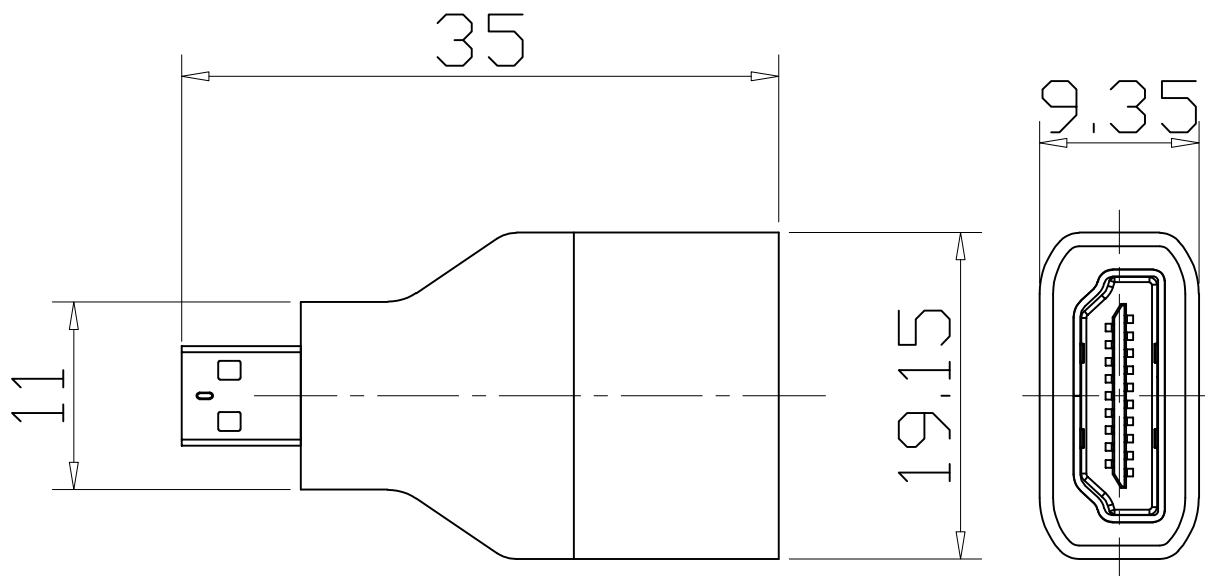

NOTES:

1.MATERIAL:

- 1-1. INSERTMOLDING: LCP, COLOR:BACK,UL94-V0.
- 1-2. CONTACT: C2680(T=0.20mm) ;
GOLD FLASH ON CONTACT AREA,
100u" Min. Tin PLATED ON SOLDER TAILS.
50u" Min. NICKEL PLATED OVERALL.
- 1-3. SHELL: SPCC,(T=0.50mm) ;GOLD FLASH PLATED OVERALL.
100u" Min. NICKEL BOTTOM PLATED OVERALL.
120u" Min. COPPER BOTTOM PLATED OVERALL.

2.ELECTRICAL CHARACTERISTICS:

- 2-1. CURRENT RATING: 0.5A
- 2-2. CONTACT RESISTANCE: 30mΩ MAX.
- 2-3. INSULATION RESISTANCE: 100MΩ MIN.
- 2-4. DIELECTRIC WITHSTAND VOLTAGE: AC 500V/MINUTE.
- 2-5. OPERATING TEMPERATURE RANGE: -25°C~+85°C

3.MECHANICAL CHARACTERISTICS:

- 3-1. INSERTION FORCE: 4.5Kgf MAX.
- 3-2. EXTRACTION FORCE: 1.0Kgf MIN.,4.0Kgf MAX.

4.DURABILITY: 10000 CYCLES.

5.SALT FOG TEST:24H.

6."⊗" SHOWS FAI MEASURMENT POINT.

7. MARKED"▽"AS KEY CONTROL SIZE.

Bestcreate Technology Limited

REV: A UNIT mm SCALE 1=1 QUALITY SYMBOLS

TOLERANCES UNLESS OTHERWISE SPECIFIED:			
X.	±	0.50	X.' ± 5'
.X	±	0.30	.X' ± 2'
.XX	±	0.10	.XX' ± 1'
Website:www.bsc-elec.com			
Email:bestcreate@bsc-elec.com			

DESIGN:	DATE:
I.L	2017.3.1
CHECKED:	DATE:
C.W	2017.3.1
APPROVED:	DATE:
C.W	2017.3.1

TITLE:		
HDMI AF TO HDMI D MINI MALE ADAPTER		
MATERILA:	PART NO:	SIZE:
	HDAFMDM-001	A4
FINSH:	DWG NO:	
	HDAFMDM-001	