
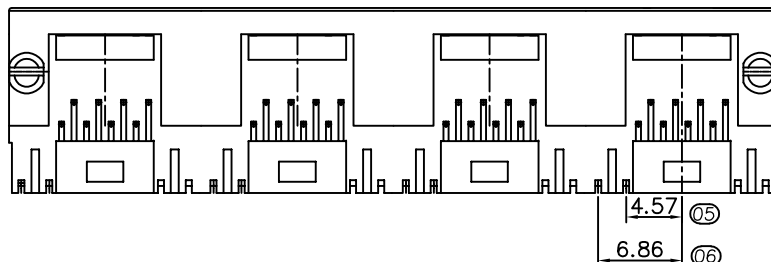

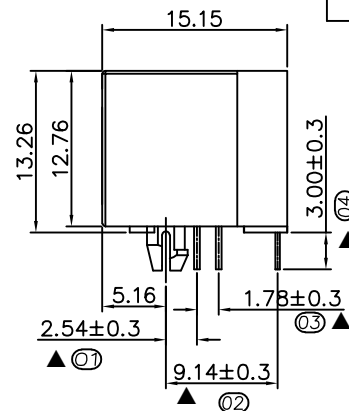


RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

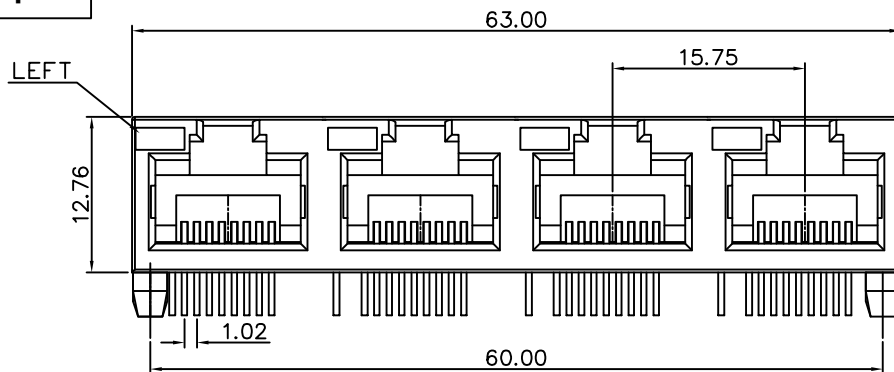

NOTES

MATERIAL

1. HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
3. PLATING : GOLD FLASH PLATING OVER NICKEL.

ELECTRICAL


1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 40 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 100V DC .
5. DIELECTRIC DIELECTRIC RESISTANCE : 500V DC RMS 50Hz. 1MIN.

MECHANICAL

1. DURRABILITY : 750 CYCLES MIN.
2. MATING/UNMATING FORCE : 2.24 KG.F MAX.

ENVIRONMENTAL:

1. STORAGE : -40°C ~ +85°C.
2. OPERATION : -40°C ~ +85°C.

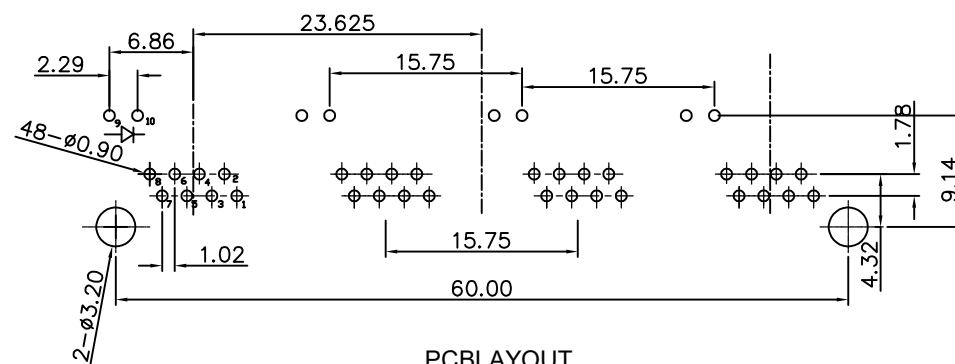

PCBLAYOUT
TOL:±0.05

PART NO. INFORMATION

RJ01- X 1 B X - 129

CONTACT PLATED

- 1: G/F 2: AU 3U"
3: AU 6U" 4: AU 10U"
5: AU 15U" 6: AU 30U"

- PACKAGE
R: TAPE REEL
T: TRAY

LED COLOR:

- 1:L-GREEN

- HOUSING:
A:PBT YELLOW
B:PBT BLACK

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	± 0.35	X'	± 3'
.XX	± 0.25	.X'	± 2'
.XXX	± 0.15	.XX'	± 1'

Website:www.bsc-elec.com

Email:bestcreate@bsc-elec.com

DESIGN:

I. L

CHECKED:

C. W

APPROVED:

C. W

DATE:

2017. 3. 1

DATE:

2017. 3. 1

DATE:

2017. 3. 1

TITLE:

5623 1X4 RJ45 FEMALE CONNECTOR WITH LED IN LEFT SIDE

MATERILA:

FINSH:

PART NO:

RJ01-X1BX-129

DWG NO:

RJ01-X1BX-129

SIZE:

A4

1 OF 2

REV:


A

UNIT

mm

SCALE

1=1

QUALITY
SYMBOLS

1

2

3

4

5

6

7

8