

RoHS Compliant

MATERIAL

HOUSING : THERMO PLASTIC UL94V-0 BLACK

CONTACT : COPPER ALLOY

PEG : COPPER ALLOY

SPECIFICATION

CURRENT RATING : 0.5A 50V AC/DC





CONTACT RESISTANCE : 55 mΩ

INSULATION RESISTANCE : 500 MΩ MIN AT 500V DC

OPERATING TEMPERATURE : -55°C~80°C

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

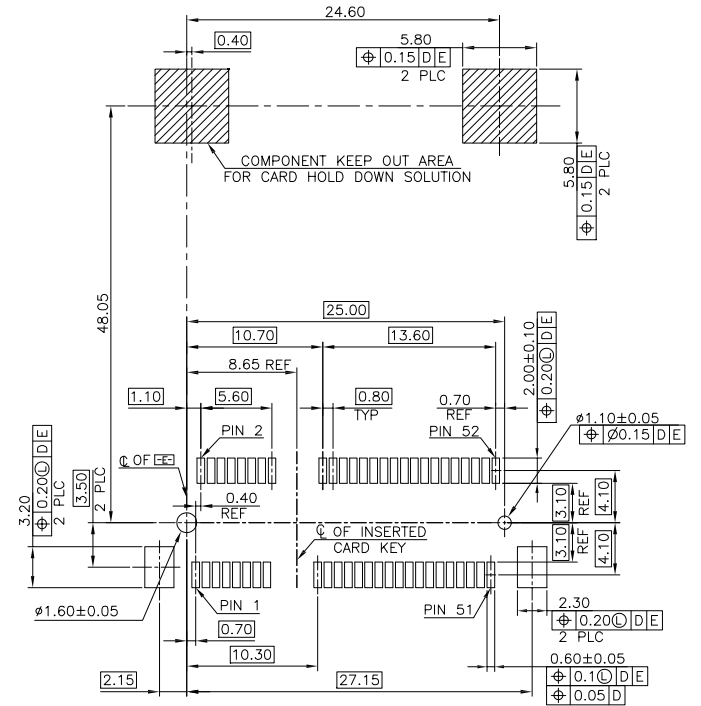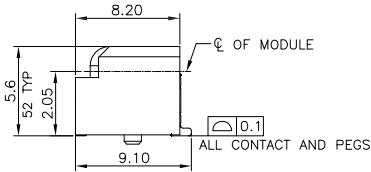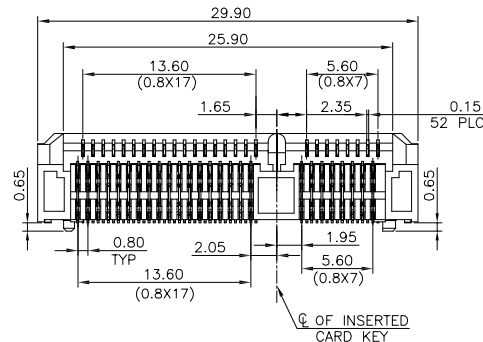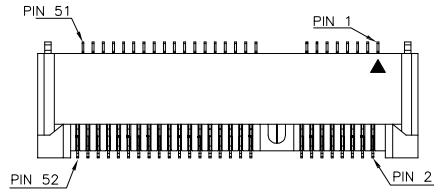

-D- IS THE TOP SURFACE OF PCB.

RECOMMENDED P.C. BOARD PATTERN LAYOUT

PART NO. INFORMATION

MNPCI - F X A 5 R -006


GENDER
F: FEMALE
M: MALE

PACKAGE
R: TAPE REEL

HOUSING COLOR
5: BLACK

HOUSING MATERIAL
A: LCP

CONTACT PLATED
1: NO PLATING
2: GOLD FLASH 1~3U" OVER NI
50~100U"
3: CONTACT AREA AND SOLDER AREA:
SELECTION GOLD 1U" OVER NI
50~100U"

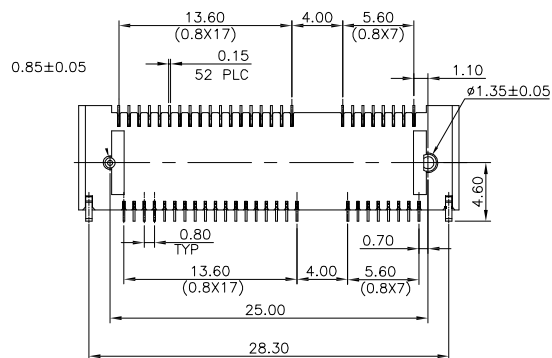

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	± 0.30	X.	± 7°
.XX	± 0.20	.X.	± 4°
.XXX	± 0.15	.XX.	± 3°

Website: www.bsc-elec.com

E-mail: bestcreate@bsc-elec.com

DESIGN:

I. L

DATE:

2017. 3. 1

CHECKED:

C. W

DATE:

2017. 3. 1

APPROVED:

C. W

DATE:

2017. 3. 1

TITLE:

0.8PITCH MINI PCI EXPRESS HIGH=5.6MM 52P CONNECTOR

MATERIAL:

FINISH:

PART NO:

DWG NO:

SIZE:


SHEET:

REV: A

UNIT mm

SCALE 1=1

QUALITY SYMBOLS



1

2

3

4

5

6

7

8