


RoHS Compliant

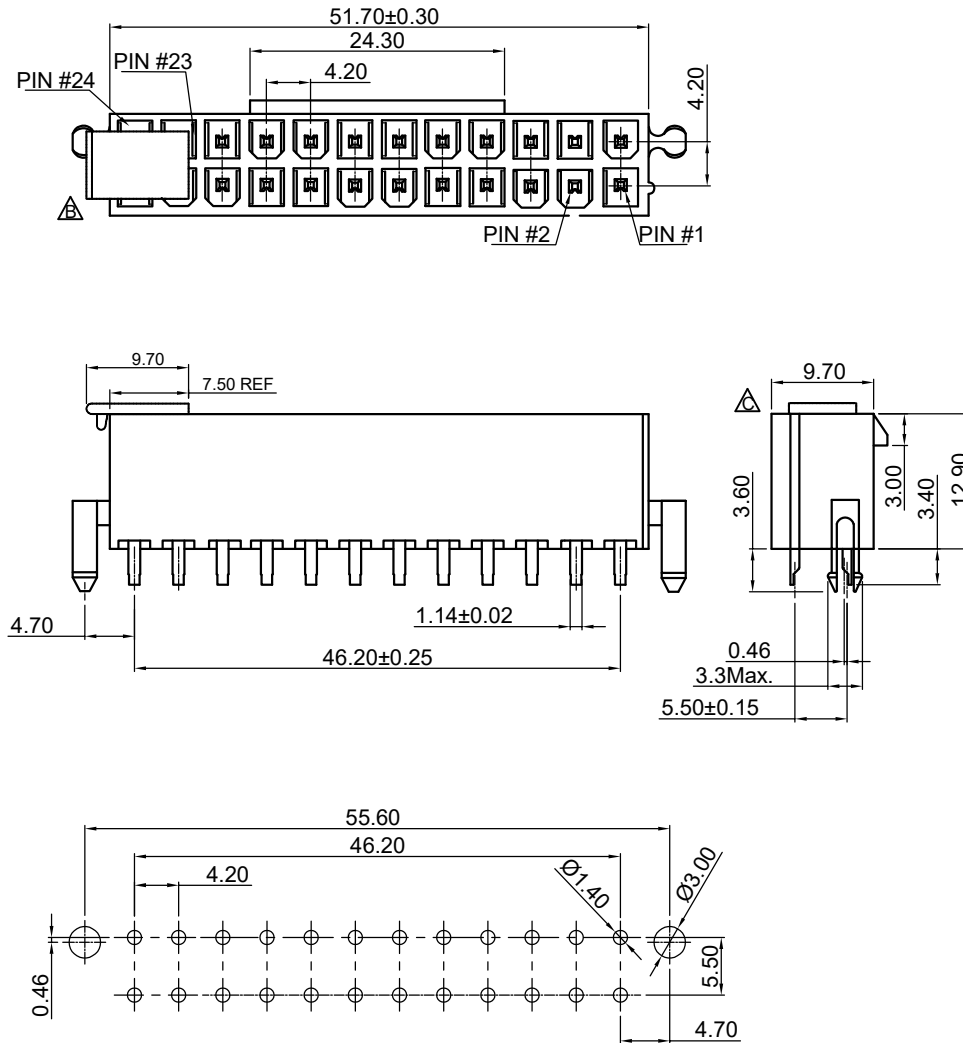

RECOMMENDED P.C.B LAYOUT
TOLERANCE: ±0.05 (TOP VIEW)

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

NOTE

1.SPECIFICATIONS

- 1.1 VOLTAGE RATING: 250V DC/AC
- 1.2 CURRENT RATING: 8A DC/AC
- 1.3 CONTACT RESISTANCE: 20mΩ MAX
- 1.4 INSULATION RESISTANCE: 1000MΩ MIN
- 1.5 WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
- 1.6 TEMPERATURE RANGE:-55°C ~ +85°C

2.MATERIAL

- 2.1 HOUSING:THERMOPLASTIC,UL 94V-0
- 2.2 CONTACT:BRASS
- 2.3 FINISH:SEE ORDERING INFORMATION

PART NO. INFORMATION

PW24 - M X D X X - 0001 - X

GENDER
F: FEMALE
M: MALE

CONTACT PLATED

- 1: GOLD FLASH
- 2: GOLD 3U"
- 3: GOLD 5U"
- 4: GOLD 10U"
- 5: GOLD 15U"
- 6: GOLD 30U"

PACKAGE
T: TRAY
R:TAPE REEL

HOUSING COLOR
2: WHITE
5: BLACK
9: NATURE

HOUSING MATERIAL
A: PA66

- 1:WITH CAP
- 2:WITHOUT CAP

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.30	X.'	± 3'
.X	± 0.20	.X'	± 2'
.XX	± 0.15	.XX'	± 1'

Website: www.bsc-elec.com

E-mail: bestcreate@bsc-elec.com

DESIGN:
I. L

DATE:
2017. 3. 1

CHECKED:
C. W

DATE:
2017. 3. 1

APPROVED:
C. W

DATE:
2017. 3. 1

TITLE:

ATX 24P 4.2MM 180° DIP TYPE POWER CONNECTOR

MATERILA:

PART NO:

PW24-MXDXX-0001-X

SIZE:
A4

FINSH:

DWG NO:





PW24-MXDXX-0001-X

SHEET:
1 OF 2

RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

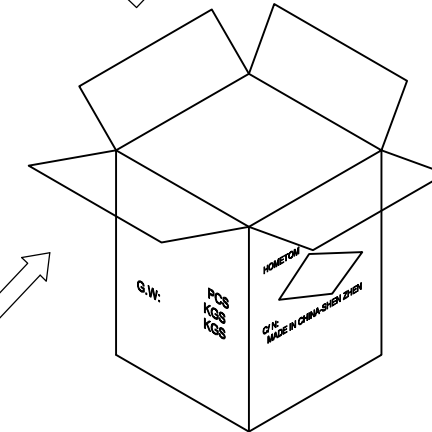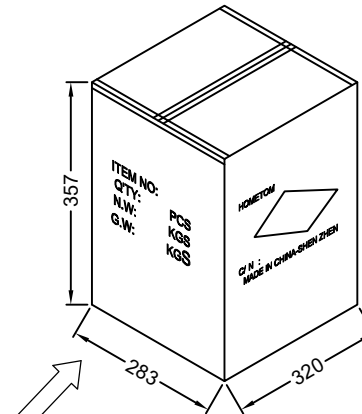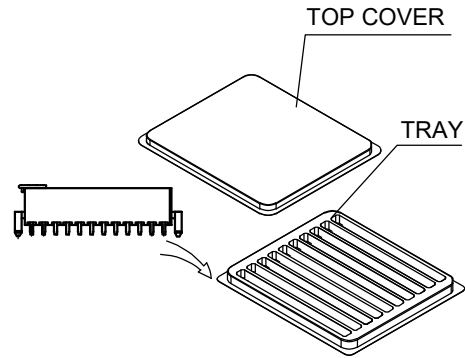

NOTE :
1.DIMENSION :
CARTON:L=320mm, W=283mm, H=357mm
TRAY:L=312mm, W=271mm, H=12mm
2.QUANTITY:
40 PCS/ PE BAG
25 TRAY/ CARTON
1000 PCS/ CARTON

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.30	X.*	± 3°
.X	± 0.20	.X.*	± 2°
.XX	± 0.15	.XX.*	± 1°

Website: www.bsc-elec.com
E-mail: bestcreate@bsc-elec.com

DESIGN: I. L DATE: 2017. 3. 1

CHECKED: C. W DATE: 2017. 3. 1

APPROVED: C. W DATE: 2017. 3. 1

TITLE: ATX 24P 4.2MM 180° DIP TYPE POWER CONNECTOR

MATERILA:	PART NO: PW24-MXDXX-0001-X	SIZE: A4
FINSH:	DWG NO: PW24-MXDXX-0001-X	SHEET: 2 OF 2