

RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

NOTES:

ELECTRICAL SPECIFICATION

OPERATION VOLTAGE:100V AC MAX.

CURRENT RATING:1.5 AMPERE PER CONTACT.

CONTACT RESISTANCE: 30mΩ Max.

DIELECTRIC WITHSTANDING VOLTAGE:500V AC.

ENVIRONMENTAL

OPERATING TEMPERATURE:-50℃ TO +125℃.

MATERIAL







HOUSING: THERMOPLASTIC, UL 94V-0

COVER:THERMOPLASTIC, UL 94V-0

CONTACT: COPPER.

PLATING: GOLD PLATING OVER NICKEL ON CONTACT AREA, TIN

PLATING ON SOLDER TAIL.

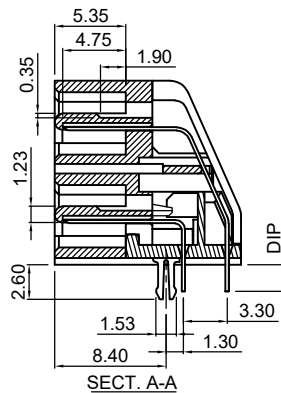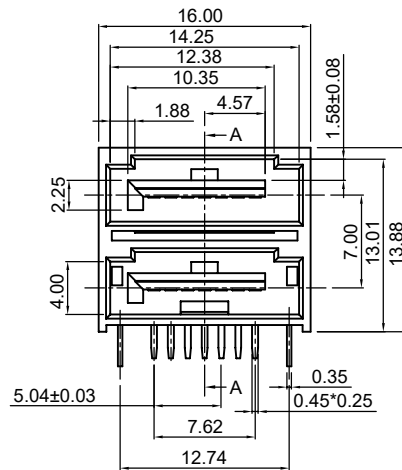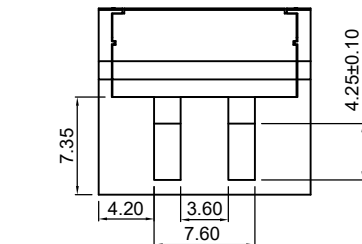

PART NO. INFORMATION

S140 - M X B X T - 001 - X

GENDER
F: FEMALE
M: MALE

CONTACT PLATED
1: GOLD FLASH
2: 15U" GOLD

DIP
B:1.60
D:2.0

PACKAGE
T: TRAY
R:TAPE REEL

HOUSING COLOR
1:WHITE 2:BLUE
3:ORANGE 4:GRAY
5:BLACK 6:RED
7:YELLOW 8:ORANGE

HOUSING MATERIAL
B: PA66

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.30	X.*	± 2"
.X	± 0.25	.X*	± 1"
.XX	± 0.20	.XX*	± 0.5"

Website: www.bsc-elec.com

E-mail: bestcreate@bsc-elec.com

DESIGN:
I. L

DATE:
2017. 3. 1

CHECKED:
C. W

DATE:
2017. 3. 1

APPROVED:
C. W

DATE:
2017. 3. 1

TITLE:

DUAL SATA 14P MALE CONNECTOR 1.27MM R/A

MATERIAL:

PART NO:

S140-MXBT-001-X

SIZE:

A4

FINISH:

DWG NO:

S140-MXBT-001-X

SHEET:

1 OF 2

REV:
A

UNIT
mm

SCALE
1=1


QUALITY
SYMBOLS



RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

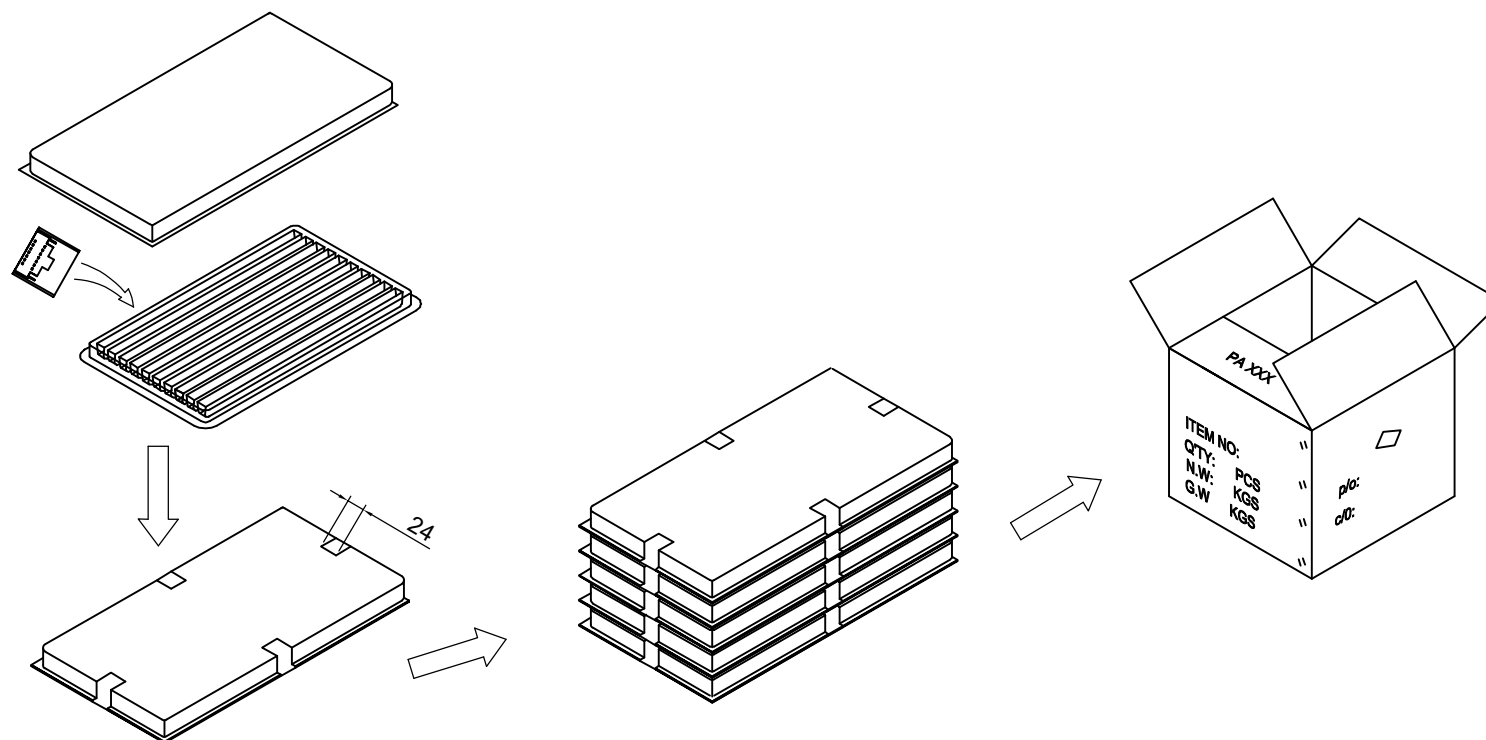

NOTE :
1.DIMENSION :
CARTON:
L=320mm, W=283mm, H=357mm
2.QUANTITY:
200 PCS/ TRAY
20 TRAY/ CARTON
4000 PCS/ CARTON

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.30	X.*	± 2°
.X	± 0.25	.X*	± 1°
.XX	± 0.20	.XX*	± 0.5°

Website: www.bsc-elec.com

E-mail: bestcreate@bsc-elec.com

DESIGN:
I. L

DATE:
2017. 3. 1

CHECKED:
C. W

DATE:
2017. 3. 1

APPROVED:
C. W

DATE:
2017. 3. 1

TITLE:

DUAL SATA 14P MALE CONNECTOR 1.27MM R/A

MATERILA:

PART NO:

S140-MXBXT-001-X

SIZE:
A4

FINSH:

DWG NO:

S140-MXBXT-001-X

SHEET:
2 OF 2

REV:
A

UNIT
mm

SCALE
1=1

QUALITY
SYMBOLS

