

RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

NOTE:

- 1.CURRENT RATING: 1.5A
- 2.CONTACT RESISTANCE: 30mΩ MAX
- 3.INSULATION RESISTANCE:1000MΩ Min
- 4.WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
- 5.TEMPERATRUE RANGE:-55°C - +85°C

MATERIAL:

- 1.HOUSING: THERMOPLASTIC UL 94V-0.
- 2.CONTACTS: BRASS
- 3.PLATING:
CONTACT:50u" MIN NICKEL UNDER PLATING OVER ALL
100u" MIN TIN PLATING ON THE TAIL.
GOLD PLATING ON CONTACT AREA
HOOK: 100u" MIN MATTE TIN PLATING
UNDER 50u" MIN NICKEL OVER ALL

PART NO. INFORMATION

S700 - M X X X T -011

GENDER:
F: FEMALE
M: MALE

CONTACT PLATED
1: GOLD FLASH
2: 15U" GOLD

PACKAGE
T: TRAY
R:TAPE REEL

HOUSING COLOR
1: GREY 2: BLUE
3: BLACK 4: YELLOW
5: WHITE 6:RED

HOUSING MATERIAL
A: PA9T
B: PA66

P.C.B LAYOUT(TOP VIEW)
TOLERANCE:±0.05

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.30	X.*	± 2°
.X	± 0.25	.X*	± 1°
.XX	± 0.20	.XX*	± 0.5°

Website: www.bsc-elec.com

E-mail: bestcreate@bsc-elec.com

DESIGN:

I. L

DATE:

2017. 3. 1

CHECKED:

C. W

DATE:

2017. 3. 1

APPROVED:

C. W

DATE:

2017. 3. 1

TITLE:

SATA 7P MALE CONNECTOR DIP TYPE 180°

MATERILA:

FINSH:

PART NO:

S700-MXXXT-011

DWG NO:

S700-MXXXT-011

SIZE:

A4

SHEET:

1 OF 1

REV:

A

UNIT


mm


SCALE

1=1

QUALITY

SYMBOLS



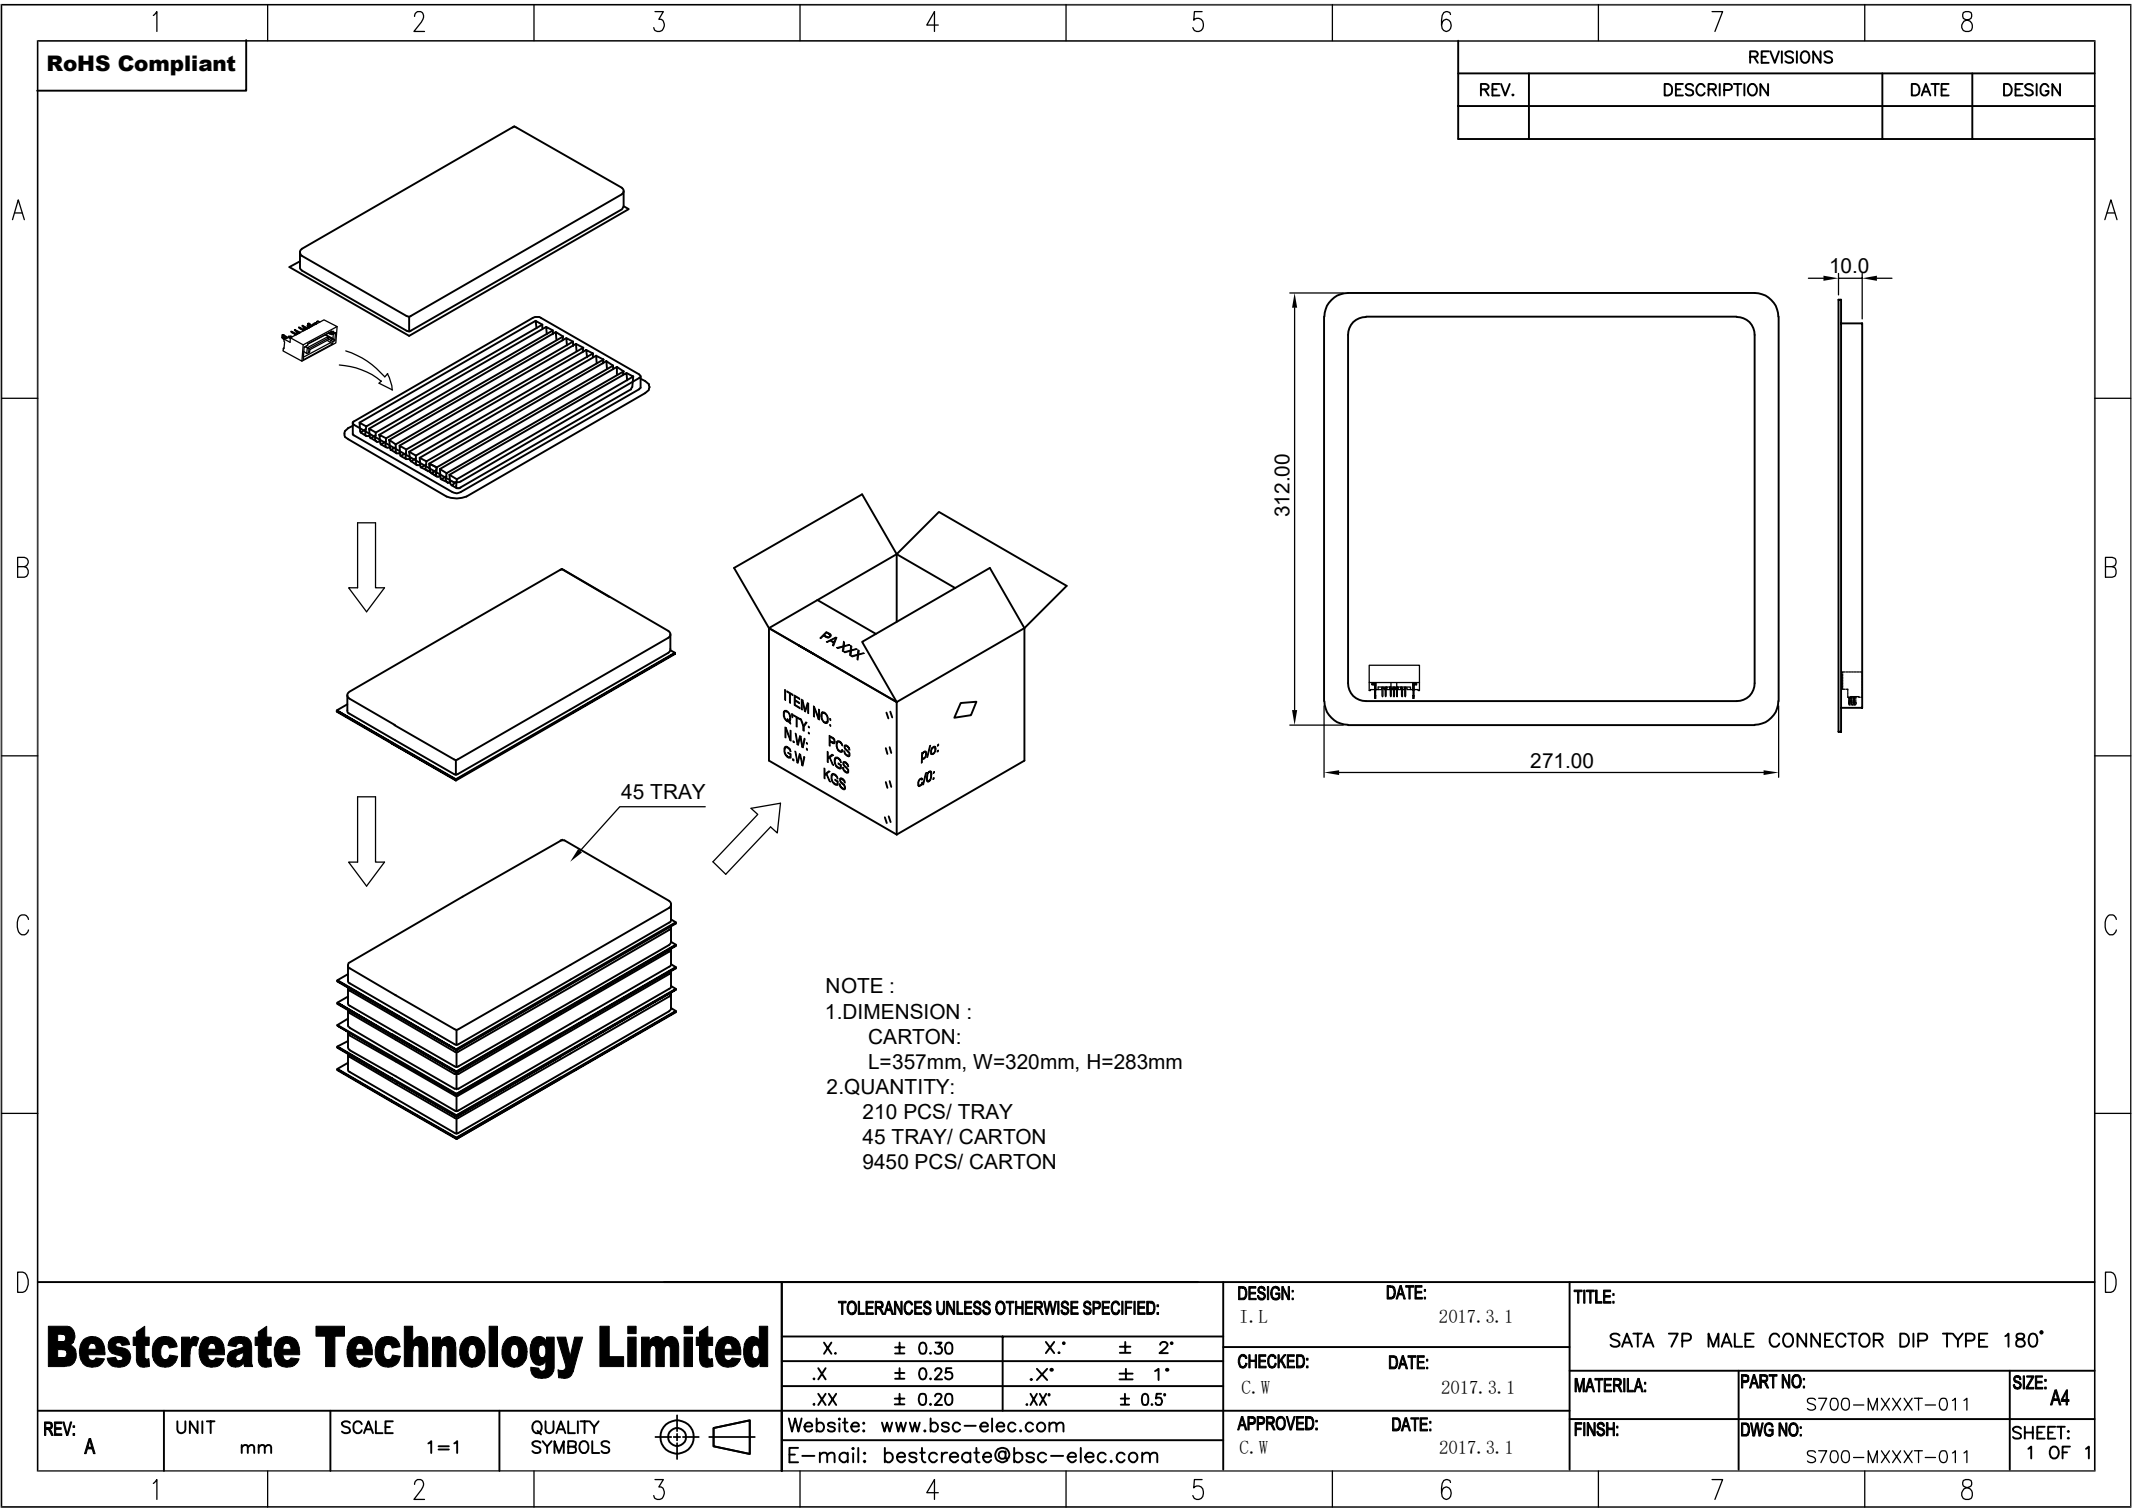

RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

NOTE :
1.DIMENSION :
CARTON:
L=357mm, W=320mm, H=283mm
2.QUANTITY:
210 PCS/ TRAY
45 TRAY/ CARTON
9450 PCS/ CARTON

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:			
X.	± 0.30	X.*	± 2°
.X	± 0.25	.X*	± 1°
.XX	± 0.20	.XX*	± 0.5°
Website: www.bsc-elec.com			
E-mail: bestcreate@bsc-elec.com			

DESIGN:	DATE:
I. L	2017. 3. 1
CHECKED:	DATE:
C. W	2017. 3. 1
APPROVED:	DATE:
C. W	2017. 3. 1

TITLE:		
SATA 7P MALE CONNECTOR DIP TYPE 180°		
MATERILA:	PART NO:	SIZE:
	S700-MXXXT-011	A4
FINSH:	DWG NO:	SHEET:
	S700-MXXXT-011	1 OF 1

REV:	UNIT	SCALE	QUALITY
A	mm	1=1	SYMBOLS

