

RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗:Contact Resistance
30 milliohms MAX
4. 耐电压:Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force:3.57kgf (MAX)
Unmate force:1.02kgf (MIN)
2. 端子保持力: Terminal Retention
1.2kgf (MIN)

原材料:Material:

1. 塑胶:Housing:
Hing Temperature Tnermaplastics,
U1 94V-0 LCP Black
2. 端子>Contact:Copper Alloy C2680
3. 外壳:Shell: SPCC


电镀:Finish:

1. 端子>Contact: Plated Gold in Mating Area;
Tin On Solder Tails
2. 外壳:Shell:
Nickel Plating

PART NO. INFORMATION

U04-A F X X X R - 025 - V2

PORT TYPE A: TYPE A	PACKAGE T: TRAY	HOUSING COLOR 1: RED 5: BLACK 2: WHITE 3: GREEN 9: NATURE
GENDER F: FEMALE M: MALE	CONTACT PLATED 1: GOLD FLASH 2: GOLD 3U" 3: GOLD 5U" 4: GOLD 10U" 5: GOLD 15U" 6: GOLD 30U"	HOUSING MATERIAL A: LCP B: PBT C: PA9T D: PA6T E: PA46 F: PA66

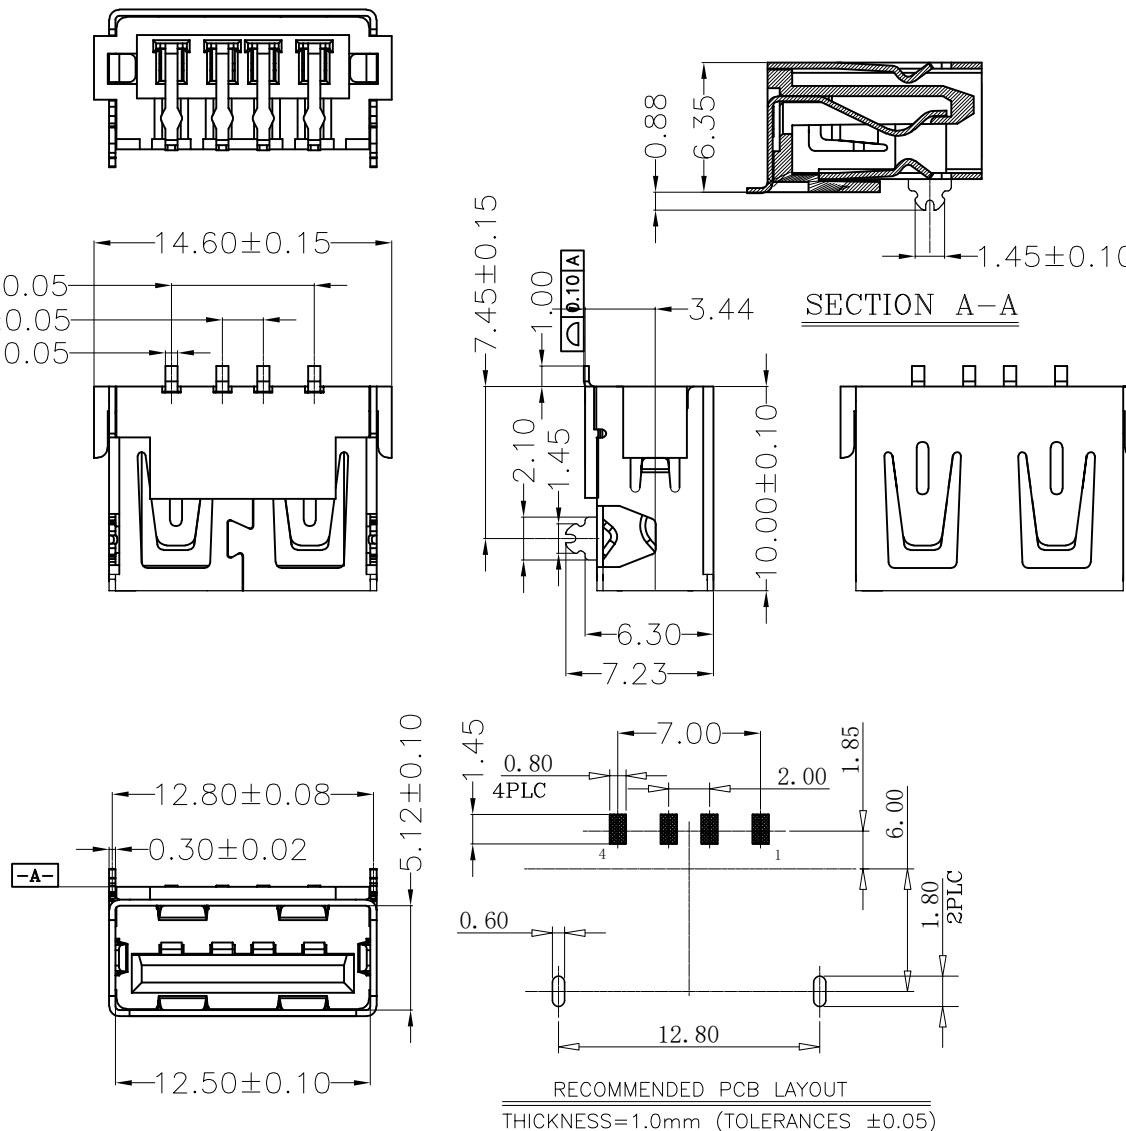

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	±	0.50	X.	±	2°
.X	±	0.38	.X	±	1°
.XX	±	0.25	.XX	±	0.5°

Website:www.bsc-elec.com

Email:bestcreate@bsc-elec.com

DESIGN: DATE:

I. L. 2017. 3. 1

CHECKED: DATE:

C. W. 2017. 3. 1

APPROVED: DATE:

C. W. 2017. 3. 1

TITLE:

USB 2.0 A/F CONNECTOR SMT TYPE, L=10.0

MATERIAL:

FINISH:

PART NO:

DWG NO:

SIZE:

A4

REV:

A

UNIT

mm

SCALE

1=1

QUALITY

SYMBOLS

