

RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.0A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗:Contact Resistance
50 milliohms MAX
4. 耐电压:Dielectnrc Withstanding Voitage:
300 V AC AT Sea Levot
5. 绝缘阻抗:Lnsulation Resistance:
100MEGA ohms MIN


物理性能:Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force:3.0kgf (MAX)
Unmate force:0.7kgf (MIN)
2. 端子保持力: Terminal Retenion
0.5kgf (MIN)






原材料:Matarial:

1. 塑胶:Housing:
Hing Temperature Tnermaplastics,
UL 94V-0 LCP Black
 2. 端子:Contact:Copper Alloy C5191
 3. 外壳:Shell: Copper Alloy C2680
1. 端子:Contact: Piated Gold in Mating Area:
Tin On Solder Talls
 2. 外壳:Shell:
Nickel Plating

备注: 此(△)符号为变更尺寸, 符号里的数字表示变更的次数/版次。

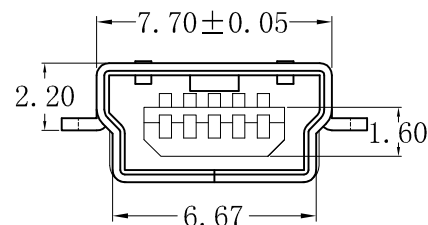

小弹片

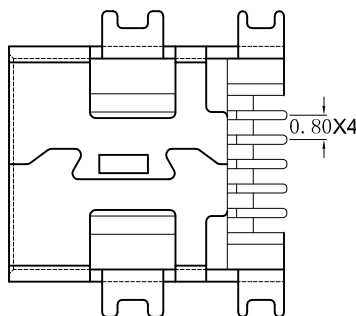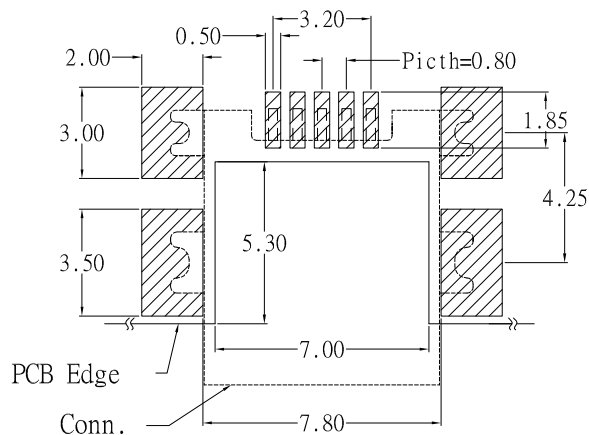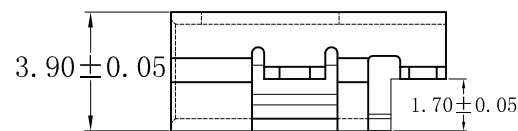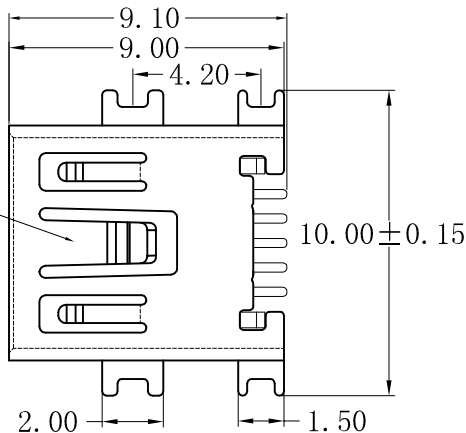

P.C.B LAYOUT

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	±	0.50	X.*	±	3"
.X	±	0.25	.X*	±	2"
.XX	±	0.15	.XX*	±	1"

Website:www.bsc-elec.com

Email:bestcreate@bsc-elec.com

DESIGN: I. L. DATE: 2017. 3. 1

CHECKED: C. W. DATE: 2017. 3. 1

APPROVED: C. W. DATE: 2017. 3. 1

TITLE: MINI USB 5P/F SMT B TYPE, MID-MOUNT 1.7mm

MATERIAL:	PART NO: U05-BFXX5X-016	SIZE: A4
FINISH:	DWG NO: U05-BFXX5X-016	

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------