

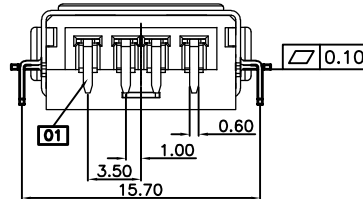





RoHS Compliant



COLOR	HOUSING	HOUSING P/N	P/N
BLACK	PA9T	S-36120049	U02-AFXX5T-010
WHITE	LCP	S-16110048	U02-AFXX5T-010

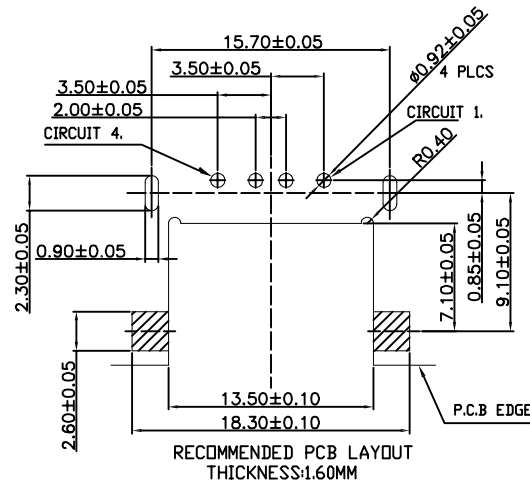

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

NOTE:

1. 特性(characteristics):

1.1额定电流: 2.5A at 30V AC MAX.

Rating Current :2.5A at 30V AC MAX.

1.2接触阻抗: 30mΩ MAX.

Contact Resistance:30 MEGA OHMS MAX.

1.3绝缘阻抗: 1000 MEGA OHMS MIN.

Insulation Resistance:1000 MEGA OHMS MIN.

1.4耐电压: 500V AC/minute.

Withstanding Voltage:500V AC/minute.

1.5插入力: 3.50Kgf MAX

Mating force:3.50Kgf MAX

1.6拔出力: 1.0Kgf Min.

Extraction force:1.0Kgf Min.

1.7耐久性: 3000cycles Min:200cycles/Hour:

Durability:3000cycles Min:200 cycles/Hour:

PART NO. INFORMATION

U02-A F X X 5 T - 010			
GENDER F: FEMALE M: MALE	PORT TYPE A: TYPE A	CONTACT PLATED 1: GOLD FLASH 2: GOLD 3U" 3: GOLD 6U" 4: GOLD 10U" 5: GOLD 15U" 6: GOLD 30U"	PACKAGE T: TRAY R: TAPE&REEL
			HOUSING COLOR 2: WHITE 5: BLACK 9: NATURE
		HOUSING MATERIAL A: LCP B: PBT C: PA9T D: PA6T E: PA46 F: PA66	

ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS
03	HOUSING	SEE NOTE1	ROHS UL94V-0	见说明1
02	SHELL	C2680	Ni 50u"Min	T-1010422
01	CONTACT	C5191R	Ni 50u"Min Au 5u"Min Sn 80u"Min	D-1010424

Bestcreate Technology Limited

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------

TOLERANCES UNLESS OTHERWISE SPECIFIED:			
X.	± 0.50	X."	± 3'
.X	± 0.25	.X"	± 2'
.XX	± 0.15	.XX"	± 1'
Website:www.bsc-elec.com			
Email:bestcreate@bsc-elec.com			

DESIGN: I. L	DATE: 2017. 3. 1	TITLE: USB A/F CONNECTOR WITH FLANGE	
CHECKED: C. W	DATE: 2017. 3. 1		
APPROVED: C. W	DATE: 2017. 3. 1	MATERIAL: A	PART NO: U02-AFXX5T-010
		FINISH: A	DWG NO: U02-AFXX5T-010