


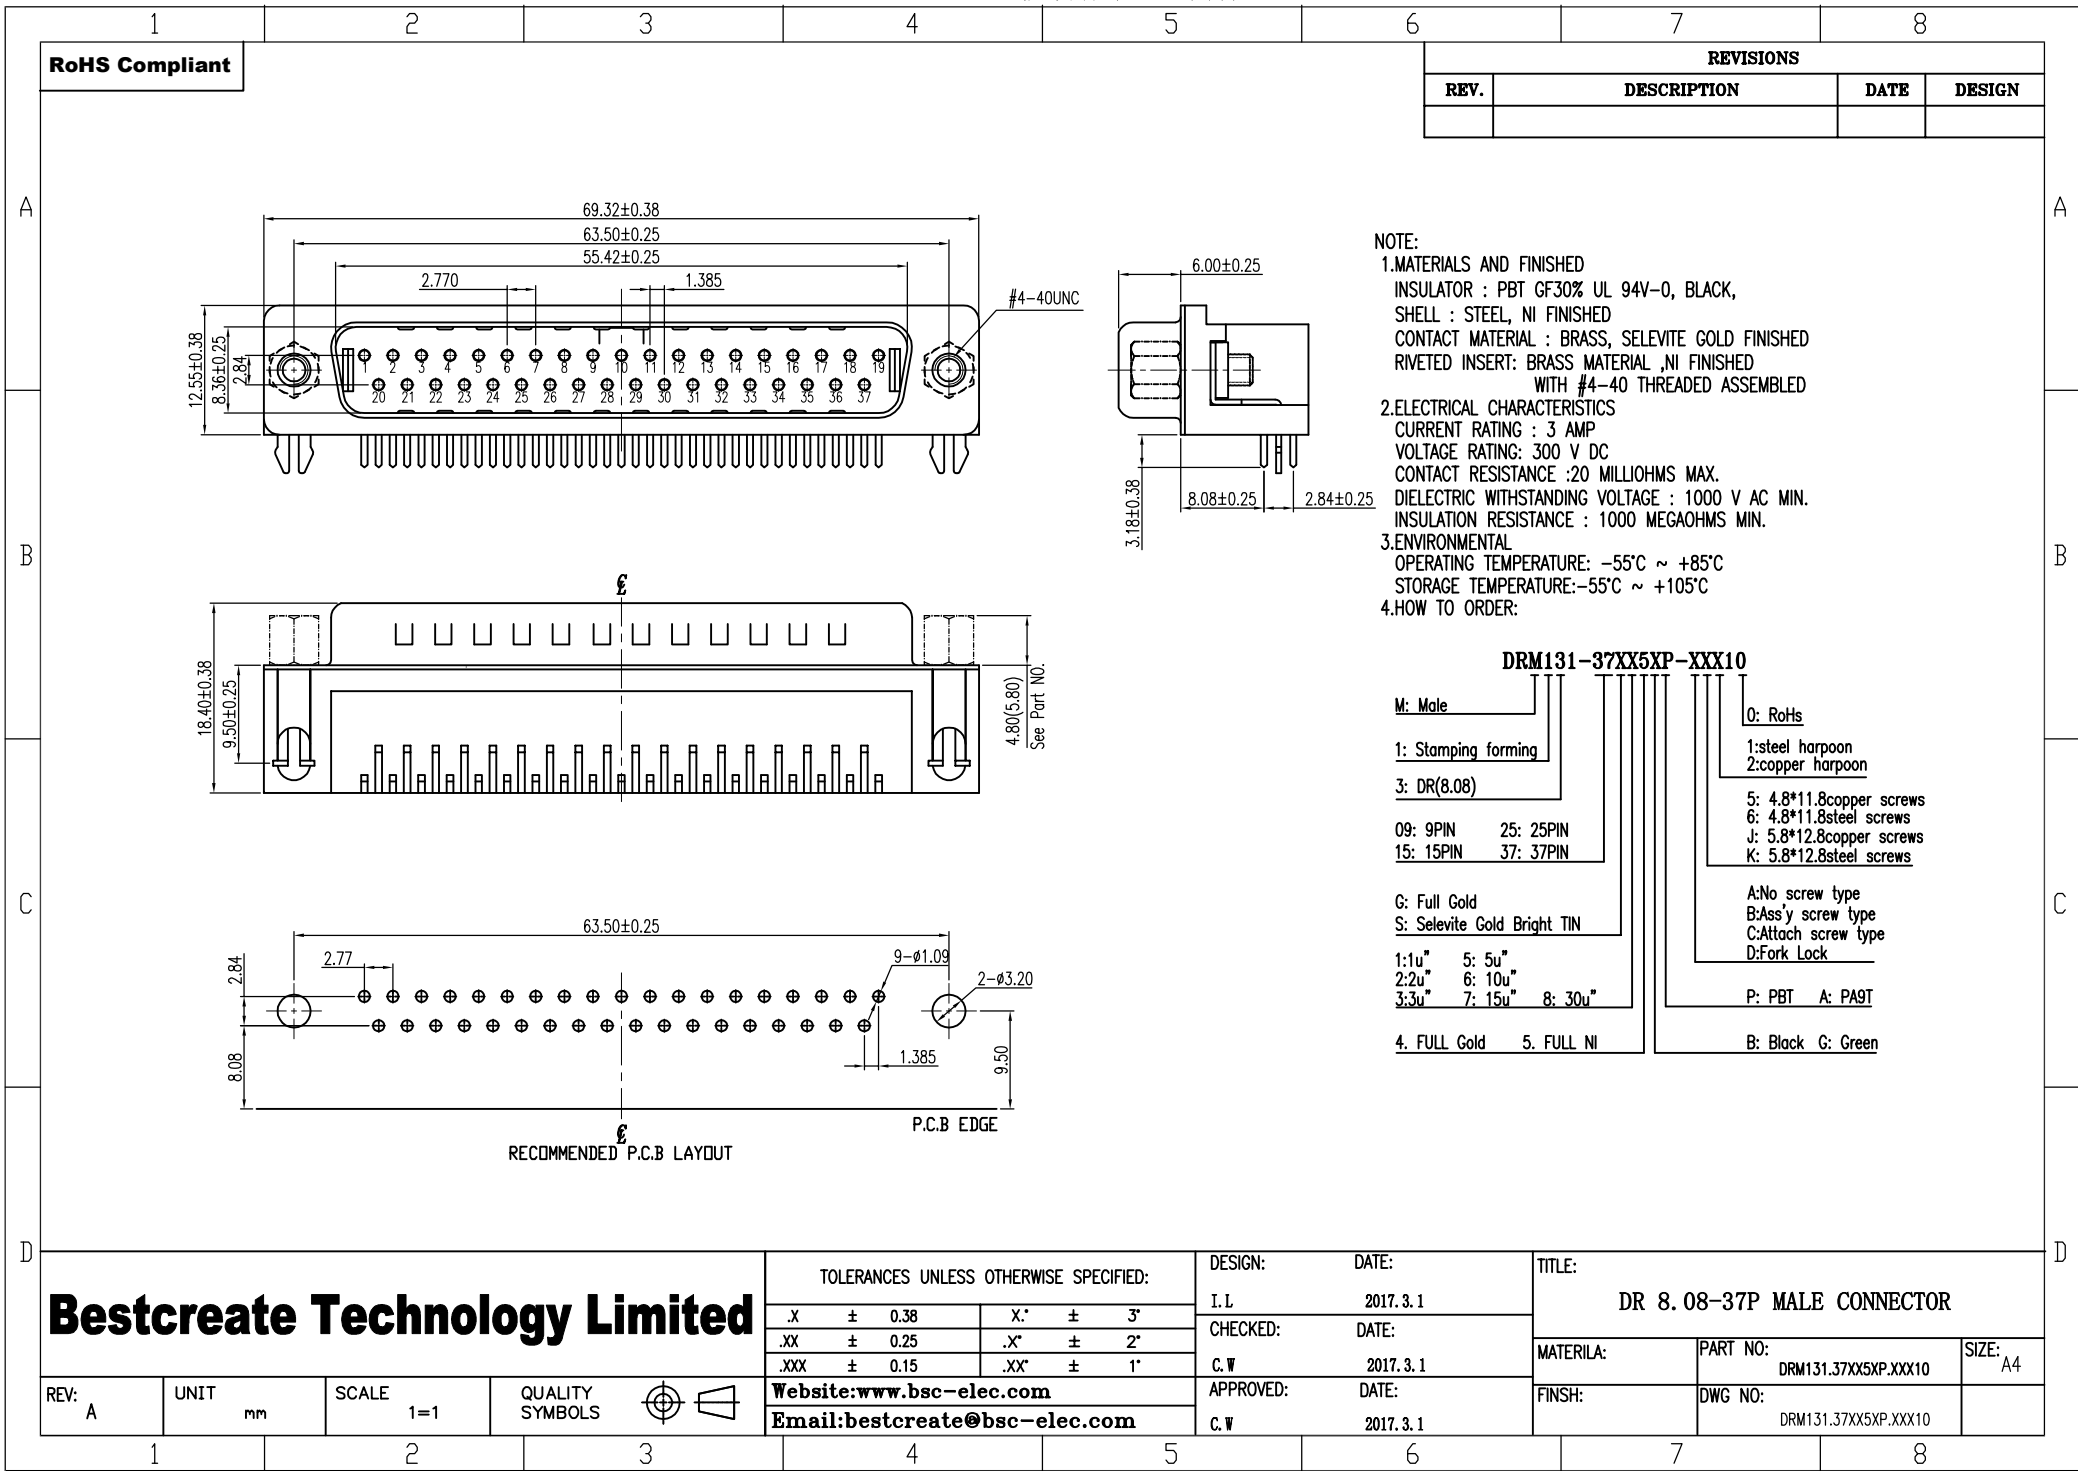

RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

NOTE:

- 1.MATERIALS AND FINISHED
INSULATOR : PBT GF30% UL 94V-0, BLACK,
SHELL : STEEL, NI FINISHED
CONTACT MATERIAL : BRASS, SELEVITE GOLD FINISHED
RIVETED INSERT: BRASS MATERIAL ,NI FINISHED
WITH #4-40 THREADED ASSEMBLED
- 2.ELECTRICAL CHARACTERISTICS
CURRENT RATING : 3 AMP
VOLTAGE RATING: 300 V DC
CONTACT RESISTANCE :20 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
INSULATION RESISTANCE : 1000 MEGAOHMS MIN.
- 3.ENVIRONMENTAL
OPERATING TEMPERATURE: -55°C ~ +85°C
STORAGE TEMPERATURE:-55°C ~ +105°C
- 4.HOW TO ORDER:

DRM131-37XX5XP-XXX10

M: Male	0: RoHs
1: Stamping forming	1:steel harpoon 2:copper harpoon
3: DR(8.08)	5: 4.8*11.8copper screws 6: 4.8*11.8steel screws J: 5.8*12.8copper screws K: 5.8*12.8steel screws
09: 9PIN 15: 15PIN	A:No screw type B:Ass'y screw type C:Attach screw type D:Fork Lock
25: 25PIN 37: 37PIN	P: PBT A: PA9T
G: Full Gold S: Selevite Gold Bright TIN	B: Black C: Green
1:1u" 5: 5u" 2:2u" 6: 10u" 3:3u" 7: 15u" 8: 30u"	
4. FULL Gold 5. FULL NI	

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	± 0.38	X."	± 3"
.XX	± 0.25	.X"	± 2"
.XXX	± 0.15	.XX"	± 1"
Website:www.bsc-elec.com			
Email:bestcreate@bsc-elec.com			

DESIGN:	DATE:
I.L	2017. 3. 1
CHECKED:	DATE:
C.W	2017. 3. 1
APPROVED:	DATE:
C.W	2017. 3. 1

TITLE:		
DR 8.08-37P MALE CONNECTOR		
MATERILA:	PART NO:	SIZE:
	DRM131.37XX5XP.XXX10	A4
FINSH:	DWG NO:	
	DRM131.37XX5XP.XXX10	

REV:	UNIT	SCALE	QUALITY SYMBOLS
A	mm	1=1	