
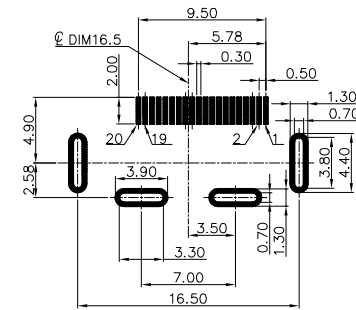
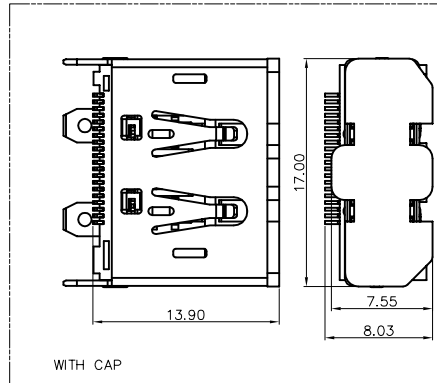


RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN



RECOMMEND P.C.B. LAYOUT(TOP VIEW)
(P.C.B THICKNESS=1.60mm)

SPECIFICATION

1. CURRENT RATING : 0.5 A MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 100M OHMS MIN.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -20°C TO +85°C.
6. INSERTION FORCE : 4.5kgf MAX.
7. EXTRACTION FORCE : 1.0~4.0kgf MIN.
8. SALT SPRAY : 24 HOURS PASS.
9. REFLOW SOLDERING(SMD COMPONENT) OVEN TEMPERATURE: 260°C.5SEC







PART NO. INFORMATION

DP09- F X X 5 R - 007

GENDER
F: FEMALE
M: MALE

CONTACT PLATED
1: GOLD FLASH
2: GOLD 3U"
3: GOLD 5U"
4: GOLD 10U"
5: GOLD 15U"
6: GOLD 30U"

PACKAGE
R: TAPE REEL T: TRAY
HOUSING COLOR
2: WHITE
5: BLACK
9: NATURE
HOUSING MATERIAL
A: LCP B: PBT
C: PA9T D: PA6T
E: FA46 F: PA66

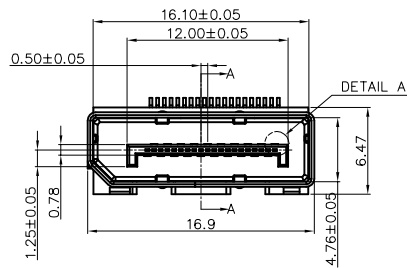

3	CONTACTS	20	COPPER ALLOY, GOLD PLATED OVER NICKEL ON CONTACT AREA AND 100u" MIN. TIN PLATED OVER NICKEL ON SOLDER TAILS
2	HOUSING	1	THERMOPLASTIC UL94V-0
1	SHELL	1	S50C,NICKEL PLATED
ITEM	NAME	Q'TY	NOTES

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	± 0.35	X'	± 2'
.XX	± 0.25	.X'	± 1'
.XXX	± 0.15	.XX'	± 0.5'

Website: www.bsc-elec.com

Email: bestcreate@bsc-elec.com

DESIGN: I.L. DATE: 2017.3.1

CHECKED: C.W. DATE: 2017.3.1

APPROVED: C.W. DATE: 2017.3.1

TITLE: VERTICAL SMT DISPLAYPORT FEMALE CONNECTOR H=13MM





MATERILA:	PART NO: DP09-FXX5R-011	SIZE: A4
FINSH:	DWG NO: DP09-FXX5R-011	

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------

RoHS Compliant



REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

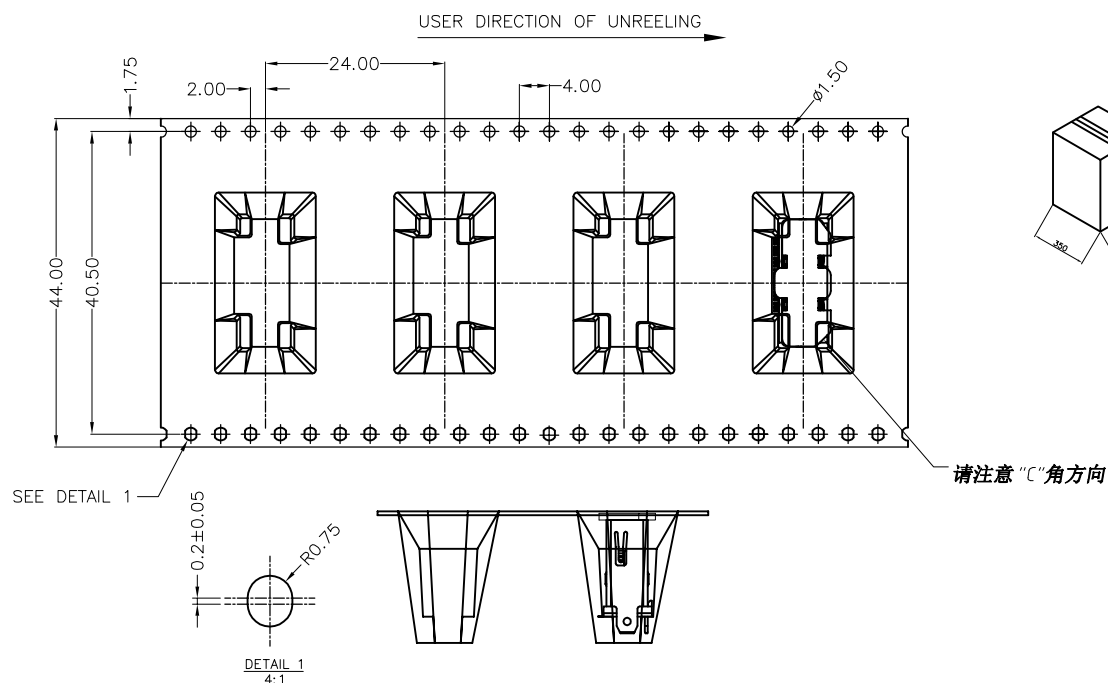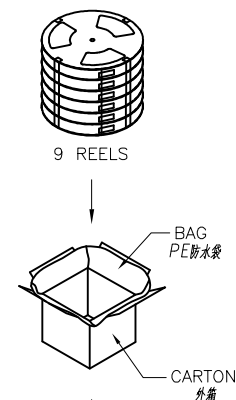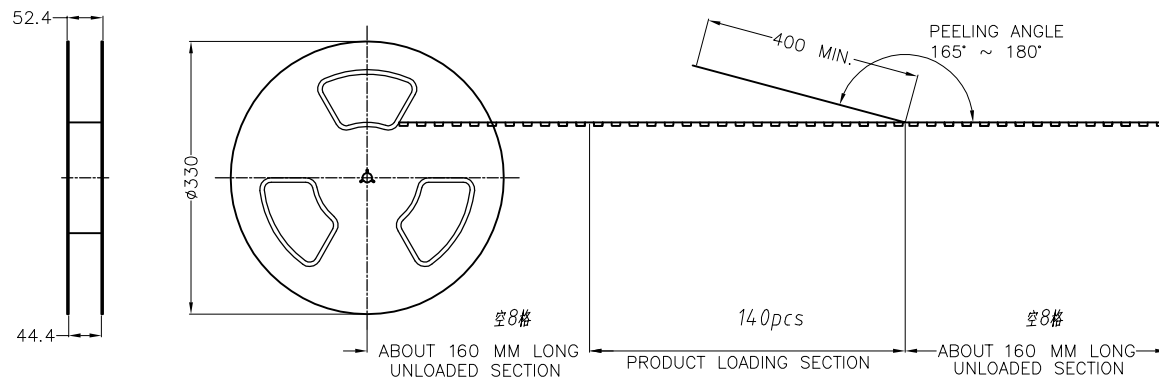

PACKAGE
1. SIZE :
REEL : DIA. =330mm
CORTON (外箱) : 350x350x450mm (LxWxH)
2. QUANTITY :
140 PCS/REEL (卷)
9 REELS/CARTON : 1260PCS

请注意“C”角方向



Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	± 0.35	.X"	± 2"
.XX	± 0.25	.X"	± 1"
.XXX	± 0.15	.X"	± 0.5"

Website: www.bsc-elec.com

Email: bestcreate@bsc-elec.com

DESIGN: I. L. DATE: 2017. 3. 1

CHECKED: C. W. DATE: 2017. 3. 1

APPROVED: C. W. DATE: 2017. 3. 1

TITLE: VERTICAL SMT DISPLAYPORT FEMALE CONNECTOR
H=13MM

MATERIAL: PART NO: DP09-FXX5R-011 SIZE: A4

FINISH: DWG NO: DP09-FXX5R-011

REV: A UNIT mm SCALE 1=1 QUALITY SYMBOLS