

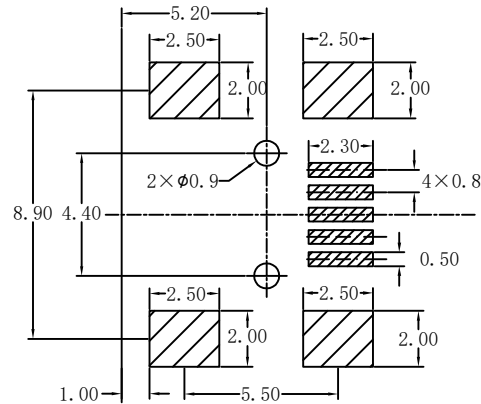
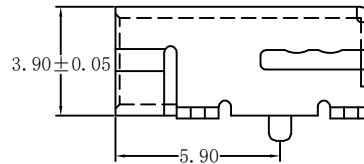



RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

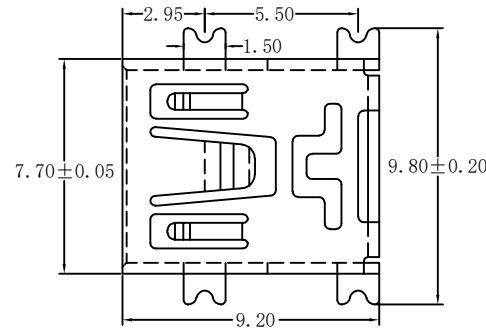

RECOMMENDED PCB LAYOUT

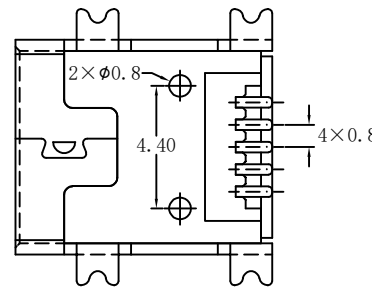

规格说明:Specifications:
 电气特性:Electrical:

1. 额定电流: Current Rating
1.0A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗:Contact Resistance
50 milliohms MAX
4. 耐电压:Dielectric Withstanding Voltage:
300 V AC AT Sea Level
5. 绝缘阻抗:Insulation Resistance:
100MEGA ohms MIN


原材料:Raw material:

1. 塑胶:Plastic cement:
Hing Temperature Thermoplastics,
LCP Black
2. 端子:Contact:Copper Alloy C2680/C5191
3. 外壳:Shell:SPCC/Copper Alloy C2680

电镀:Electroplate:

1. 端子:Contact: Plated Gold in Mating Area;
Tin On Solder Talls
2. 外壳:Shell:
Nickel Plating

PART NO. INFORMATION

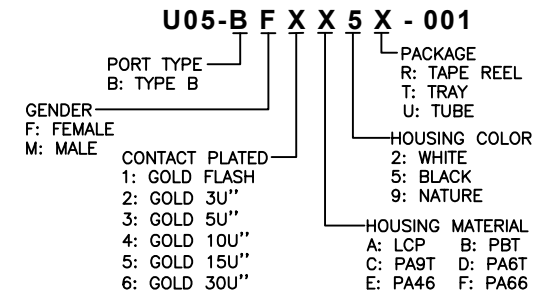

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	±	0.50	X.'	±	3'
.X	±	0.25	.X'	±	2'
.XX	±	0.15	.XX'	±	1'

Website:www.bsc-elec.com

Email:bestcreate@bsc-elec.com

DESIGN: I.L DATE: 2017.3.1

CHECKED: C.W DATE: 2017.3.1

APPROVED: C.W DATE: 2017.3.1

TITLE: MINI USB 5P B FEMALE CONNECTOR

MATERILA: PART NO: U05-BFXX5X-001 SIZE: A4

FINSH: DWG NO: U05-BFXX5X-001

REV: A UNIT mm SCALE 1=1 QUALITY SYMBOLS