


RoHS Compliant



REVISIONS

REV.	DESCRIPTION	DATE	DESIGN



Circuit 1

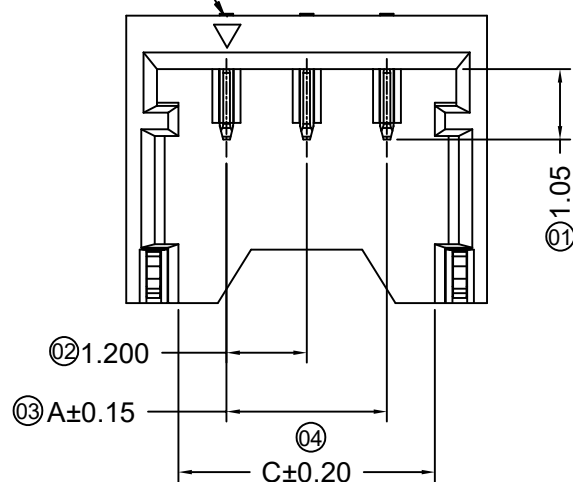

2-3 Pin
Without Sticking Point

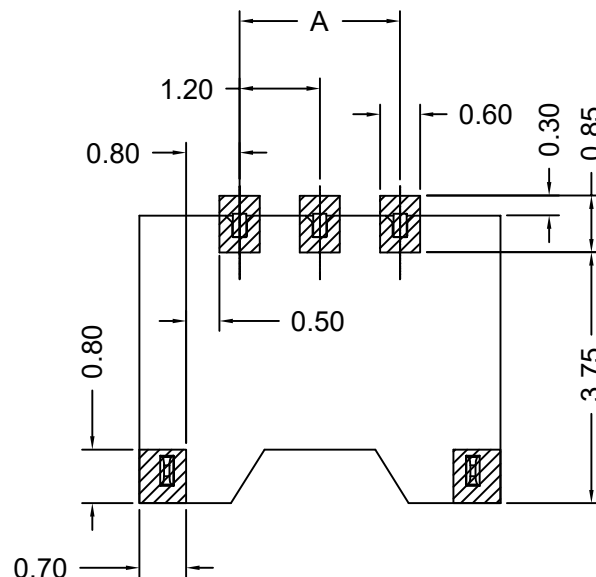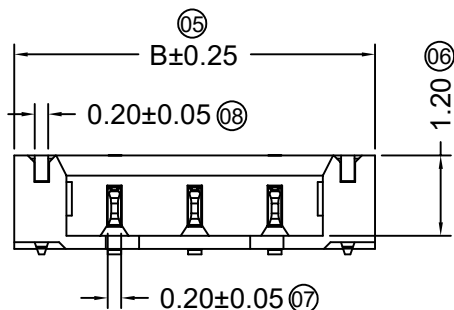

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

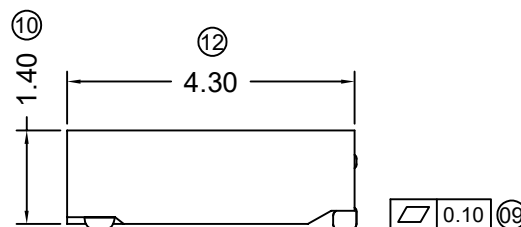

3D View

■ Specification

- Voltage Rating : 50V AC/DC
- Current Rating : 2A AC/DC
- Withstanding Voltage : 500V AC /minute
- Insulation Resistance : ≥100MΩ min
- Temperature Range : -40°C to + 105°C
- Contact Resistance : ≤20mΩ
- After Environmental Testing: ≤40mΩ
- Suitable Wire/Cable:AWG #28 to #30,OD:0.8mm max

■ Ordering Information

A1203 W R S - XX 4T - BK G
1 2 3 4 5 6 7 8

- 1.Series No.
- 2.Category:W-Wafer
- 3.Welding Board Angle:R-Vertical/90°
- 4.Welding Way:S-SMT Type
- 5.Circuit No:XX
- 6.Material(Insulators):4T-PA4T,UL94V-0
- 7.Color:Blank-Natural;BK-Black
- 8.Plating Method: S-Bright Tin Plated;M-Me Tin Plated;G-Gold Plated, I-Au 3U"

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	1.20	4.20	2.64	03	2.40	5.40	3.84

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	±	0.30	.X'	±	3'
.XX	±	0.20	.X'	±	2'
.XXX	±	0.10	.X'	±	1'

Website:www.bsc-elec.com

Email:bestcreate@bsc-elec.com

DESIGN:

I. L

CHECKED:

C. W

APPROVED:

C. W

DATE:

2017. 3. 1

DATE:

2017. 3. 1

DATE:

2017. 3. 1

TITLE:

1.2mm (0.47") pitch PCB Header/Wafer R/A
SMD/SMT Connector

MATERILA:

FINSH:

PART NO:

DWG NO:

SIZE: A4

A1203WRS-XX4T-BKG

A1203WRS-XX4T-BKG

REV:

A

UNIT


mm

SCALE

1=1

QUALITY

SYMBOLS



1

2

3

4

5

6

7

8