

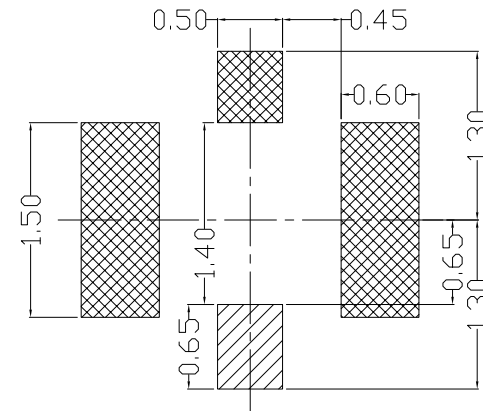

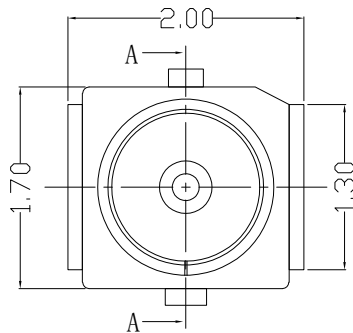

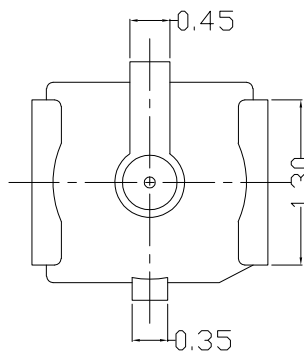


RoHS Compliant

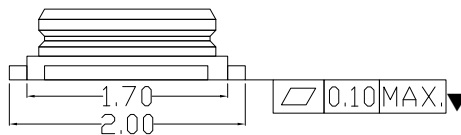

▨ Contact Pad ▨ Shell Pad

RECOMMENDED PCB LAYOUT



NOTE: UNLESS OTHERWISE SPECIFIED

1. DIMENSION SHALL BE INTERPRETED PER ANSI Y14.5M-1994.
2. DIMENSION MARKED WITH "▼" SHOULD SPECIFIED ON INSPECTION PLAN.
3. CONTACT RETENTION FORCE: 0.2 N MIN.
4. CONTACT MATERIAL: COPPER ALLOY.
5. INSULATOR: HIGH TEMPERATURE PLASTIC UL94 V-0.
6. CENTRE CONTACT FINISH: GOLD PLATED 5u" MIN, OUTER CONTACT FINISH: GOLD FLASH 1u" MIN. ALL LVER 50u" NICKEL MIN, UNDER PLATED.
7. LOW PROFILE: 1.5MM MAX, MATING HEIGHT.
8. APPLICATION FREQUENCY UP TO 6G HZ.

WEIGHT: 0.0045g

1		MHF series micro coaxial connector plug vertical (ground contact: gold plating)	1
ITEM	PART NUMBER	DESCRIPTION	QTY
TOLERANCES UNLESS OTHERWISE SPECIFIED:		DESIGN: I.L	DATE: 2017.3.1
		CHECKED: C.W	DATE: 2017.3.1
		APPROVED: C.W	DATE: 2017.3.1
		TITLE: RF HEADER (MHF 4 Receptacle)	
		MATERIAL: PART NO: RF4006-A001	SIZE: A4
		FINISH: DWG NO: RF4006-A001	SHEET 1 OF 2

Bestcreate Technology Limited

REV: A UNIT mm SCALE 1=1 QUALITY SYMBOLS

Website: www.bsc-elec.com
Email: bestcreate@bsc-elec.com

