
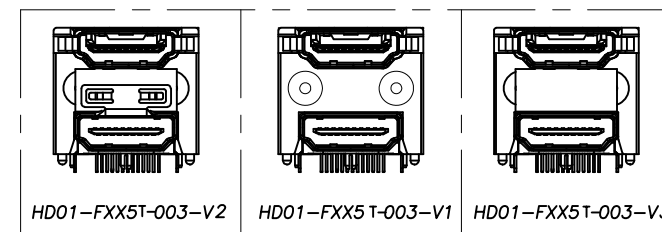
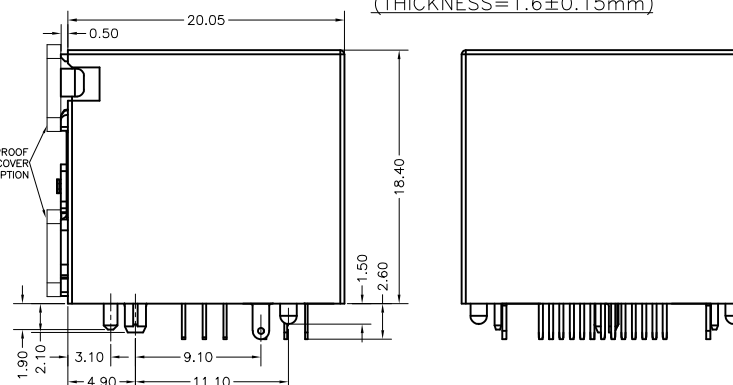
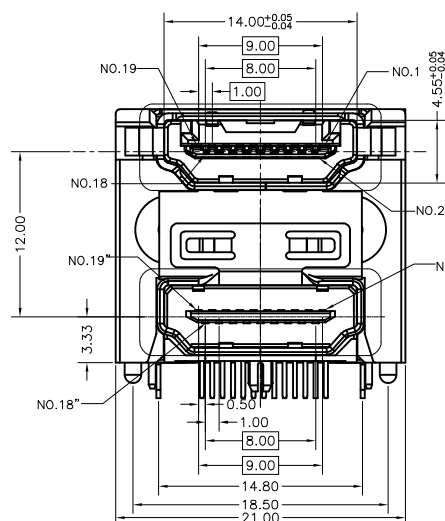
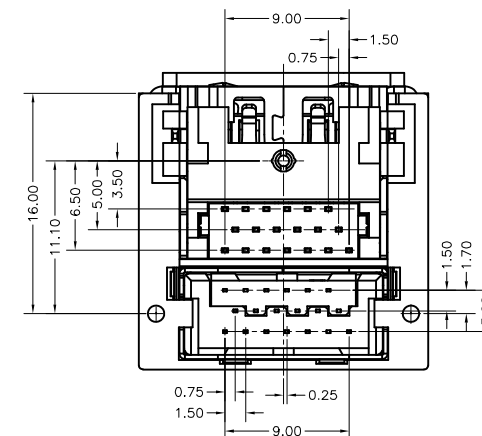
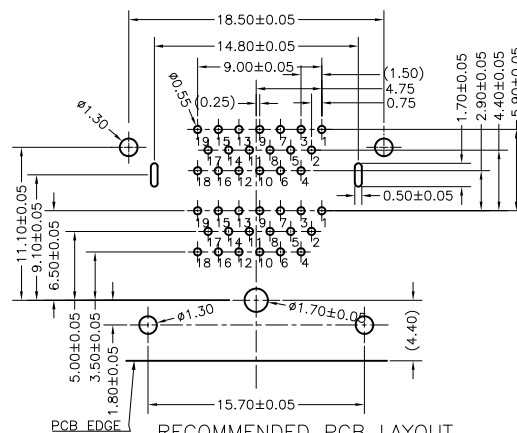


RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

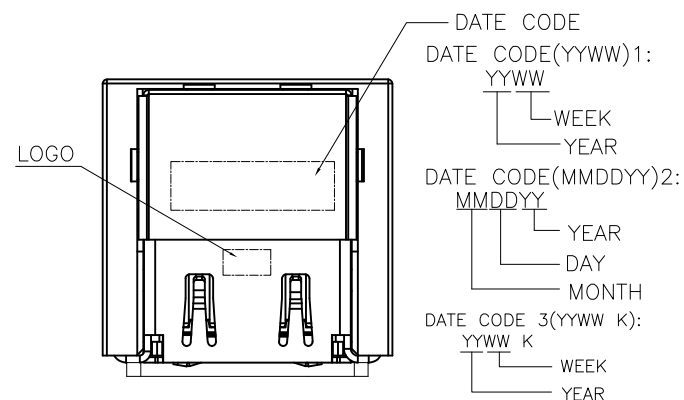

SPECIFICATIONS

SPECIFICATIONS
 OPERATING CURRENT: 0.5A MAX.
 OPERATION TEMPERATURE: -25°C TO +85°C
 DIELECTRIC WITHSTANDING VOLTAGE:
 500Volts AC BETWEEN ADJACENT TERMINAL(UNMATE)
 300Volts AC BETWEEN ADJACENT TERMINAL(MATE)
 INSULATION RESISTANCE:
 100Mohm MIN.(UNMATED);10Mohm MIN.(MATED)

PART NO. INFORMATION

DHD01 - F X X 5 T - 003 - V2

GENDER—
F: FEMALE
M: MALE

CONTACT	PLATED
1: GOLD	FLASH
2: GOLD	3U"
3: GOLD	5U"
4: GOLD	10U"
5: GOLD	15U"
6: GOLD	30U"

PACKAGE
 T: TRAY
 HOUSING COLOR
 2: WHITE
 5: BLACK
 9: NATURE
 HOUSING MATERIAL
 A: LCP B: PBT
 C: PA9T D: PA6T
 E: PA46 F: PA66

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:				DESIGN:	DATE:	TITLE: DUAL HDMI STACKED CONNECTOR THROUGH HOLE TYPE		
X. ± 0.50		X' ± 3'		I. L	2017. 3. 1			
.X ± 0.25		.X' ± 2'		CHECKED:	DATE:	MATERILA:		
.XX ± 0.15		.XX' ± 1'		C. W	2017. 3. 1			
Website:www.bsc-elec.com				APPROVED:	DATE:	FINSH:		
Email:bestcreate@bsc-elec.com				C. W	2017. 3. 1			
							PART NO: DHD01-FXX5T-003-V2	SIZE: A4
							DWG NO: DHD01-FXX5T-003-V2	

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS	
--------	------------	--------------	--------------------	---