
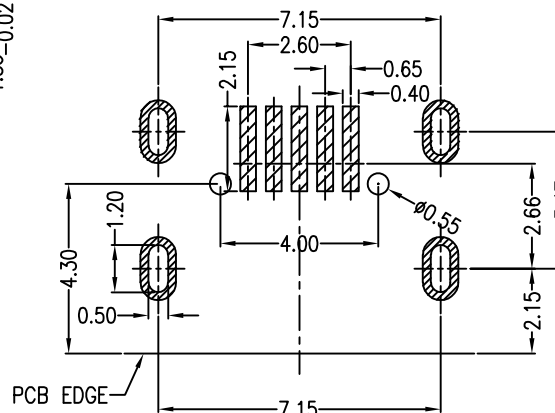
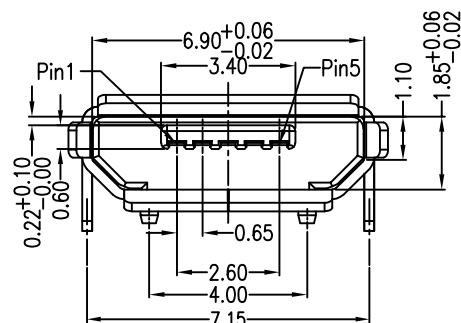
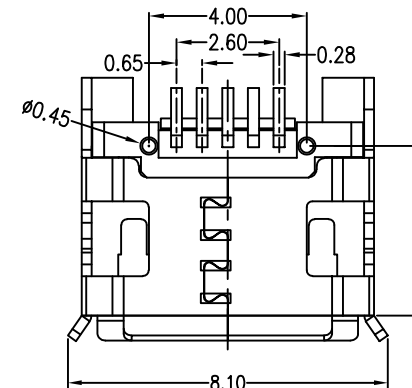

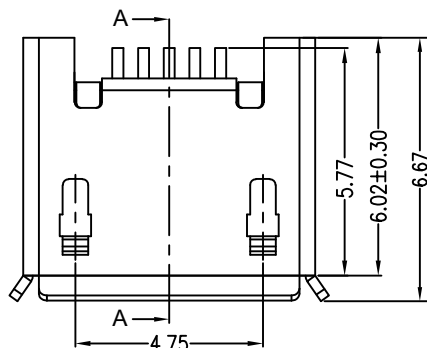
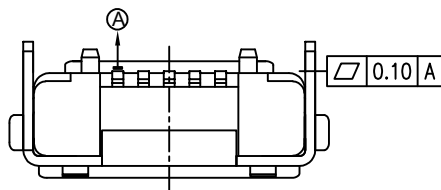


RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN



RECOMMENDED PCB LAYOUT
PCB图仅供参考

Note:

1.Material:

- 1.1 Housing: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: copper alloy,t=0.20mm
- 1.3 Shell: copper alloy,t=0.25mm

2.Specification:

- 2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min.
- 2.5 Total mating force: 3.57 KgF Max.
- 2.6 Total unmating force: 1.0 KgF Min.
- 2.7 Temperature range: -30°C~80°C

PART NO. INFORMATION

U01-B F X X 5 R -713

PORT TYPE B: TYPE B	PACKAGE R: TAPE REEL
GENDER F: FEMALE M: MALE	HOUSING COLOR 2: WHITE 5: BLACK 9: NATURE
CONTACT PLATED 1: GOLD FLASH 2: GOLD 3U" 3: GOLD 5U" 4: GOLD 10U" 5: GOLD 15U" 6: GOLD 30U"	HOUSING MATERIAL A: LCP B: PBT C: PA9T D: PA6T E: PA46 F: PA66

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	± 0.15	X.	± 3°
.XX	± 0.10	.X°	± 2°
.XXX	± 0.05	.XX°	± 1°

Website: www.bsc-elec.com

E-mail: bestcreate@bsc-elec.com

DESIGN:

I. L

DATE:

2023/4/1

CHECKED:

C. W

DATE:

2023/4/1

APPROVED:

C. W

DATE:

2023/4/1

TITLE:

Micro usb 5P B Type 插板7.2
有柱脚长0.8四脚全插加长0.75

MATERIAL:

PART NO:

U01-BFXX5R-713

SIZE:

A4

FINISH:

DWG NO:

U01-BFXX5R-713

SHEET:

1 OF 1

REV:

A

UNIT

mm

SCALE

1=1

QUALITY

SYMBOLS

