


RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

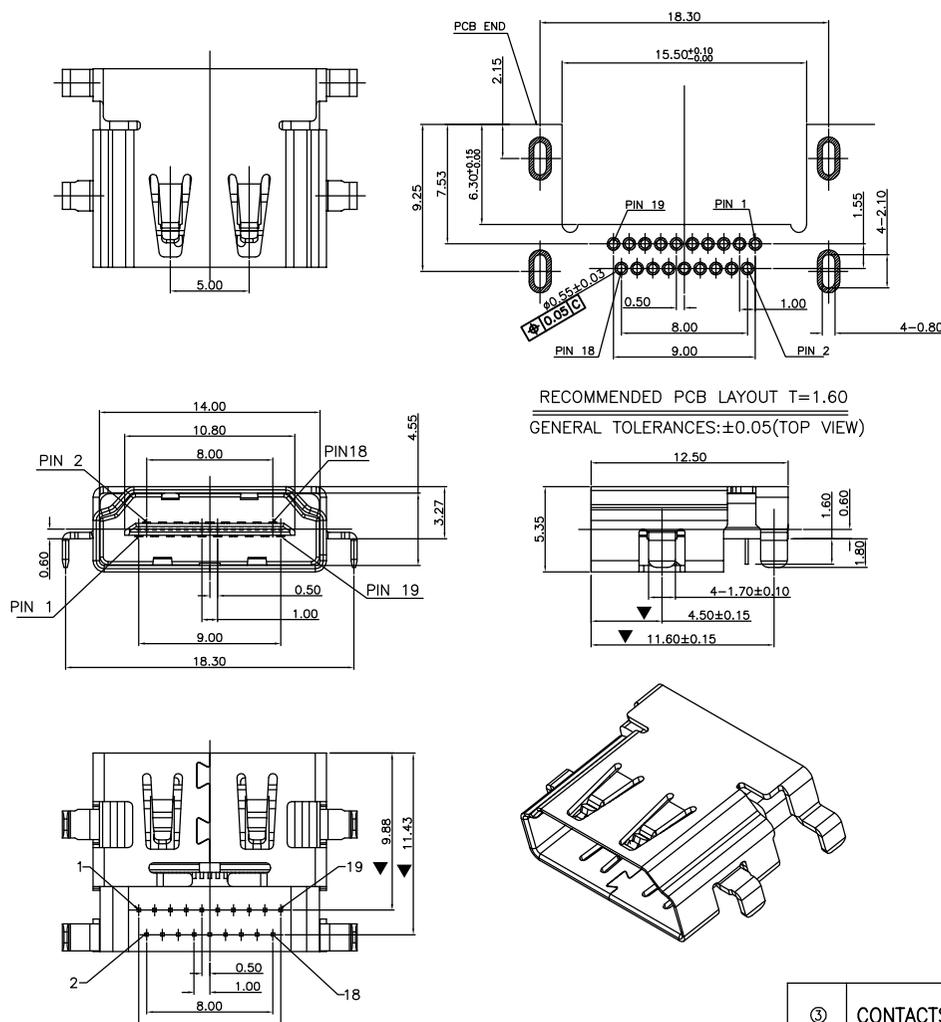

NOTES:
 1.ELECTRONIC:
 CONTACT RESISTANCE: 20mohm MAX
 INSULATION RESISTANCE: 1000 Mohm MIN
 WITHSTAND VOLTAGE:AC 500V,1min.
 2.MECHANICAL:
 DURABILITY: 10000 CYCLE.
 3.ENVIRONMENT CHARACTERISTICS:
 OPERTING TEMPERATURE:-55°C TO +105°C
 4.RECOMMANDER PCB THICKNESS 1.2 TO 1.60MM

RECOMMENDED PCB LAYOUT T=1.60
 GENERAL TOLERANCES:±0.05(TOP VIEW)

PART NO. INFORMATION

HD01-A F X X 5 R - 014

PORT TYPE
 A: TYPE A
 GENDER
 F: FEMALE
 M: MALE
 CONTACT PLATED
 1: GOLD FLASH
 2: GOLD 3U''
 3: GOLD 5U''
 4: GOLD 10U''
 5: GOLD 15U''
 6: GOLD 30U''
 PACKAGE
 R: TAPE REEL
 HOUSING COLOR
 2: WHITE
 5: BLACK
 9: NATURE
 HOUSING MATERIAL
 A: LCP B: PBT
 C: PA9T D: PA6T
 E: PA46 F: PA66

ITEM	NAME	Q'TY	NOTES
③	CONTACTS	19	COPPER ALLOY, GOLD PLATED OVER NICKEL ON CONTACT AREA AND 100U'' MIN TIN PLATED OVER NICKEL ON SOLDER TAILS
②	HOUSING	1	THERMOPLASTIC UL94V-0
①	SHELL	1	SUS&COPPER ALLOY OR SPCC,NICKEL PLATED

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DESIGN:	DATE:
X.	± 0.35	I. L	2017. 3. 1
.X	± 0.25	CHECKED:	DATE:
.XX	± 0.15	C. W	2017. 3. 1
X' ± 3'		APPROVED:	DATE:
.X' ± 2'		C. W	2017. 3. 1
.XX' ± 1'			

TITLE:		
HDMI AF 反向沉板3.27 DIP		
MATERILA:	PART NO:	SIZE:
	HD01-AFXX5R-014	A4
FINSH:	DWG NO:	
	HD01-AFXX5R-014	

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------

Tel/Whatsapp:0086-13712299763
 Skype: belle.wu3340

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作