
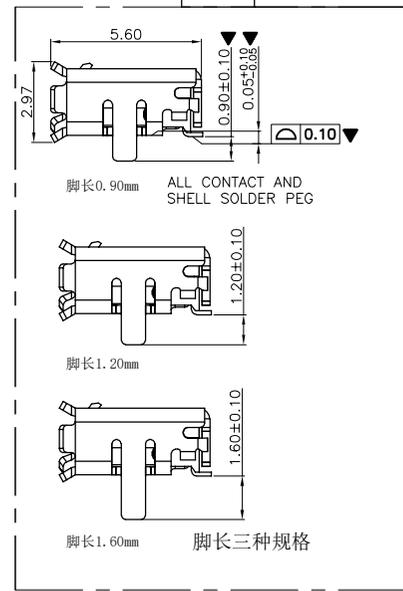
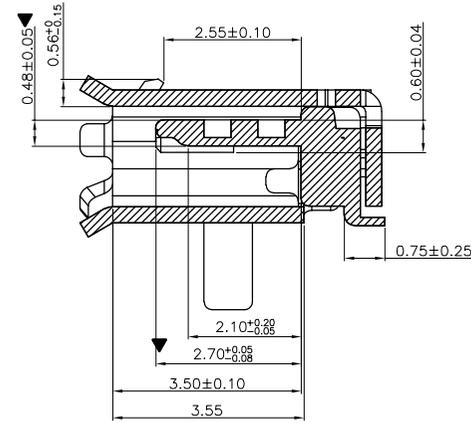






RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

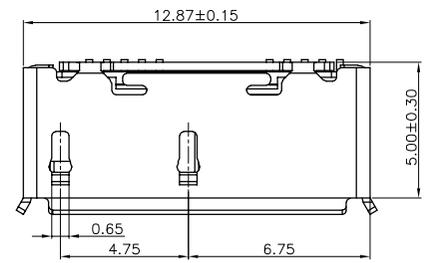

备注:
 1. 材质:
 1.1 胶芯: LCP UL94V-0
 1.2 端子: C2680R-H,
 T=0.15接触区镍底, 镀半金,
 焊线区镍底, 镀锡
 1.3 外壳: SUS304 镀镍 T=0.3
 2. 主要特性:
 2.1 额定电流: 1.5A
 2.2 接触阻抗: 30mΩ MAX
 2.3 绝缘阻抗: 100MΩ MIN
 2.4 耐压测试: 100V AC
 2.5 沾锡性: 温度245+/-5℃,
 时间3-5S
 2.6 整体插入力: 3.5kgf MAX
 整体拔出力: 1.00kgf MIN
 2.7 使用寿命: 10000次
 2.8 耐温性: IR炉测试: 260+/-10℃
 2.9 工作温度: -20℃~+60℃

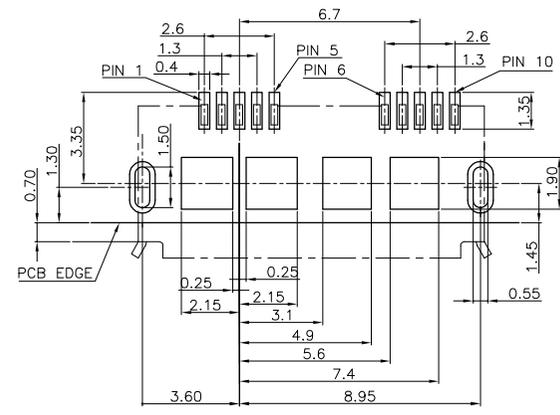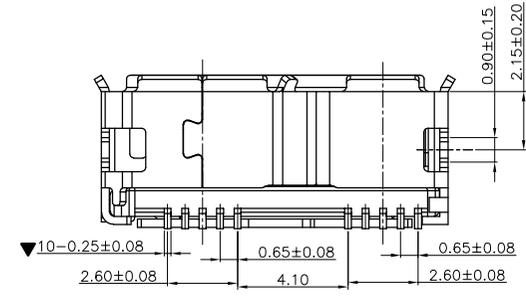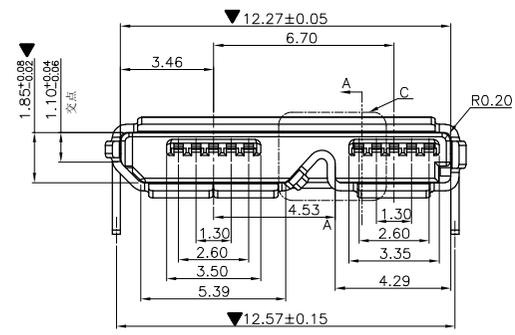

PART NO. INFORMATION

U04-B F X X 5 R - 005

PORT TYPE
 B: TYPE B
 GENDER
 F: FEMALE
 M: MALE
 CONTACT PLATED
 1: GOLD FLASH
 2: GOLD 3U''
 3: GOLD 5U''
 4: GOLD 10U''
 5: GOLD 15U''
 6: GOLD 30U''
 PACKAGE
 R: TAPE REEL
 HOUSING COLOR
 2: WHITE
 5: BLACK
 9: NATURE
 HOUSING MATERIAL
 A: LCP B: PBT
 C: PA9T D: PA6T
 E: PA46 F: PA66

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.50	X'	± 3'
.X	± 0.25	.X'	± 2'
.XX	± 0.15	.XX'	± 1'

Website: www.bsc-elec.com
 Email: bestcreate@bsc-elec.com

DESIGN:	I. L	DATE:	2017. 3. 1
CHECKED:	C. W	DATE:	2017. 3. 1
APPROVED:	C. W	DATE:	2017. 3. 1

TITLE: MICRO USB 3.0 BF SMT 外壳两DIP脚间距12.55		
MATERILA:	PART NO: U04-BFXX5R-005	SIZE: A4
FINSH:	DWC NO: U04-BFXX5R-005	

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------