
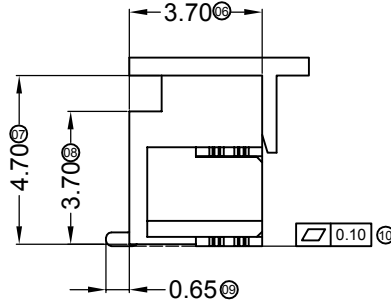
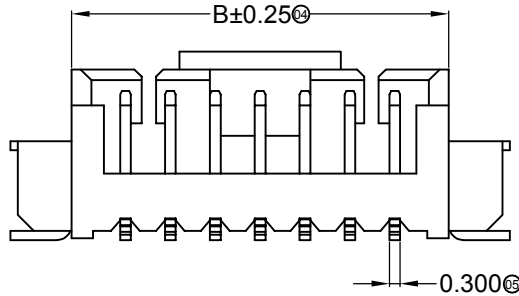
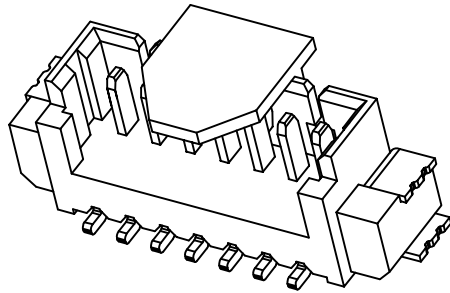



RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN


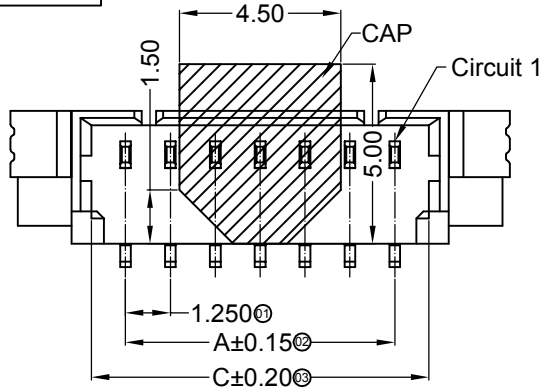


■ Specifications :

- Voltage rating: 125V AC / DC
- Current rating: 1A AC / DC
- Withstanding voltage: 250V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤40mΩ

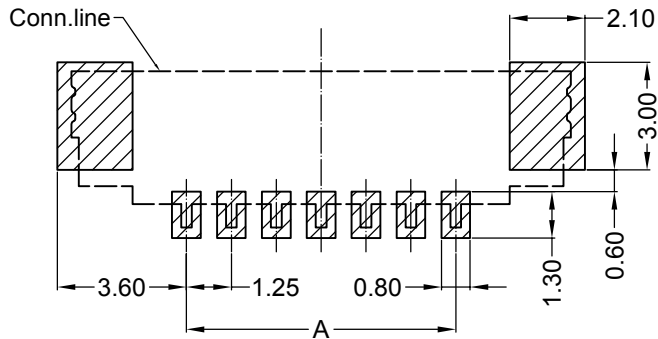

Recommended P.C.B Layout
General Tolerance±0.05



Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	1.25	4.25	3.15	10	11.25	14.25	13.15
03	2.50	5.50	4.40	11	12.50	15.50	14.40
04	3.75	6.75	5.65	12	13.75	16.75	15.65
05	5.00	8.00	6.90	13	15.00	18.00	16.90
06	6.25	9.25	8.15	14	16.25	19.25	18.15
07	7.50	10.50	9.40	15	17.50	20.50	19.40
08	8.75	11.75	10.65	16	18.75	21.75	20.65
09	10.00	13.00	11.90				

1251WVS-XX-LP	LCP UL 94V-0	Phorphos Bronze	Tin-Plated	Phorphos Bronze	Tin-Plated	1251H
Part No.	Material	Material(Pin)	Finish(Pin)	Material (Solder Tabs)	Finish (Solder Tabs)	Mates With BSC Housing

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	±	0.30	X.*	±	3'
.XX	±	0.20	.X'	±	2'
.XXX	±	0.10	.XX'	±	1'

Website:www.bsc-elec.com
Email:bestcreate@bsc-elec.com

DESIGN: I. L
DATE: 2017. 3. 1

CHECKED: C. W
DATE: 2017. 3. 1

APPROVED: C. W
DATE: 2017. 3. 1

TITLE: 1.25MM 180° SMT

MATERIAL: PART NO: 1251WVS-XXS-LP SIZE: A4

FINISH: DWG NO: 1251WVS-XXS-LP

REV: A UNIT mm SCALE 1=1 QUALITY SYMBOLS