


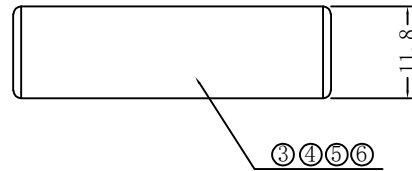



RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

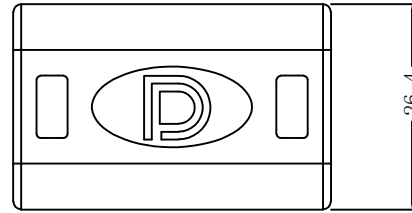

接点表

CN1	CN2
01	12
02	11
03	10
04	09
05	08
06	07
07	06
08	05
09	04
10	03
11	02
12	01
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
SHELL	SHELL

注:

- 100%短/断路&错线测试条件;
- 导通阻抗 $\leq 5\Omega$, 绝缘阻抗 $\geq 10M\Omega$.
高压测试, DC 300V/10mS.
- 产品采用PCB板连接.
- 所用材质须符合ROHS要求.

6	外模	PVC胶料 45P 黑色	5.09.02-1	7.7G
5	内模	PE 胶料 透明	5.09.01-0	4.8G
4	护套	DP 胶护套 黑色	5.04.32	1PCS
3	内连接	PCB板 T=1.6MM	5.12.430	1PCS
2	连接器	DP 20P F 铁壳镀镍&镀金G/F PIN针镀金G/F	镀金:5.04.03 镀镍:5.04.04	1PCS
1	连接器	DP 20P F 铁壳镀镍&镀金G/F PIN针镀金G/F	镀金:5.04.03 镀镍:5.04.04	1PCS
序号	名称	材料	物料编号	用量

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	±	0.50	X'	±	5'
.X	±	0.30	.X'	±	2'
.XX	±	0.10	.XX'	±	1'

DESIGN:

DATE:

I. L

2017. 3. 1

CHECKED:

DATE:

C. W

2017. 3. 1

APPROVED:

DATE:

C. W

2017. 3. 1

TITLE:

DP 20P FEMALE TO DP FEMALE ADAPTER 180°

MATERILA:

PART NO:

DPFTOMIM-008

SIZE:

A4

FINSH:

DWG NO:


DPFTOMIM-008

REV: A

UNIT mm

SCALE 1=1

QUALITY SYMBOLS



Website:www.bsc-elec.com

Email:bestcreate@bsc-elec.com

1

2

3

4

5

6

7

8