
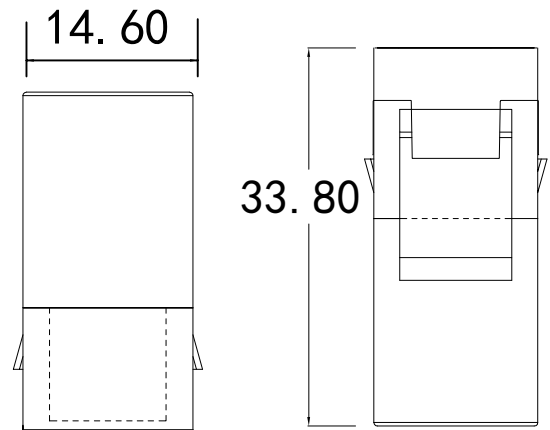
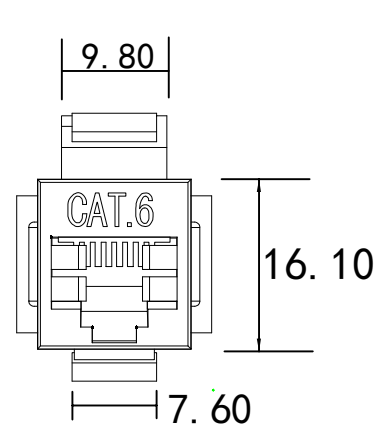
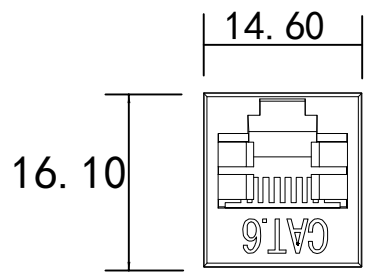


RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

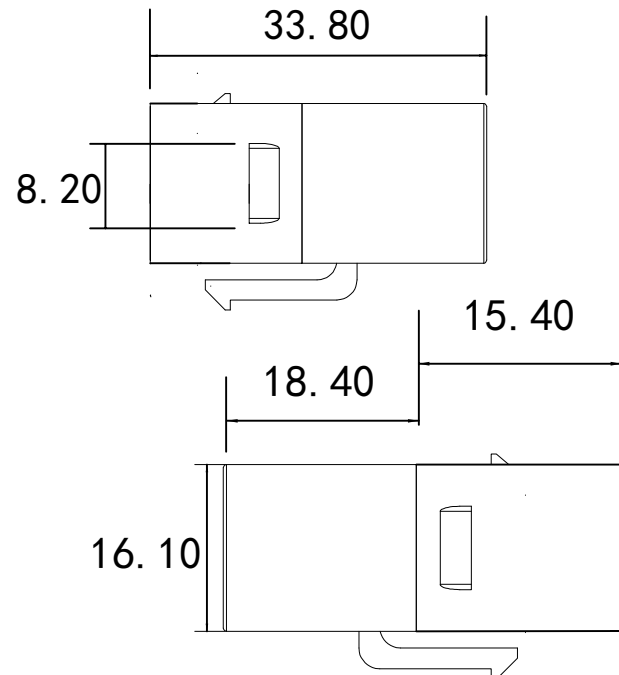

**MATERIAL:**

HOUSING: ABS,UL94V-0 .  
 TERMINAL: PHOSPHOR BRONZE T=0.35MM,  
 3U” GOLD PLATING ON CONTACT AREA.  
 SHIELD: C2680,T=0.20MM,20 MIN NICKEL PLATING  
 ON ALL AREA.

**MACHANICAL:**

DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.  
 OPERATING TEMPERATURE: -20 °C~+75 °C.  
 STORAGE TEMPERATURE: -40°C~+85°C.  
 ALL CRITICAL DIMENSIONS WITH "\*"

**ELECTRICAL:**

VOLTAGE: 125 VOLTS AC.  
 CURRENT RATING :1.5AMP.  
 DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.  
 INSULATION RESISTANCE: 500 MEGA OHMS MIN @ 500V DC.  
 CONTACT RESISTANCE: 30 MILLIOHMS MAX.

**Bestcreate Technology Limited**

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.35	X.*	± 3'
.X	± 0.30	.X.*	± 2'
.XX	± 0.25	.XX.*	± 1'

Website:www.bsc-elec.com  
 Email:bestcreate@bsc-elec.com

DESIGN: I. L DATE: 2017. 3. 1

CHECKED: C. W DATE: 2017. 3. 1

APPROVED: C. W DATE: 2017. 3. 1

TITLE: RJ45 CAT. 6 SEMI-CONDUCTIVE ADAPTER, L=34MM

MATERILA: SC-S-5966-CAT-6-34MM PART NO: SC-S-5966-CAT-6-34MM SIZE: A4

FINSH: DWG NO: SC-S-5966-CAT-6-34MM

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS	
--------	---------	-----------	-----------------	--