
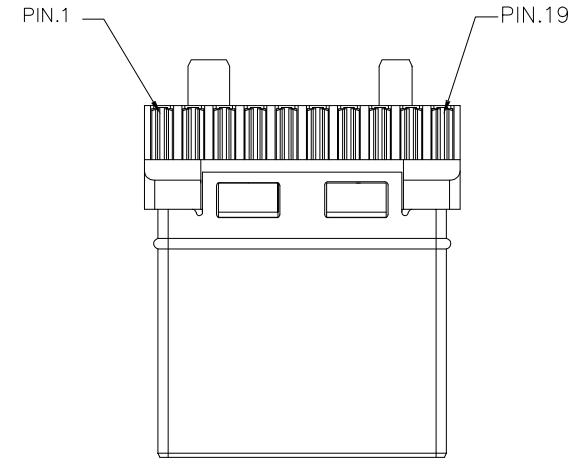
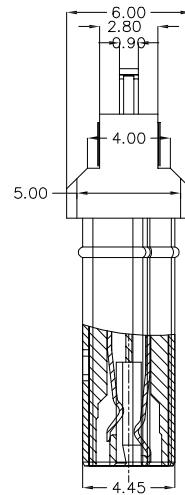


RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

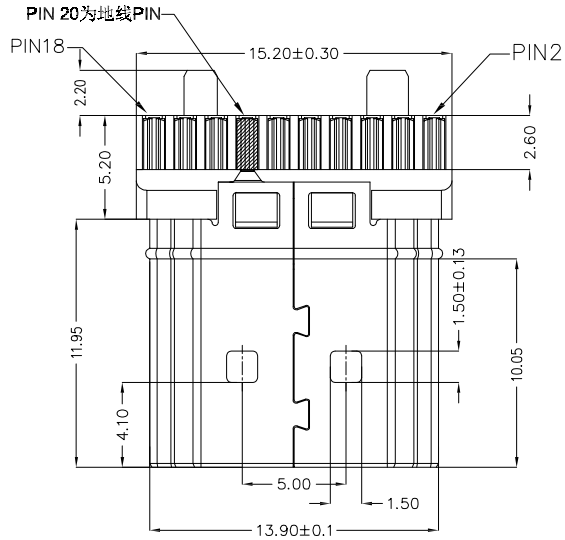

1.MATERIAL:

- 1.1INSULATOR:LCP
- 1.2CONTACT:C2680
- 1.3CONTACT PLATED:GOLD FLASH OVER TIN
- 1.4SHELL:STEEL,NICKEL PLATED OR GLOD PLATED

2.ELECTRICAL CHARACTERISTICS:

- 2.1 CONTACT CURRENT RATING:0.5A Min.
- 2.2 VOLTAGE RATING:40V AC.
- 2.3 CONTACT RESISTANCE:30mΩ Max.
- 2.4 INSULATION RESISTANCE:100MΩ Min.
- 2.5 DIELECTRIC STRENGTH:500V AC/1 minute.


3.ENVIRONMENTAL:

- 3.1 OPERATING TEMPERATURE:-25°C TO +85°C

PART NO. INFORMATION

HD01-A M X X 5 T - 004

- PORT TYPE
B: TYPE A
- GENDER
F: FEMALE
M: MALE
- CONTACT PLATED
1: GOLD FLASH
2: GOLD 3U"
3: GOLD 5U"
4: GOLD 10U"
5: GOLD 15U"
6: GOLD 30U"
- PACKAGE
T: TRAY
- HOUSING COLOR
2: WHITE
5: BLACK
9: NATURE
- HOUSING MATERIAL
A: LCP B: PBT
C: PA9T D: PA6T
E: PA46 F: PA66

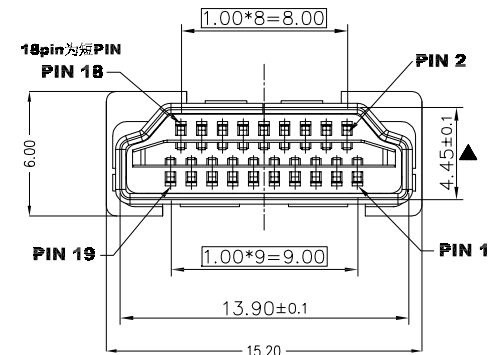

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	±	0.50	X.	±	3'
.X	±	0.25	.X'	±	2'
.XX	±	0.15	.XX'	±	1'

Website:www.bsc-elec.com
Email:bestcreate@bsc-elec.com

DESIGN: I. L. DATE: 2017. 3. 1

CHECKED: C. W. DATE: 2017. 3. 1

APPROVED: C. W. DATE: 2017. 3. 1

TITLE: HDMI 20P WIRE SOLDERING

MATERILA: FINSH: PART NO: HD01-AMXX5T-004 SIZE: A4

DWG NO: HD01-AMXX5T-004

REV: A UNIT mm SCALE 1=1 QUALITY SYMBOLS