

NOTES:


1. Specification:

- 1>. Operating force:1000gf Max
- 2>. Operating Temperature:-40° to+85°
- 3>. Storage Temperature:-40° to+85°
- 3>. Mechanical Life:3000cycles minimum

2. PLATING

GOLD FLASH 1u" (min) SOLDERTALL,  
3u" GOLD PLATING ON THE CONTACT AREA,  
WITH 50u" NICKEL UNDERPLATINGOVERALL.

3. PART NUMBER DESCRIPTION








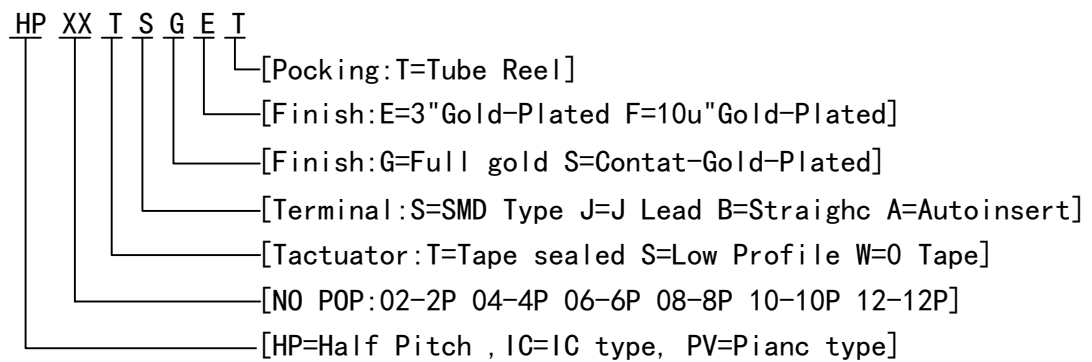


Dimensions (unit:mm)

L type

S type

P.C.B.Layout(unit:mm)

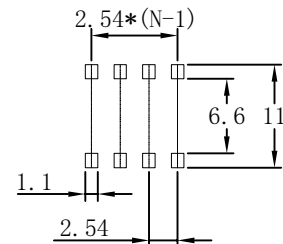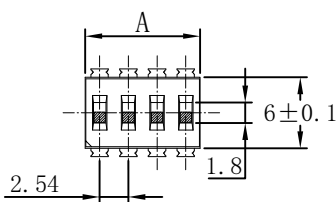

NO. of Positions		2	3	4	5	6	7	8	9	10	12
A	mm	5.08	7.62	10.16	12.7	15.24	17.78	20.32	22.86	25.4	30.48
	inch	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0	1.2