

RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

Features:

- 1.04~50 circuits available;
- 2.Material:Nylon 66 UL 94V-0;
- 3.Accepts H254011-XX terminal;
- 4.Mates with H254013-XX-XX,  
H254014-XX-XX housing;
- 5.Coloe: White




Rated Current: 3.0 AMP

Voltage rating:1000V AC/DC

Contact resistance:20mΩ Max

Insulation resistea:1000MΩ Min

Ambient tempetature rang:-25℃~+85℃

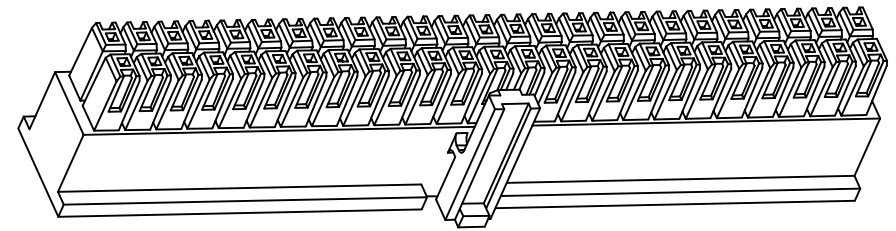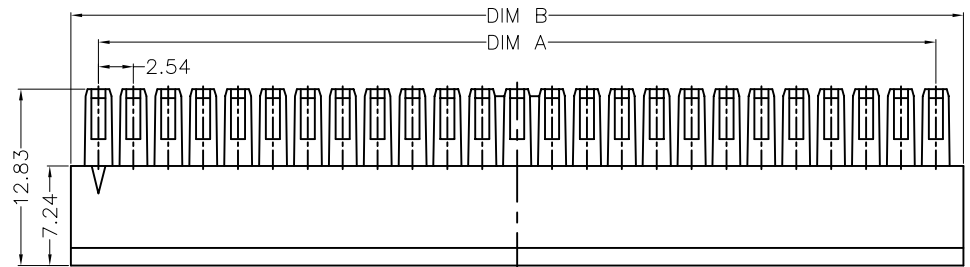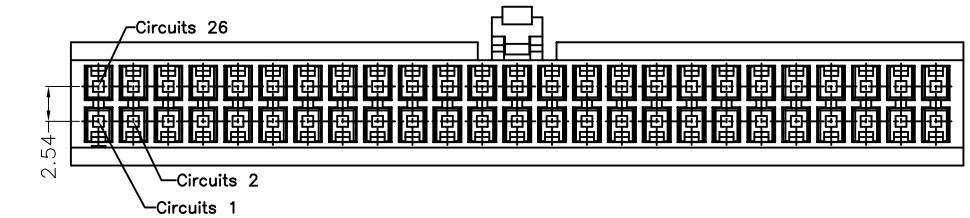

PART NO. INFORMATION


H254012-XX

SERIES NO: \_\_\_\_\_

PIN Q' PY: \_\_\_\_\_  
04~50

Dimensional Information(mm)

Circuits	DIM A	DIM B	Circuits	DIM A	DIM B
04	2.54	6.50	28	33.02	36.96
06	5.08	9.02	30	35.56	39.50
08	7.62	11.56	32	38.10	42.04
10	10.16	14.10	34	40.64	44.58
12	12.70	16.64	36	43.18	47.12
14	15.24	19.18	38	45.72	49.66
16	17.78	21.72	40	48.26	52.20
18	20.32	24.26	42	50.80	54.74
20	22.86	26.80	44	53.34	57.28
22	25.40	29.34	46	55.88	59.82
24	27.94	31.88	48	58.42	62.36
26	30.48	34.42	50	60.96	64.90



**Bestcreate Technology Limited**

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	±	0.40	X.*	±	3"
.XX	±	0.25	.X*	±	2"
.XXX	±	0.15	.XX*	±	1"

Website: [www.bsc-elec.com](http://www.bsc-elec.com)

Email: [bestcreate@bsc-elec.com](mailto:bestcreate@bsc-elec.com)

DESIGN: I. L

DATE: 2019. 3. 5

CHECKED:

DATE:

C. W

2019. 3. 5

APPROVED:

DATE:

C. W

2019. 3. 5

TITLE:

2.54 mm wire to Board housing

MATERILA:

PART NO:

H254012-XX

SIZE:

A4

FINSH:

DWG NO:

H254012-XX

REV: A


UNIT

mm

SCALE

1=1

QUALITY  
SYMBOLS



1

2

3

4

5

6

7

8