

RoHS Compliant



REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

Features:

- 1.04~50 circuits available;
- 2.Material
HOUSING: LCP, UL94 V-0, COLOR: NATURAL.
TERMINAL: PHOS BRONZE.
- 3.Mates with H254012-XX,

Rated Current: 3.0 AMP
Voltage rating: 1000V AC/DC
Contact resistance: 20mΩ Max
Insulation resistance: 1000MΩ Min
Ambient temperature rang: -25°C~+85°C


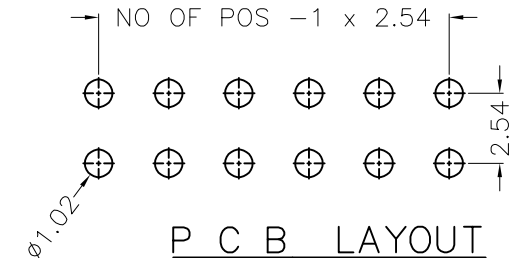
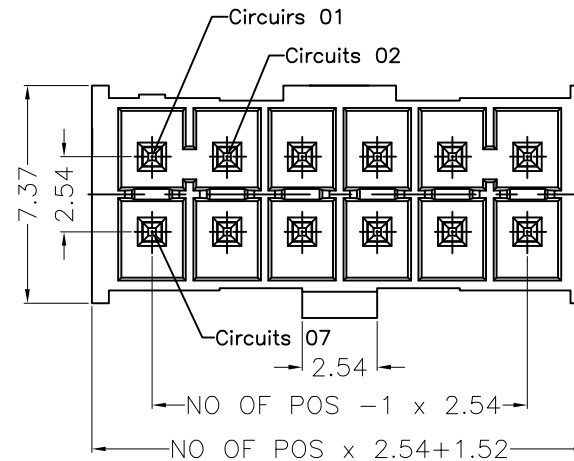


PART NO. INFORMATION

H254013-XX-XX

SERIES NO: _____
PIN Q' PY: _____
04~50

Plating: _____
0T: Tin-plated
G1: 1U" FLASH GOLD/TIN
G3: 3U" GOLD/TIN
G5: 5U" GOLD/TIN
G10: 10U" GOLD/TIN

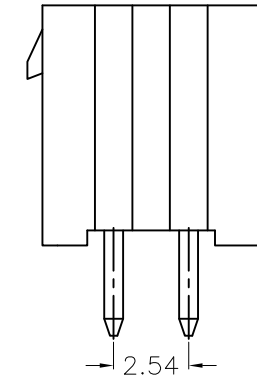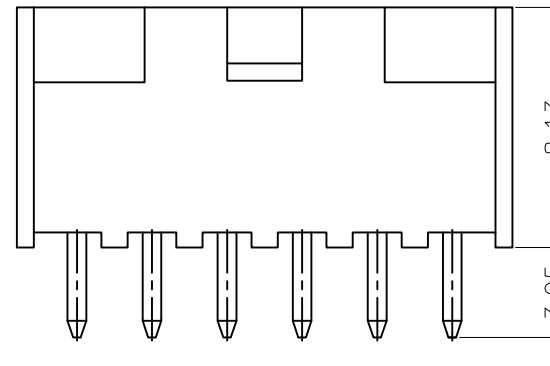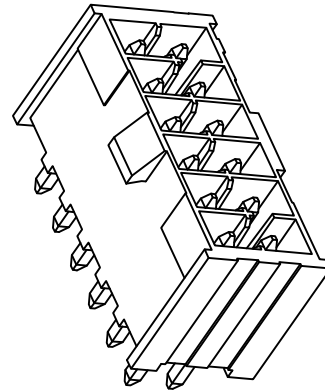

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	±	0.40	X.*	±	3"
.XX	±	0.25	.X*	±	2"
.XXX	±	0.15	.XX*	±	1"

Website: www.bsc-elec.com
Email: bestcreate@bsc-elec.com

DESIGN: DATE:

I. L. 2018. 3. 5

CHECKED: DATE:

C. W. 2018. 3. 5

APPROVED: DATE:

C. W. 2018. 3. 5

TITLE:

2.54 mm vertical header

MATERIAL:

PART NO:

H254013-XX-XX

SIZE:

A4

FINISH:

DWG NO:

H254013-XX-XX

REV: A

UNIT mm

SCALE 1=1

QUALITY SYMBOLS

