

RoHS Compliant

Features:

1. 4~16 circuits available;
2. Material: LCP UL94V-0 Black/Natural;
3. PIN Material: High conductivity copper alloy Tin-plated, SQ0.64;
4. Mates with H250012 housing;

Specification:

Current rating: 8A at 10A .

Voltage rating: 400V AC or 400V DC Max.

Contact resistance: 10mΩ Max.

Insulation resistance: 100MΩ Min.

Withstanding voltage: 1800VAC/minute.

Ambient temperature range: -40°C~105°C.

Dimensional information(mm)

Circuits	DIM A	DIM B
4	5.94	2.50
6	8.44	5.00
8	10.94	7.50
10	13.44	10.00
12	15.94	12.50
14	18.44	15.00
16	20.94	17.50

PART NO. INFORMATION

H250013-XX-X



SERIES NO: —

PIN Q'PY: —



04~16

A-BLACK (KEY A)


B-NATURAL (KEY B)

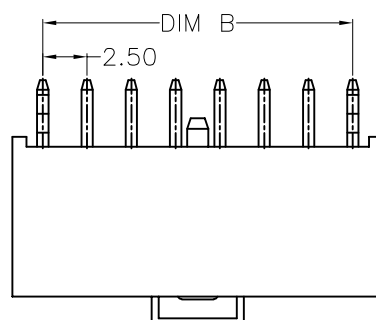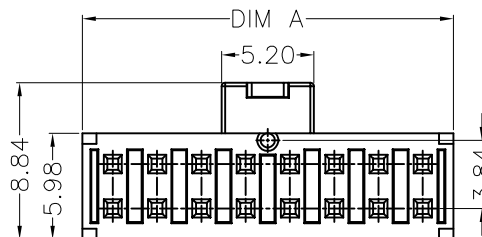


Last Circuit

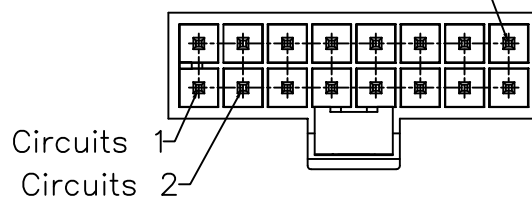


2*2 CKTS




2*3 CKTS



2*4 CKTS





2*5 CKTS




2*6 CKTS


REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

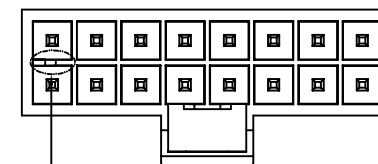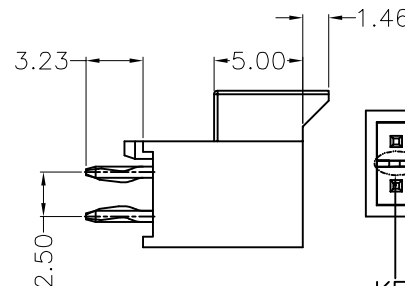



KEY A Color: Black

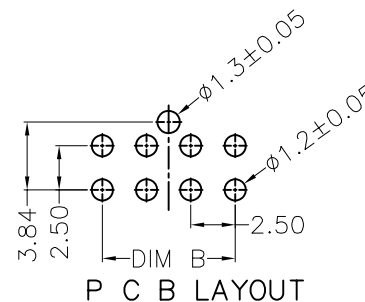

P C B LAYOUT

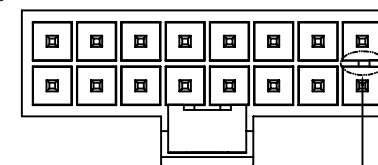

Color: Natural KEY B

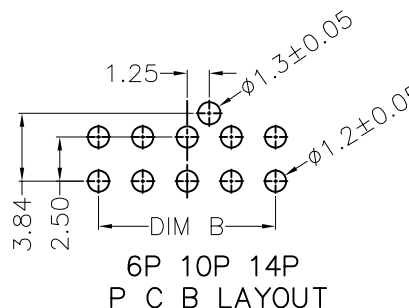6P 10P 14P
P C B LAYOUT

2*7 CKTS

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	±	0.40	X.	±	3"
.XX	±	0.25	.X.	±	2"
.XXX	±	0.15	.XX.	±	1"

Website: www.bsc-elec.com

Email: bestcreate@bsc-elec.com

DESIGN:

I. L

DATE:

2018. 3. 5

CHECKED:

DATE:

2018. 3. 5

C. W

APPROVED:

DATE:

2018. 3. 5

C. W

TITLE:

2.5 mm Right vertical header

MATERIAL:

PART NO:

H250013-XX-X

SIZE:

A4

FINISH:

DWG NO:

H250013-XX-X

REV:

A

UNIT


mm

SCALE

1=1

QUALITY

SYMBOLS



1

2

3

4

5

6

7

8