

RoHS Compliant




REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

Specifications


Current Rating: 7.0Amp
 Insulation Resistance: 100MΩ Min.
 Dielectric Withstanding: 500V AC
 Contact Resistance: 30MΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 Nylon 9T
 All materials must be ROHS materials

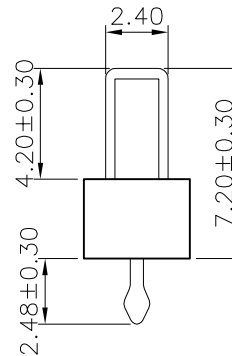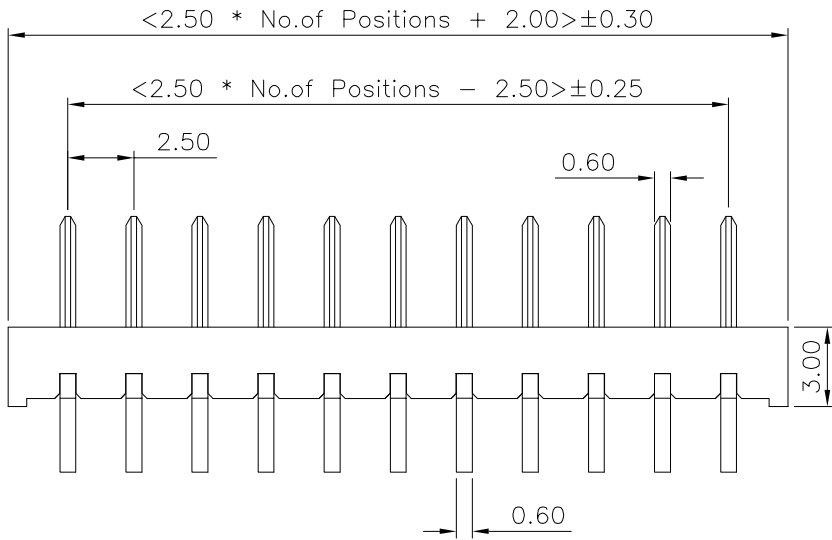

Recommended P.C.Board
 Hole Layout
 (Tolerance: ±0.05)



PART NO. INFORMATION

BH250-XX M X C 5 T - 001

NO.OF PINS PER ROW: 03-11
 GENDER: F: FEMALE, M: MALE
 CONTACT PLATED: 1:TIN, 2: GOLD FLASH
 PACKAGE: T: TUBE
 HOUSING COLOR: 5: BLACK
 HOUSING MATERIAL: C: PA9T

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.30	X'	± 5'
.X	± 0.25	.X'	± 3'
.XX	± 0.15	.XX'	± 2'

Website: www.bsc-elec.com
 Email: bestcreate@bsc-elec.com

DESIGN: I. L DATE: 2017. 3. 1

CHECKED: C. W DATE: 2017. 3. 1

APPROVED: C. W DATE: 2017. 3. 1

TITLE: 2.5MM BATTERY HOLDER MALE DIP TYPE

MATERILA:	PART NO:	SIZE:
FINSH:	BH250-XXMxC5T-001	A4
	DWG NO:	
	BH250-XXMxC5T-001	

REV: A	UNIT: mm	SCALE: 1=1	QUALITY SYMBOLS
--------	----------	------------	-----------------