

RoHS Compliant

Features:

- 1.2~8 circuits available;
- 2.Material:LCP UL94V-0 Black/Natural;
- 3.PIN Material:High conductivity copper alloy Tin-plated,SQ0.64;
- 6.Mates with H2500S12 housing;

Specification:

Current rating:8A at 10A .

Voltage rating:400V AC(RMS) or 400V DC Max.

Contact resistance:10mΩ Max.

Insulation resistance:100MΩ Min.

Withstanding voltage:1800VAC/minute.

Ambient temperature range: -40℃~105℃.















Dimensional information(mm)

Circuits	DIM A	DIM B
2	5.94	2.50
3	8.44	5.00
4	10.94	7.50
5	13.44	10.00
6	15.94	12.50
7	18.44	15.00
8	20.94	17.50

PART NO. INFORMATION

H2500S13-XX-X
SERIES NO: _____
PIN Q'PY: _____
02~08
A-BLACK (KEY A)
B-NATURE (KEY B)

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

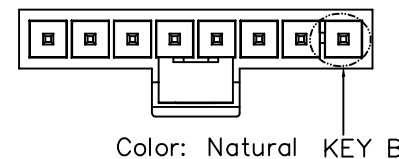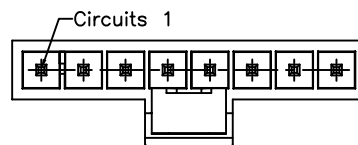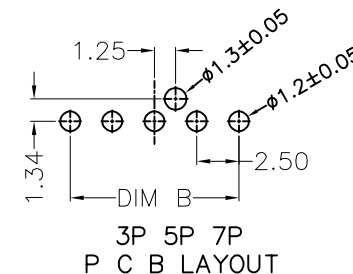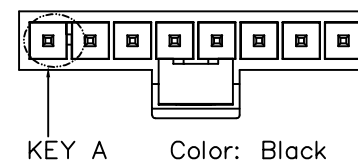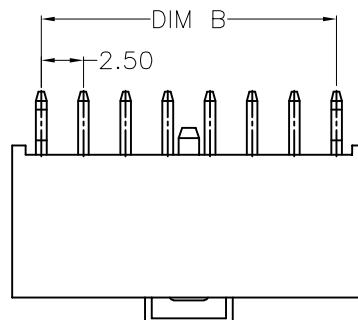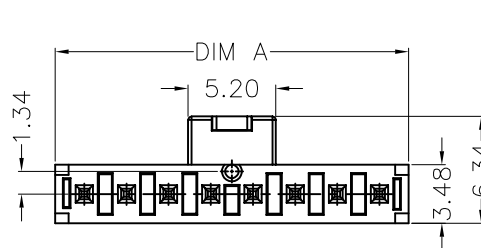

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	±	0.40	X.*	±	3"
.XX	±	0.25	.X*	±	2"
.XXX	±	0.15	.XX*	±	1"

Website: www.bsc-elec.com
Email: bestcreate@bsc-elec.com

DESIGN: DATE:

I. L. 2018. 3. 5

CHECKED: DATE:

C. W. 2018. 3. 5

APPROVED: DATE:

C. W. 2018. 3. 5

TITLE:

2.5mm single row vertical header

MATERIAL:

PART NO: H2500S13-XX-X

SIZE: A4

FINISH:

DWG NO: H2500S13-XX-X

REV: A

UNIT mm

SCALE 1=1

QUALITY SYMBOLS

