
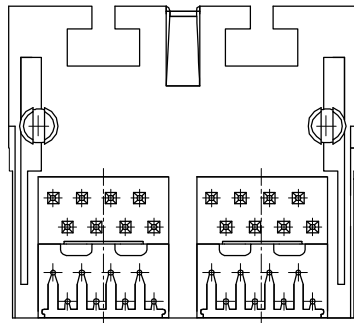
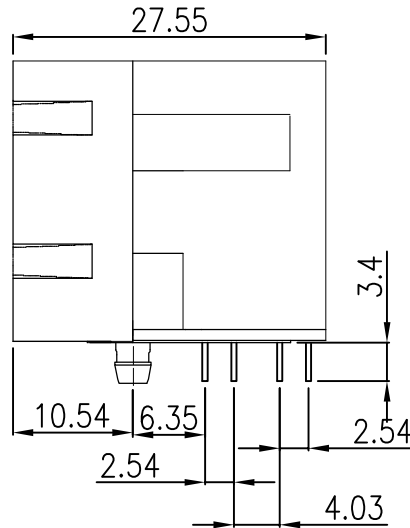


RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

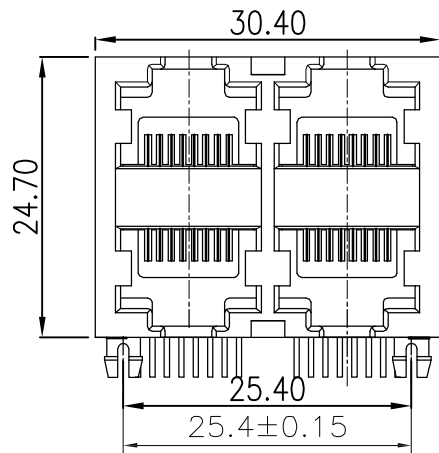

NOTES

MATERIAL
 1. HOUSING MATERIAL : THERMO PLASTICS UL94V-0.
 2. CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
 3. PLATING : GOLD FLASH PLATING OVER NICKEL.

ELECTRICAL
 1. VOLTAGE RATING : 125 VAC RMS.
 2. CURRENT RATING : 1.5 AMP.
 3. CONTACT RESISTANCE : 40 MILLIOHMS MAX.
 4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 100V DC .
 5. DIELECTRIC DIELECTRIC RESISTANCE : 500V DC RMS 50Hz. 1MIN.

MECHANICAL
 1. DURRABILITY : 750 CYCLES MIN.
 2. MATING/UNMATING FORCE : 2.24 KG.F MAX.

ENVIRONMENTAL:
 1. STORAGE : -40°C ~ +85°C.
 2. OPERATION : 0° C TO 70° C.

PART NO. INFORMATION

RJ01- X 5 0 X - 114

CONTACT PLATED
 1: G/F 2: AU 3U"
 3: AU 6U" 4: AU 15U"
 5: AU 30U"
 PACKAGE
 R: TAPE REEL
 T: TRAY

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	± 0.35	X'	± 3'
.XX	± 0.25	.X'	± 2'
.XXX	± 0.15	.XX'	± 1'

Website: www.bsc-elec.com
 Email: bestcreate@bsc-elec.com

DESIGN: I.L DATE: 2017.3.1

CHECKED: C.W DATE: 2017.3.1

APPROVED: C.W DATE: 2017.3.1

TITLE: 5921 2X2 RJ45 FEMALE CONNECTOR DIP TYPE

MATERILA: FINSH: PART NO: RJ01-X50X-114 SIZE: A4

DWG NO: RJ01-X50X-114

REV: A UNIT: mm SCALE: 1=1 QUALITY SYMBOLS: