




RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

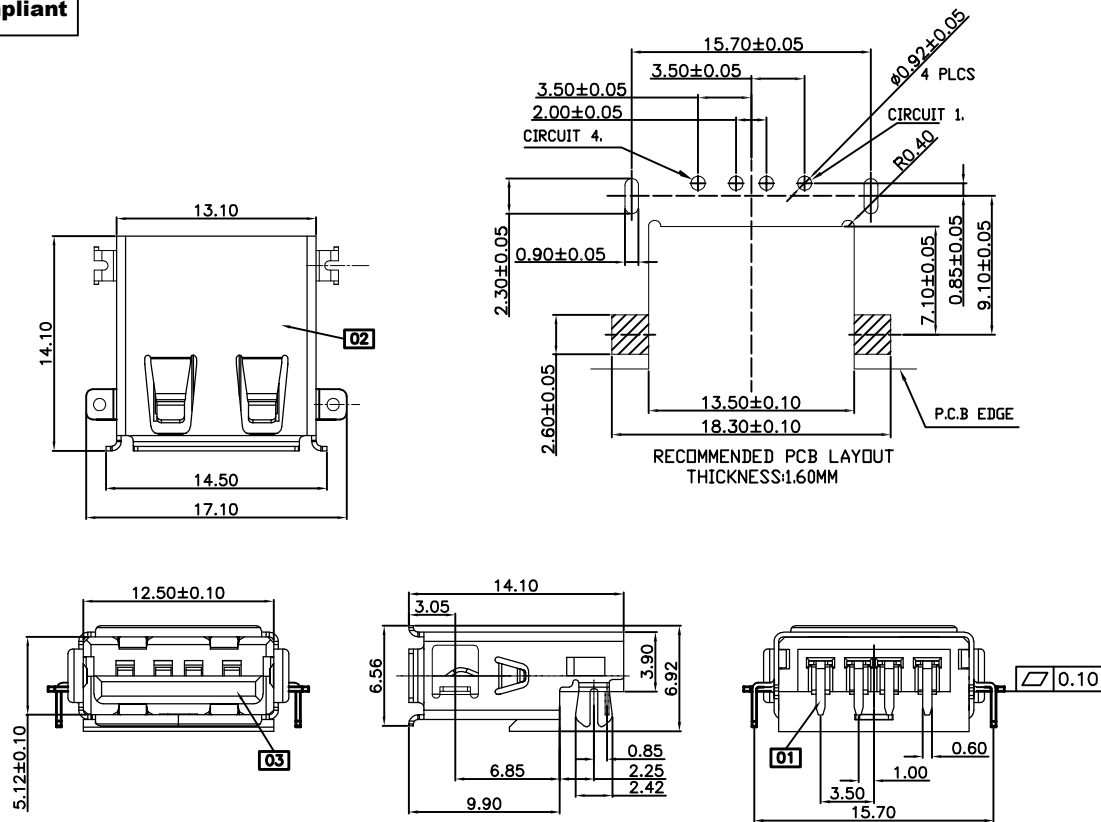

NOTE:
 1. 特性(characteristics):
 1.1 额定电流: 2.5A at 30V AC MAX.
 Rating Current :2.5A at 30V AC MAX.
 1.2 接触阻抗: 30mΩ MAX.
 Contact Resistance:30 MEGA OHMS MAX.
 1.3 绝缘阻抗: 1000 MEGA OHMS MIN.
 Insulation Resistance:1000 MEGA OHMS MIN.
 1.4 耐电压: 500V AC/minute.
 Withstanding Voltage:500V AC/minute.
 1.5 插入力: 3.50Kgf MAX
 Mating force:3.50Kgf MAX
 1.6 拔出力: 1.0Kgf Min.
 Extraction force:1.0Kgf Min.
 1.7 耐久性: 3000cycles Min:200cycles/Hour:
 Durability:3000cycles Min:200 cycles/Hour:

PART NO. INFORMATION

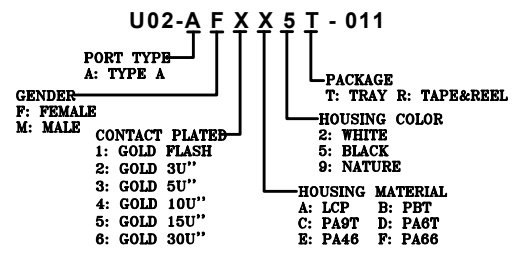

COLOR	HOUSING	HOUSING P/N	P/N
BLACK	PA9T	S-36120049	U02-AFXA5T-007
WHITE	LCP	S-16110048	U02-AFXA5T-007

ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS
03	HOUSING	SEE NOTE1	ROHS UL94V-0	见说明1
02	SHELL	C2680	Ni 50u"Min	T-1010422
01	CONTACT	C5191R	Ni 50u"Min Au 5u"Min Sn 80u"Min	D-1010424

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DESIGN: I. L	DATE: 2017. 3. 1	TITLE: USB A/F CONNECTOR WITH FLANGE	
X. ± 0.50	X.' ± 3'	CHECKED: C. W	DATE: 2017. 3. 1	MATERIAL: A4	PART NO: U02-AFXX5T-011
.X ± 0.25	.X' ± 2'	APPROVED: C. W	DATE: 2017. 3. 1	FINISH: U02-AFXX5T-011	SIZE: A4
.XX ± 0.15	.XX' ± 1'	Website:www.bsc-elec.com		DWC NO: U02-AFXX5T-011	
Email:bestcreate@bsc-elec.com					

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------