

RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN
------	-------------	------	--------

Features:

- 1.01~05 circuits available;
- 2.Material: PA66+30%GF 94V-0;
- 3.Contact: Phosphor Bronze;
- 4.Finished: Tin-plated or Gold-Flash;
- 5.Mates with H7920S12 Housing,
- 6.Coloe: Black/Natural/Red

Specification:

NO.of contacts	10 AWG	12 AWG	14 AWG	16 AWG
1	30 A	25 A	20 A	15 A
2	25 A	20 A	18 A	15 A
3	25 A	20 A	18 A	15 A
4	22 A	18 A	15 A	13 A
5	22 A	18 A	15 A	13 A

Current rating: 30A AC/DC.

Voltage rating: 600V AC(RMS) or 600V DC Max.

Contact resistance: 5mΩ Max.

Insulation resistance: 1000MΩ Min.

Withstanding voltage: 2500V AC/minute.

Ambient temperature rang: -35°C~90°C.

PART NO. INFORMATION

H7920S13-XX-XX-XX

SERIES NO: _____

PIN Q'PY: _____
01~05



Color: _____

CW-White
CB-Black
CR-Red







PLATING:

0T-Tin-plated
G1-G/F(ALL) 1U"


1 Pos.




2 to 5 Pos

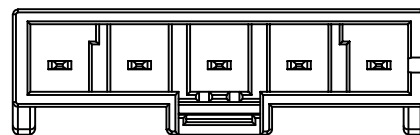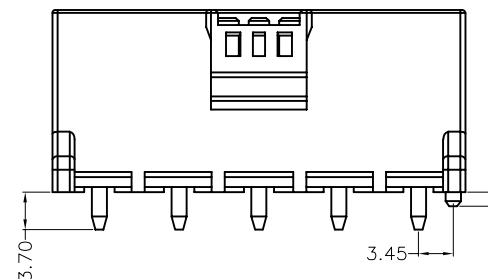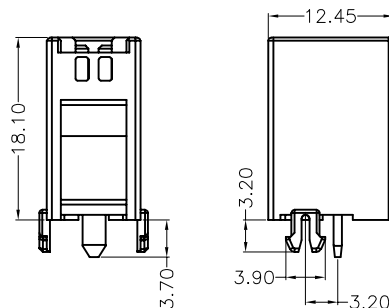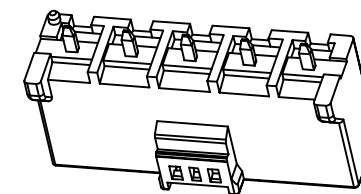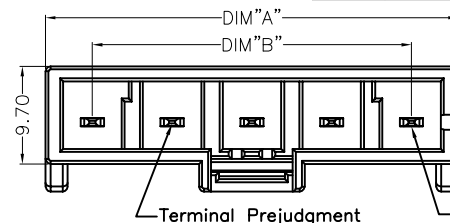

Guide Key : Inside Color : White

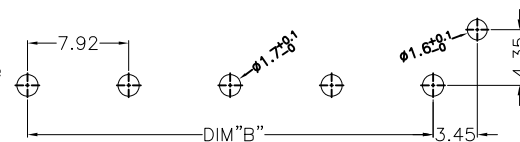


PCB 2 to 5 Pos




PCB 1 Pos

Dimensional Information(mm)

No.of Contact	DIM A	DIM B
1		
2	17.22	7.92
3	25.14	15.84
4	33.06	23.76
5	40.98	31.68

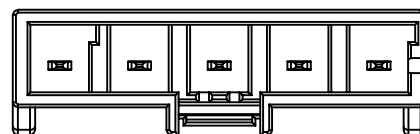

Guide Key : Left Side, Color : Red

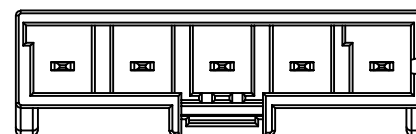

Guide Key : Right Side Color : Black

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	±	0.40	X.*	±	3"
.XX	±	0.25	.X.*	±	2"
.XXX	±	0.15	.XX.*	±	1"

Website: www.bsc-elec.comEmail: bestcreate@bsc-elec.com

DESIGN:

DATE:

I. L

2018.3.5

CHECKED:

DATE:

C. W

2018.3.5

APPROVED:

DATE:

C. W

2018.3.5

TITLE:

7.92 mm vertical header

MATERILA:

PART NO:

H7920S13-XX-XX-XX

SIZE:

A4

FINSH:

DWG NO:

H7920S13-XX-XX-XX


REV: A

UNIT

mm

SCALE

1=1

QUALITY
SYMBOLS

1

2

3

4

5

6

7

8