
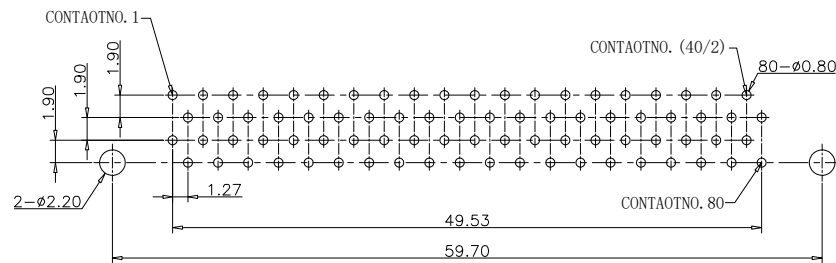
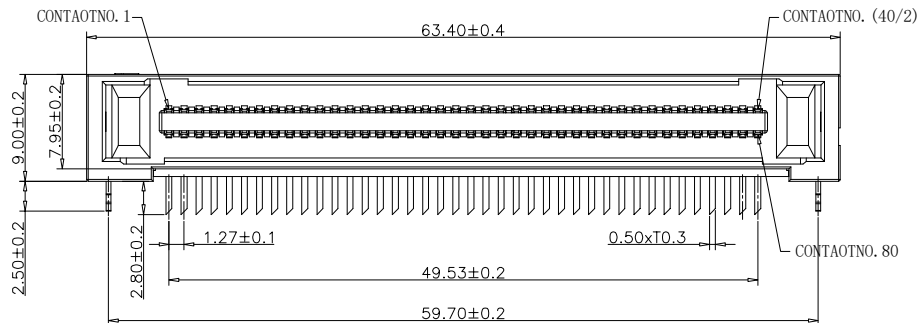





RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

- 规格说明:Specifications:
- 电气特性:Electrical:
- 1. 额定电流:Current Rating: 1.0A/contact terminal
  - 2. 接触阻抗>Contact Resistance: 40 milliohms MAX
  - 3. 耐压:Dielectric Withstanding Voltage: 500 V AC For one minute
  - 4. 绝缘阻抗:Insulation Resistance: 100MEGA ohms MIN
  - 5. 工作温度:Operating Temperature: -40°C to +80°C
- 原材料:Raw material:
- 1. 塑胶:Plastic cement: PBT+30%GF UL 94V-0 Black
  - 2. 端子:Contact:Copper Alloy C5210
  - 3. 卡钩:Hook: Copper Alloy C5210
- 电镀:Electroplate:
- 1. 端子:Contact: Plated Gold 6u" in Mating Area; Tin On Solder Talls
  - 2. 卡钩:Hook: Tin Plating

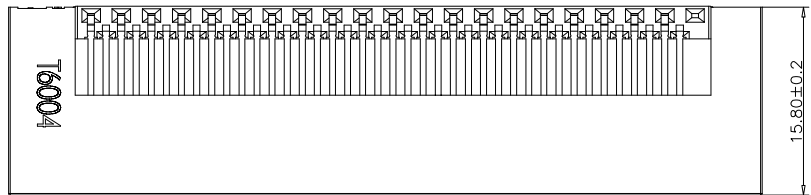

RECOMMENDED PCB LAYOUT  
PCB图仅供参考

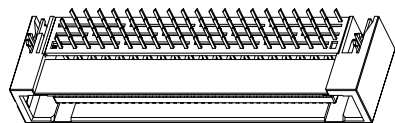

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	± 0.30	.X'	± 3'
.XX	± 0.25	.X''	± 2'
.XXX	± 0.15	.XXX'	± 1'

DESIGN: I. L DATE: 2017. 3. 1

CHECKED: C. W DATE: 2017. 3. 1

APPROVED: C. W DATE: 2017. 3. 1

TITLE: 80P 1.27MM 80P SCSI MALE CONNECTOR TX25 REPLACEMENT OF TX25-80P-LT-H1E

MATERILA: PART NO: M80SCSI-TX25 SIZE: A4

FINSH: DWG NO: M80SCSI-TX25

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------

Website:www.bsc-elec.com  
Email:bestcreate@bsc-elec.com