



RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

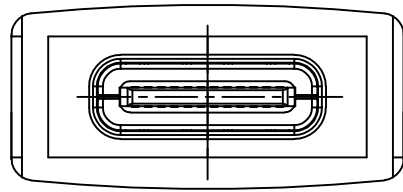


14.10

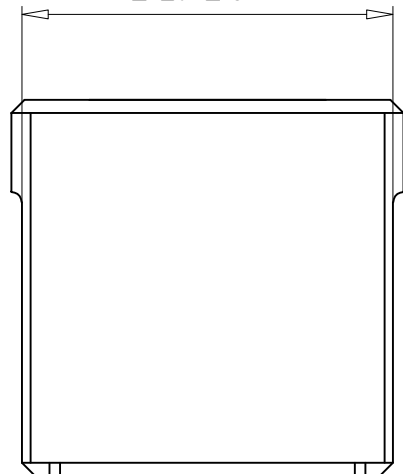


12.00

4.50

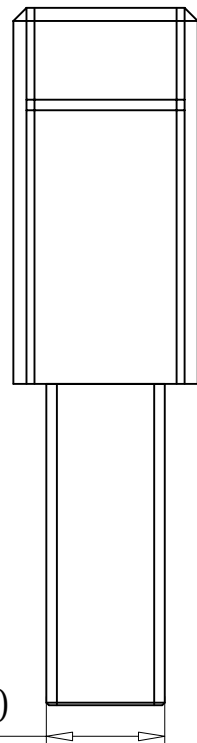

14.90

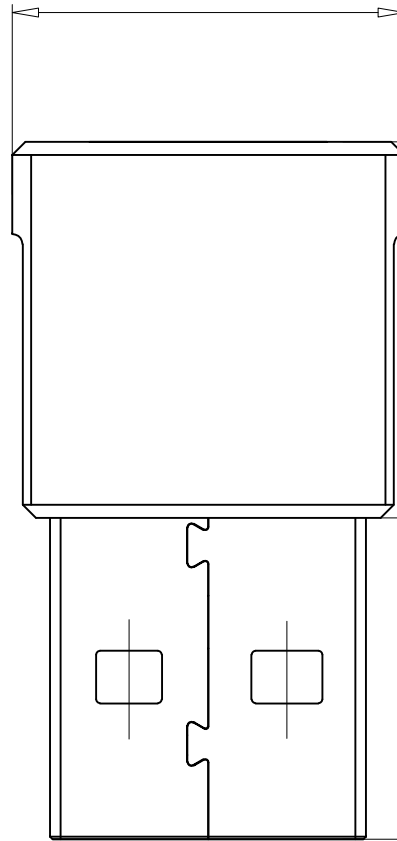

12.20

26.50

NOTE:

1. ELECTRICAL CHARACTERISTICS:
  - 2.1 CONTACT RESISTANCE: 80mΩ Max
  - 2.2 CONTACT CURRENT RATING: 1.5 A
  - 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 100 V R. M. S.
  - 2.4 INSULATION RESISTANCE 100 MEGOHMS Min
  - 2.5 OPERATING TEMPERATURE: -25° C ~ 75° C
2. MECHANICAL CHARACTERISTICS:
  - 2.1 MATING FORCE: USB CM 5~20N & USB3.0 AF 35N Max.
  - 2.2 UNMATED FORCE: USB CM 8~20N & USB3.0 AF 10N Min.
3. PLATING
  - 3.1 TERMINAL CONTACT: (SEE TAB) GOLD PLATING  
ALL OVER 50u"MIN NICKEL
  - 3.2 SHELL: 50u"MIN. NICEL ALL OVER

Item	Name	Part Number	Description	QTY
3	Shell		USB3.0 AM Plastic cover 28*16.24*8.52mm,white&Black	1PCS
2	PVC		PVC 45P,COLOR: WHITE&Black	0.005KG
1	PCBA		USB3.0 AM TO TYPE CF R:5.1k C:10nF,nickel plated	1PCS

**Bestcreate Technology Limited**

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	±	0.50	X.'	±	5'
.X	±	0.30	.X'	±	2'
.XX	±	0.10	.XX'	±	1'

Website: www.bsc-elec.com  
Email: bestcreate@bsc-elec.com

DESIGN: I.L. DATE: 2017.3.1  
CHECKED: C.W. DATE: 2017.3.1  
APPROVED: C.W. DATE: 2017.3.1

TITLE: USB3.0 AM TO TYPE CF ADAPTER  
MATERILA: PART NO: AD30AMCF-026 SIZE: A4  
FINSH: DWG NO: AD30AMCF-026

REV: A UNIT mm SCALE 1=1 QUALITY SYMBOLS