
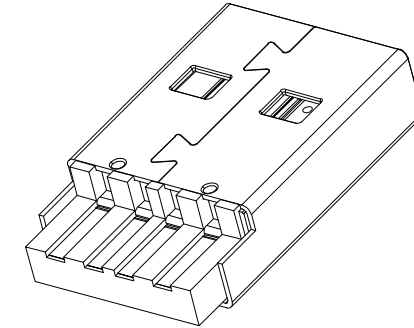


RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

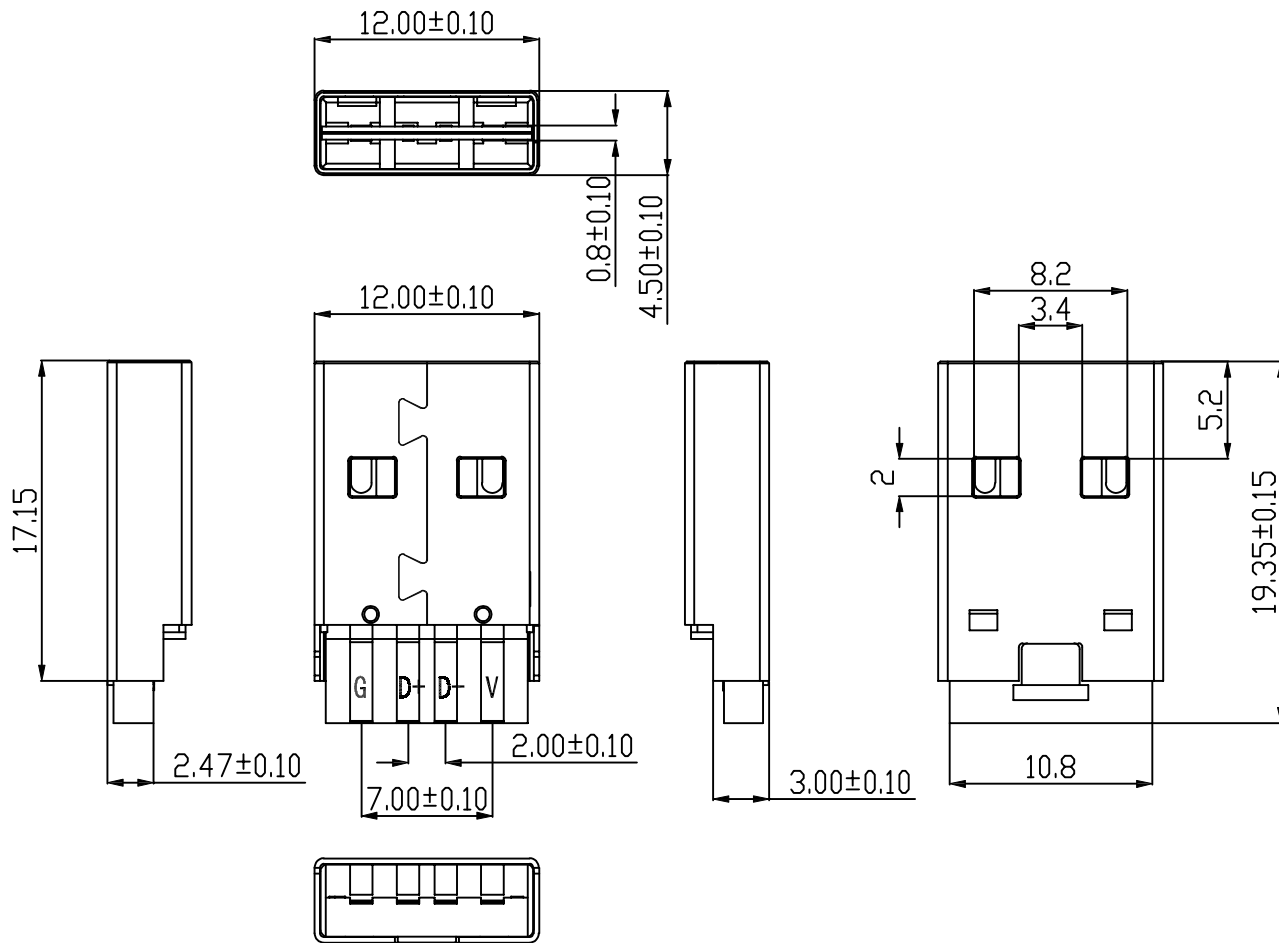

NOTE:

- Material: contacts: C2680 EH T=0.20
insulator: PBT
shell: SPCC T=0.30
- Plating:
contacts: a. Nickel plated 50
b. Gold plated: 1U" 3U" 30U"
Shell: Cu plated 100U" Nickel plated 100U"

PART NO. INFORMATION

U02-A M X X 5 T - 006

PORT TYPE
A: TYPE A

GENDER
F: FEMALE
M: MALE

CONTACT PLATED
1: GOLD FLASH
2: GOLD 3U"
3: GOLD 5U"
4: GOLD 10U"
5: GOLD 15U"
6: GOLD 30U"

PACKAGE
T: TRAY R: TAPE&REEL

HOUSING COLOR
2: WHITE
5: BLACK
9: NATURE

HOUSING MATERIAL
A: LCP B: PBT
C: PA9T D: PA6T
E: PA46 F: PA66

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.38	X.'	± 3'
.X	± 0.30	.X'	± 2'
.XX	± 0.25	.XX'	± 1'

Website: www.bsc-elec.com
Email: bestcreate@bsc-elec.com

DESIGN: I. L. DATE: 2017. 3. 1
CHECKED: C. W. DATE: 2017. 3. 1
APPROVED: C. W. DATE: 2017. 3. 1

TITLE: USB 2.0 A/M DOUBLE-SIDE PLUG, WIRE SOLDERING

MATERILA:	PART NO: U02-AMXX5T-006	SIZE: A4
FINSH:	DWG NO: U02-AMXX5T-006	

REV: A UNIT mm SCALE 1=1 QUALITY SYMBOLS