

RoHS Compliant

Features:

- 1.04~16 circuits available;
- 2.Material:PA66 UL 94V-0;
- 3.Accepts H350011 terminal;
- 4.Mates with H350013,H350014 H350016 header;
- 5.Coloe: Black/Natural;

Specification:

Current rating:14A at 16A.
Voltage rating:400V AC(RMS) or 400V DC Max.
Contact resistance:10mΩ Max.
Insulation resistance:100MΩ Min.
Withstanding voltage:1800VAC/minute.
Ambient temperature range: -40°C~105°C.

Dimensional infotmation(mm)

Circuits	DIM A	DIM B
4	3.50	8.00
6	7.00	11.50
8	10.50	15.00
10	14.00	18.50
12	17.50	22.00
14	21.00	25.50
16	24.50	29.00

PART NO. INFORMATION

H350012-XX-XX-X

SERIES NO: _____











PIN Q' PY: _____

04~16

TPA: _____

00:Without TPA
0E:With TPA

A-BLACK (A KEY)
B-NATURE (B KEY)

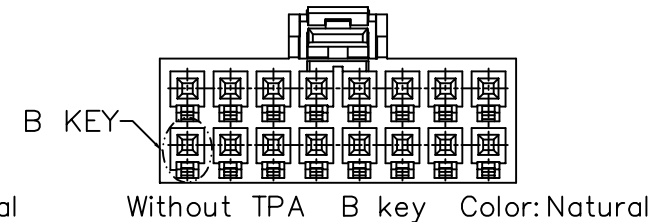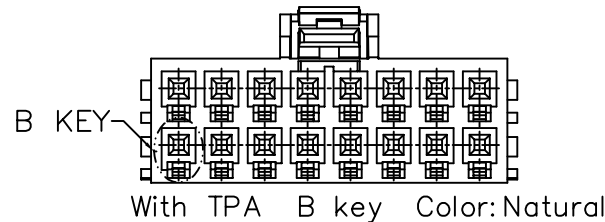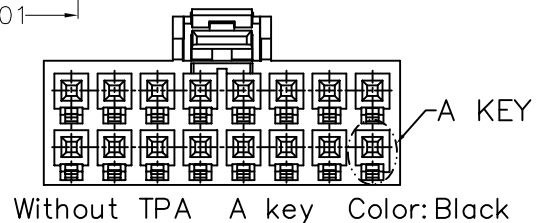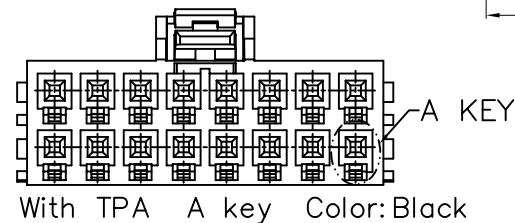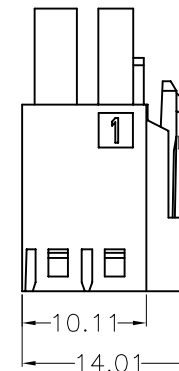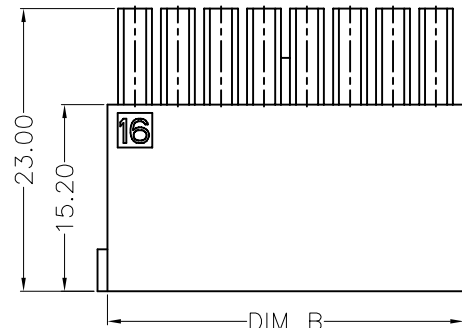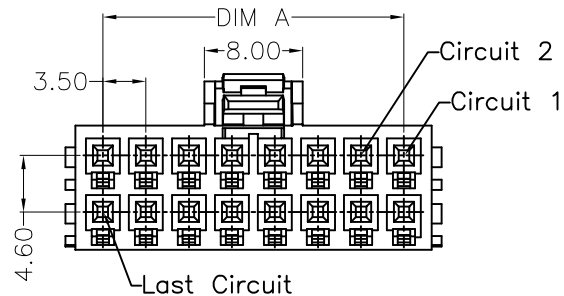

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	± 0.40	X'	± 3'
.XX	± 0.25	.X'	± 2'
.XXX	± 0.15	.XX'	± 1'

Website: www.bsc-elec.com

Email: bestcreate@bsc-elec.com

DESIGN:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

TITLE:

3.5 mm wire to Board housing

MATERILA:

PART NO:

H350012-XX-XX-X

SIZE:

A4

FINSH:

DWG NO:

H350012-XX-XX-X

REV: A

UNIT mm

SCALE 1=1

QUALITY SYMBOLS

