

RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN




Features:

1. 02~08 circuits available;
2. Material: Nylon 66 UL 94V-0;
3. Accepts H750S11 terminal;
4. Mates with H7500S13 H7500S14 header;
5. Color: Black/Natural

Current rating: 10A or 18A or 32A AC/DC.
Voltage rating: 600V AC or 600V DC Max.
Contact resistance: 5mΩ Max.
Insulation resistance: 1000MΩ Min.
Withstanding voltage: 5000VAC/minute.
Ambient temperature range: -45°C~105°C.

Dimensional Information (mm)

Circuits	DIM A	DIM B	DIM C
02	15.70	7.50	12.00
03	23.20	15.00	12.60
04	30.70	22.50	19.30
05	38.20	30.00	19.30
06	45.70	37.50	19.30
07	53.20	45.00	19.30
08	60.70	52.50	19.30

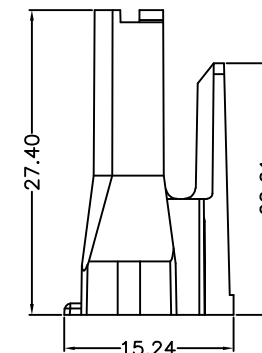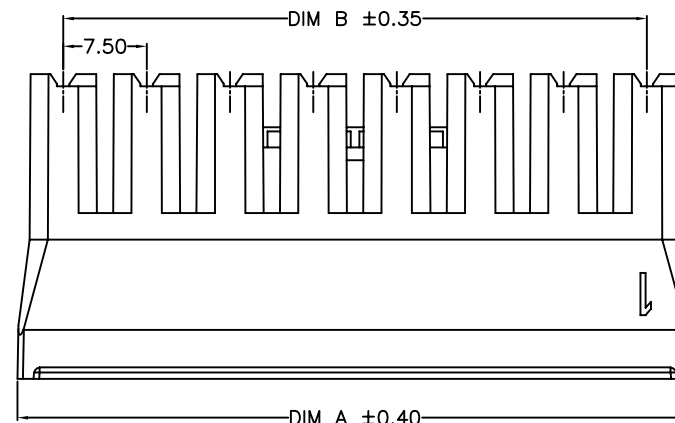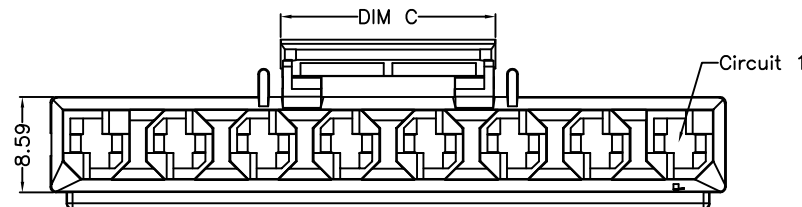

PART NO. INFORMATION


H7500S12-XX-XX

SERIES NO:


PIN Q'PY:

02~08


Color:
CN-Natural
CB-Black




8 CKTS




2 CKTS




3 CKTS




4 CKTS



7 CKTS



6 CKTS



5 CKTS

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	±	0.40	X.*	±	3"
.XX	±	0.25	.X*	±	2"
.XXX	±	0.15	.XX*	±	1"

Website: www.bsc-elec.com
Email: bestcreate@bsc-elec.com

DESIGN:

DATE:

I. L

2018.3.5

CHECKED:

DATE:

C. W

2018.3.5

APPROVED:

DATE:

C. W

2018.3.5

TITLE:

7.50 mm wire to Board housing

MATERIAL:

PART NO:

H7500S12-XX-XX

SIZE:

A4

FINISH:

DWG NO:

H7500S12-XX-XX

REV:

A


UNIT

mm

SCALE

1=1

QUALITY
SYMBOLS



1

2

3

4

5

6

7

8